

LEADING PROJECT
SUPPLIER & STOCKIST
OF ALL TYPES OF
ELECTRICAL GOODS



Chandan Electric Corporation

Since 1985

Office Add. / 89, Princess Street, 2nd Flr., Peerbhoy Building, Pathak Wadi, Lohar Chawl, Mum-02.

Telephone / 022 - 2208 7580 / 3956 7492 / 4003 9101 **Fax** / 022 - 2201 9101

Mobile / 91 - 9820486600 / 9029895008 **Website** / www.chandanelectric.in

Email / chandan_electric@hotmail.co.in / info.chandanelectric@gmail.com

Company Profile

ARCO LITES

Manufacture of :

Domestic, Commercial, Industrial & Decorative Profile lighting



Arco Lites is a reputed manufacturing company with ISO certified (ISO 9001:2015) over 35 years of experience in enlightening over millions of satisfied customers. Our Products are approved from BIS (R-71011754) (R-71011711).

Driving force behind this success is one theme, which integrates and unites the entire manufacturing chain is **"Customer is the king and quality speaks louder than words."** This theme has been understood & imbibed by the entire team from unskilled workman to the top management.

We majorly work in Outdoor and Industrial Products like LED Street Lights, Flood Lights, High-bay, Gate lights. All our products are thoroughly tested before entering the market. We test our products in extreme weather conditions by running them through specialized LAB machines that imitate extreme temperatures such as desert heat and Nordic cold, as well as high and low humidity. We conduct both electrical as mechanical tests to ensure a high grade quality standard.

We always believe in new innovation with new expansion. Loyalty is our motto to provide you excellent service.

Our mission and strength

- ✓ "Light - up your lives"
- ✓ Our backbone is timely deliveries & state of art products which Customers will cherish for years.
- ✓ Improve our service continuously.
- ✓ Respond immediately to the changing needs of our clients
- ✓ Achieve complete customer satisfaction.



Certificate of Registration

(Quality Management System)

KVQA CERTIFICATION SERVICES PVT. LTD.

This is to certify that the Quality Management System of

ARCO LITES

41/42, B T COMPOUND, MALAD (WEST), MUMBAI - 400064

Has been found to be of the Quality Management System Standard

ISO 9001:2015

This certificate is valid for the following product or service range

**MANUFACTURING OF LIGHTING LUMINARIES
& L.E.D. FITTINGS.**

1st Surveillance Due On: 28/11/2020: Done On:

2nd Surveillance Due On: 28/11/2021: Done On:

Certificate No: KDACCS202001160

Date of Issue: 28, January, 2020

Valid Until: 27, January, 2023*

Issued by

Authorised signatory KVQA



eiaCI
مركز الاعتمادات العالمية للاعتماد
Emirates International Accreditation Centre
CB-045-QMS

To Check the Status of the Certification kindly log on to www.kvqa.in
F-300, Sector - 63, Noida U.P. India. Ph- 011 -22711940, 22711941
Email : delhi@kvqaIndia.com

*Subject to successful completion of surveillance audits



भारतीय मानक ब्यूरो

(उपभोक्ता मामले, खाद्य एवं सार्वजनिक विभाग, भारत सरकार)

BUREAU OF INDIAN STANDARDS


(Ministry of Consumer Affairs, Food & Public Distribution,
Govt. of India)

मानक भवन, 9 बहादुर शाह जफर मार्ग, नई दिल्ली - 110002
Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi - 110002
दूरभाष/Phone: +91-11-23230856/2323010131/23233375/23239402
ई-मेल/E-mail: registration@bis.gov.in
वेबसाइट/Website: https://bis.gov.in/, https://www.crsbis.in/BIS/

Our Ref: Registration/CRS 2020-0790/R-71011754

Date:11-03-2020

Subject : Licence Document

Manufacturing Unit:	ARCO LITES 41 & 42, BOMBAY TALKIES COMPOUND, OPP. MAHAVEER METAL, MALAD WEST, MUMBAI - 400064 MAHARASHTRA, India-400064 info@arcolites.com 9820187036	
---------------------	--	---

Dear Sir,

1. With reference to your Application, we are pleased to inform you that it has been decided to grant you licence as per details given below :

PRODUCT :	LED Luminaires for road and street lighting (LED STREET LIGHT)
IS NO :	IS 10322 (PART 5/SEC 3) : 2012
BRAND :	Skyla
MODEL :	100W ARRAY,120W ECO-B,150W ECO-B,15W ARRAY,200W ECO-B,20W ARRAY,24W ARRAY,30W ARRAY,36W ARRAY,50W ARRAY,50W LEAF,60W ECO-B
FACTORY ADDRESS :	41 & 42, BOMBAY TALKIES COMPOUND, OPP. MAHAVEER METAL, MALAD WEST, MUMBAI - 400064 MAHARASHTRA, India-400064

- The licence is being granted for your unit located at the address and for the brand and models mentioned at serial no 1 above.
- The number assigned to this Licence is **R-71011754** which has been made operative from **11-03-2020** and is valid upto **10-03-2022**. The Licence Number should invariably be referred to in your future correspondence.
- The rights and privileges under the licence shall not be exercised by any other factory / organization at any other location. This licence is not transferable. In the event of shifting of the manufacturing machinery from the registered premises to some other place use of the licence Number shall be stopped and BIS shall be informed.
- The licensee shall comply with the provisions of the Act, rules and regulations framed thereunder and as amended from time to time.
- The licensee shall follow the guidelines for the use of Standard Mark and labeling requirements as per Annex-I.
- The licensee shall not use the licence in any manner which contravenes the provisions of Act, rules and regulations framed thereunder and as amended from time to time.
- Upon expiry of validity, stoppage or suspension or cancellation of licence, you shall discontinue forthwith the self declaration of conformity to the relevant Indian Standard(s) and withdraw all promotional and advertising matter which contains any reference thereto.
- For renewal of licence, the licensee shall have to apply to BIS three months in advance before expiration of the licence and application form for renewal is available on BIS website.
- The licence is not transferable. Kindly acknowledge receipt of this letter.

Thanking you,

Yours faithfully,
(Mohit Prabhat)
Sc. C
Telfax : +91-11-23230856
E-mail: registration@bis.gov.in

Note: This is a system generated letter. Hence signature is not required.
To verify authentication of letter, kindly scan the QR code on this letter.



भारतीय मानक ब्यूरो

(उपभोक्ता मामले, खाद्य एवं सार्वजनिक वितरण विभाग, भारत सरकार)

BUREAU OF INDIAN STANDARDS


(Ministry of Consumer Affairs, Food & Public Distribution,
Govt. of India)

मानक भवन, 9 बालिंदर शाह जफर मार्ग, नई दिल्ली - 110002
Mmak Bhavan, 9 Balindur Shah Zafar Marg, New Delhi - 110002
दूरभाष / Phone: +91-11-23230856/2323010131/23233375/23239402
ई-मेल / E-mail: registration@bis.gov.in
वेबसाइट / Website: <https://bis.gov.in/>, <https://www.csbis.in/BIS/>

Our Ref: Registration/CRS 2020-0855/R-71011711

Date:09-03-2020

Subject : Licence Document

Manufacturing Unit:	ARCO LITES 41 & 42, BOMBAY TALKIES COMPOUND, OPP. MAHAVEER METAL, MALAD WEST, MUMBAI - 400064 MAHARASHTRA, India-400064 info@arcolites.com 9820187036	
---------------------	---	---

Dear Sir,

1. With reference to your Application, we are pleased to inform you that it has been decided to grant you licence as per details given below :

PRODUCT :	LED FLOOD LIGHTS
IS NO :	IS 10322 (PART 5/SEC 5) : 2013
BRAND :	Skyla
MODEL :	100W BACK CHOKE, 100W LENZA, 100W NEXA, 100W STAR, 120W BACK CHOKE, 150W BACK CHOKE, 150W LENZA, 150W STAR, 200W BACK CHOKE, 200W STAR, 300W BACK CHOKE, 30W LENZA, 400W BACK CHOKE, 50W LENZA, 50W STAR, 75W BACK CHOKE
FACTORY ADDRESS :	41 & 42, BOMBAY TALKIES COMPOUND, OPP. MAHAVEER METAL, MALAD WEST, MUMBAI - 400064 MAHARASHTRA, India-400064

- The licence is being granted for your unit located at the address and for the brand and models mentioned at serial no 1 above.
- The number assigned to this Licence is **R-71011711** which has been made operative from **09-03-2020** and is valid upto **08-03-2022** The Licence Number should invariably be referred to in your future correspondence.
- The rights and privileges under the licence shall not be exercised by any other factory / organization at any other location. This licence is not transferable. In the event of shifting of the manufacturing machinery from the registered premises to some other place use of the licence Number shall be stopped and BIS shall be informed.
- The licensee shall comply with the provisions of the Act, rules and regulations framed thereunder and as amended from time to time.
- The licensee shall follow the guidelines for the use of Standard Mark and labeling requirements as per Annex-I.
- The licensee shall not use the licence in any manner which contravenes the provisions of Act, rules and regulations framed thereunder and as amended from time to time.
- Upon expiry of validity, stoppage or suspension or cancellation of licence, you shall discontinue forthwith the self declaration of conformity to the relevant Indian Standard(s) and withdraw all promotional and advertising matter which contains any reference thereto.
- For renewal of licence, the licensee shall have to apply to BIS three months in advance before expiration of the licence and application form for renewal is available on BIS website.
- The licence is not transferable. Kindly acknowledge receipt of this letter.

Thanking you,

Yours faithfully,
(Sundeep Kumar)
Sc. C
Telfax : +91-11-23230856
E-mail: registration@bis.gov.in

Note: This is a system generated letter. Hence signature is not required.
To verify authentication of letter, kindly scan the QR code on this letter.

PRODUCT LIST

❖ INDOOR LUMINARIES

PANEL LIGHT

DOWN LIGHTER

SURFACE LIGHT

❖ OUTDOOR LUMINARIES

STREET LIGHT

FLOOD LIGHT

❖ INDUSTRIAL LUMINARIES

HIGH BAY

❖ LAND SCAPE LUMINARIES

GATE LIGHT

BOLLARD

❖ BULK HEAD

ROUND PANEL LIGHT



Product Specifications

- Aluminium Housing with PC diffuser
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Nation star / Hongli
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGHT/WIDTH/DIA	Height	DIMENSION	
3watt	300LM	90	20 MM	75 DIA	
6watt	600LM	125	20 MM	110 DIA	
9watt	900LM	125	20 MM	110 DIA	
12watt	1200LM	175	20 MM	160 DIA	
15watt	1500LM	175	20 MM	160 DIA	
18watt	1800LM	225	20 MM	210 DIA	
22watt	2200LM	225	20 MM	210 DIA	


Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

SQUARE PANEL LIGHT



Product Specifications

- Aluminium Housing with PC diffuser
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Nation star / Hongli
- 2 Year Warranty

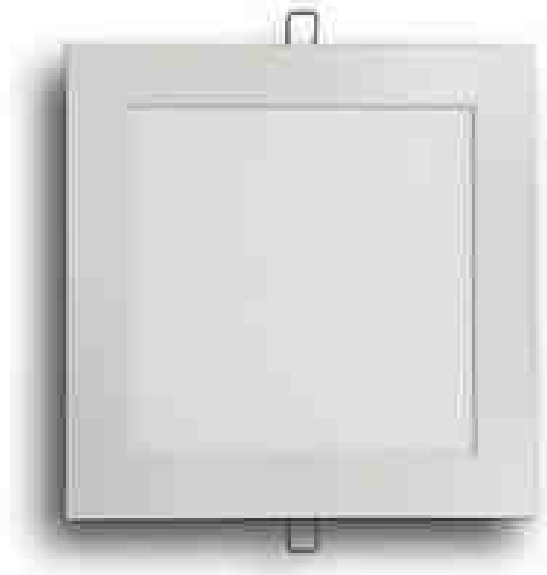

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGTH/WIDTH/DIA	Height	DIMENSION	
3watt	300LM	90	20 MM	75 X 75 SQ	
6watt	600LM	145	20 MM	110 X 110 SQ	
9watt	900LM	145	20 MM	110 X 110 SQ	
12watt	1200LM	175	20 MM	160 X 160 SQ	
15watt	1500LM	175	20 MM	160 X 160 SQ	
18watt	1800LM	225	20 MM	210 X 210 SQ	
22watt	2200LM	225	20 MM	210 X 210 SQ	
40watt	4000LM	580 X 580	45 MM	565 X 565 SQ	

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

PANEL BACKLIT BLAZE



Product Specifications

- Polycarbonate Housing with PC diffuser
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Nation star / Hongli
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGTH/WIDTH/DIA	Height	DIMENSION	
7watt	700LM	115	35 MM	80 SQ	
15watt	1500LM	180	40 MM	135 SQ	
22watt	2200LM	220	45 MM	175 SQ	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------


PANEL LIGHT CLASSIC

(SURFACE ROUND & SQUARE)



Product Specifications

- Aluminium Housing with PC diffuser
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Nation star / Hongli
- 2 Year Warranty

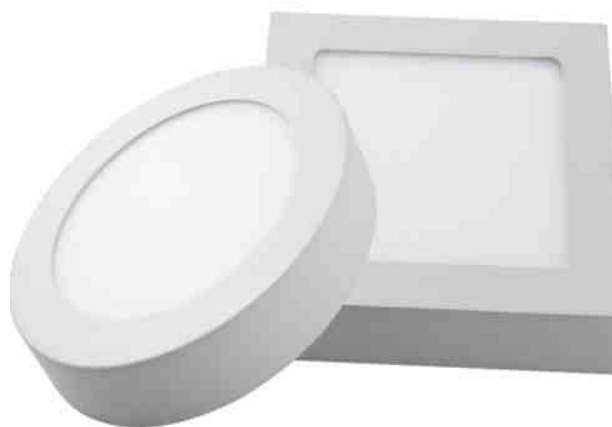

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		STD PACK	MRP
		LENGHT/WIDTH/DIA	Height		
15watt R	1500LM	120 DIA	42 MM		
22watt R	2200LM	170 DIA	42 MM		
15watt S	1500LM	120 X 120	42 MM		
22watt S	2200LM	170 X 170	42 MM		

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT JUNCTION BOX



Product Specifications

- Aluminium Housing with PC diffuser
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Nation star / Hongli
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGHT/WIDTH/DIA	Height	DIMENSION	
7watt	700LM	105	45 MM	75 MM	

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT DAZE



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- COB Used : Bridgelux
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGTH/WIDTH/DIA	Height	DIMENSION	
5watt	500LM	70	50 MM	50 MM	
10watt	1000LM	85	70 MM	65 MM	
15watt	1500LM	110	80 MM	90 MM	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT ORNETTE

(CONE & TILTABLE)



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- COB Used : Bridgelux
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGTH/WIDTH/DIA	Height	DIMENSION	
10watt CD	1000LM	100	105 MM	92 MM	
15watt CD	1500LM	100	105 MM	92 MM	
10watt TD	1000LM	108	105 MM	92 MM	
15watt TD	1500LM	108	105 MM	92 MM	

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT LASER



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Philips Lumiled
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGTH/WIDTH/DIA	Height	DIMENSION	
2watt	200LM	44 X 44	47 MM	38 X 38 SQ	
4watt	400LM	75 X 44	47 MM	70 X 38 SQ	
10watt	1000LM	147 X 44	47 MM	140 X 38 SQ	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT MARS



Product Specifications

- Polycarbonate Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Nation star / Hongli
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGTH/WIDTH/DIA	Height	DIMENSION	
3watt	300LM	55	40 MM	40 MM	
6watt	600LM	70	50 MM	55 MM	
9watt	900LM	100	70 MM	80 MM	


Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT SHINE



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- COB Used : Bridgelux
- 2 Year Warranty
- Also Tunable / Dimmable Option

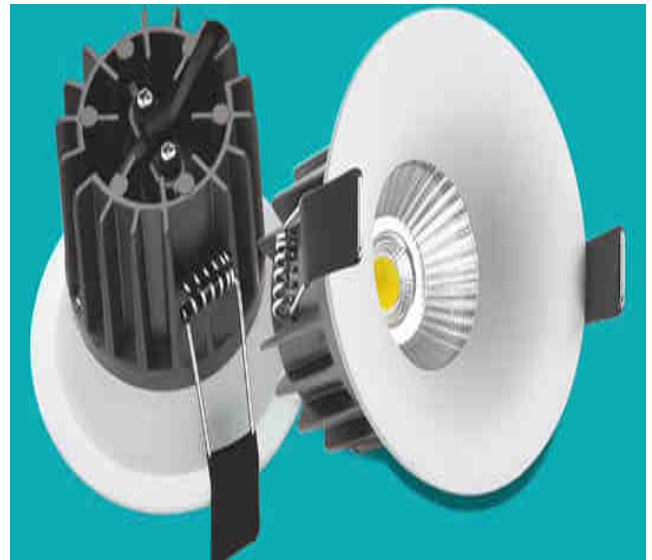

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)	Height	CUTOUT	MRP
		LENGHT/WIDTH/DIA		DIMENSION	
7watt	700LM	62	62 MM	53	
12watt	1200LM	70	75 MM	64	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT STORM



Product Specifications

- **Aluminium Housing**
- **Power Factor : >0 .95**
- **THD : <10%**
- **Input : 220-240VAC~50/60 Hz**
- **Operating Voltage Range 100-300VAC**
- **COB Used : Bridgelux**
- **2 Year Warranty**
- **Also Tunable / Dimmable Option**



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGHT/WIDTH/DIA	Height	DIMENSION	
3watt	300LM	65	30 MM	55	
6watt	600LM	80	25 MM	70	
9watt	900LM	70	30 MM	70	
12watt	1200LM	110	30 MM	90	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT TORNADO



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- COB Used : Bridgelux
- 2 Year Warranty
- Also Tunable / Dimmable Option



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGHT/WIDTH/DIA	Height	DIMENSION	
8watt	800LM	70	75 MM	70	
12watt	1200LM	80	95 MM	80	
15watt	1500LM	80	95 MM	80	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

DOWN LIGHT CONNECT



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- COB Used : Bridgelux
- 2 Year Warranty
- Also Tunable / Dimmable Option



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		CUTOUT	MRP
		LENGTH/WIDTH/DIA	Height	DIMENSION	
7watt	700LM	62	62 MM	53	
12watt	1200LM	70	75 MM	64	
15watt	1500LM	70	75 MM	64	

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

SUPER SURFAC CEILING LIGHT (ROUND DOWN LIGHT)



Product Specifications

- Polycarbonate Housing with PC diffuser
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Nation star / Hongli
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		STD PACK	MRP
		LENGTH/WIDTH/DIA	Height		
18watt	1800LM	150	45		
22watt	2000LM	200	45		

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

T5 BATTEN



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- Led Used : Nation star / Hongli
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension			STD PACK	MRP
		Length	Width			
5watt	500LM	1 ft	30			
10watt	1000LM	2 ft	30			
20watt	2000LM	4 ft	30			

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

STREET LIGHT INSTA OPTIC



Product Specifications

- Aluminium Housing with optical Lens
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		L	W			
20watt	2000LM	330	105	35 MM		
24watt	2400LM	330	105	35 MM		
30watt	3000LM	385	148	35 MM		
36watt	3600LM	385	148	35 MM		
50watt	5000LM	385	148	35 MM		

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011754



UDYAM-MH-18-0011448



STREET LIGHT HYBRO



Product Specification

- Aluminium Housing with Toughened Glass
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		L	W			
36watt	3600LM	425	142	35 MM		
50watt	5000LM	425	142	35 MM		
60watt	6000LM	530	190	55 MM		
90watt	9000LM	530	190	55 MM		
100watt	10000LM	530	190	55 MM		

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011754



UDYAM-MH-18-0011448



STREET LIGHT ECO+



Product Specification

- Aluminium Housing with Toughened Glass
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		L	W			
100watt	10000LM	520	260	50 MM		
150watt	15000LM	520	260	50 MM		
200watt	20000LM	610	325	57 MM		

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011754



UDYAM-MH-18-0011448



STREET LIGHT ARRAY



Product Specification

- Aluminium Housing with optical Lens
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: OSRAM
- 2 Year Warranty
-



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		L	W			
20watt	2400LM	305	107	35 MM		
24watt	2880LM	305	107	35MM		
30watt	3600LM	350	127	35 MM		
36watt	4320LM	350	127	35 MM		
50watt	6000LM	400	175	45 MM		
100watt	12000LM	640	220	55 MM		

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011754



UDYAM-MH-18-0011448



STREET LIGHT SKY



Product Specification

- Aluminium Housing with PC Diffuser
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		L	W			
25watt	2500LM	320	82	35 MM		
36watt	3600LM	320	82	35 MM		

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011754



UDYAM-MH-18-0011448



STREET LIGHT GLORIOUS DECORATIVE



Product Specification

- Aluminium Housing with PC Diffuser
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	STD PACK	MRP
24watt	2400LM		
36watt	3600LM		

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011754



UDYAM-MH-18-0011448



FLOOD LIGHT STAR



Product Specifications

- Aluminium Housing with Toughened Glass
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High ingress Protection
- LED Used : OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		STD PACK	MRP
		Length	Width		
10watt	1000LM	112	98	35	
20watt	2000LM	134	112	35	
30watt	3000LM	184	152	45	
50watt	5000LM	228	192	45	
100watt	10000LM	285	238	55	
150watt	15000LM	345	285	70	
200watt	20000LM	425	322	80	
300watt	30000LM	-	-	-	
400watt	40000LM	-	-	-	

Surge protection up to 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-----------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011711



UDYAM-MH-18-0011448



FLOOD LIGHT LENZA



Product Specifications

- Aluminium Housing with Optical Lens
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High ingress Protection
- LED Used : OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		STD PACK	MRP
		Length	Width		
30watt	3000LM	205	165		
50watt	5000LM	255	190		
100watt	10000LM	300	260		
150watt	15000LM	370	310		

Surge protection up 16KV	IP 65	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011711



UDYAM-MH-18-0011448



FLOOD LIGHT NEXA



Product Specifications

- Aluminium Housing with Toughened Gl
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High ingress Protection
- LED Used : OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		STD PACK	MRP
		Length	Width		
30watt	3000LM	180	125		
50watt	5000LM	250	170		
100watt	10000LM	350	240		

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011711



UDYAM-MH-18-0011448



FLOOD LIGHT THUNDER



Product Specifications

- Aluminium Housing with Polycarbonate diffuser
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High ingress Protection
- LED Used : OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		STD PACK	MRP
		Length	Width		
50watt	5000LM				
100watt	10000LM				
150watt	15000LM				

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011711



UDYAM-MH-18-0011448



FLOOD LIGHT PRESIDENT



Product Specifications

- Polycarbonate Housing with Aluminium Heat sink
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High ingress Protection
- LED Used : OSRAM
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)			STD PACK	MRP
		Length	Width	Height		
30watt	3000LM	166	157	62		
50watt	5000LM	230	200	78		
60watt	6000LM	230	200	78		
100watt	10000LM	290	287	100		
150watt	15000LM	290	287	100		

Surge protection up 16KV	IP 65	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011711



UDYAM-MH-18-0011448



FLOOD LIGHT BACK CHOKE MARIYO



Product Specifications

- Aluminium Housing with Toughened Glass
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High ingress Protection
- LED Used : OSRAM
- 2 Year Warranty
-



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)			STD PACK	MRP
		Length	Width	Height		
50watt	5000LM					
100watt	10000LM					
150watt	15000LM					
200watt	20000LM					
250watt	25000LM					
300watt	30000LM					
400watt	40000LM					

Surge protection up 16KV	IP 65	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------



R-71011711

UDYAM-MH-18-0011448

BEAM Highbay



Product Specifications

- Aluminium Housing with Toughened Glass
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High Ingress Protection
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGTH/WIDTH/DIA	Height	
50watt	5000LM	370	140	
100watt	10000LM	370	160	
150watt	15000LM	425	280	
200watt	20000LM	425	280	

Surge protection up 16KV	IP 64	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

PAN HIGHBAY



Product Specifications

- Aluminium Housing with Optical Lens
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High Ingress Protection
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGTH/WIDTH/DIA	Height	
50watt	5000LM	370	140	
100watt	10000LM	370	160	
150watt	15000LM	370	160	

Surge protection up 16KV	IP 64	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

UFO HIGHBAY



Product Specifications

- Aluminium Housing with Optical Lens
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- High Ingress Protection
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGHT/WIDTH/DIA	Height	
50watt	5000LM			
100watt	10000LM			
150watt	15000LM			

Surge protection up 16KV	IP 64	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT FREEDOM



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
20watt	2000LM	160	230	65 MM		

Surge protection up 16KV	IP 64	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT GLOBE



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
10watt	1000LM	175	235	50 MM		

Surge protection up 16KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT ANTIQUE MINI



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
10watt	1000LM	190	365	50 MM		

Surge protection up 16KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT ANTIQUE MAXI



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
10watt	1000LM	190	430	50 MM		

Surge protection up 16KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT LITES HOUSE



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
10watt	1000LM			50 MM		
30watt	3000LM			60 MM		

Surge protection up 16KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT MUSHROOM



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
10watt	1000LM			60 MM		
21watt	2100LM			60 MM		

Surge protection up 16KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT LANTERN



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Pole Mount

Surface Mount

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
20watt	2000LM	300	1200	60 MM		

Surge protection up 16KV	IP 64	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT CROMA



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
15watt	1500LM	160	230	45 MM		
24watt	2400LM	180	300	45 MM		

Surge protection up 16KV	IP 64	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT FANTA



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
50watt	5000LM			MM		

Surge protection up 16KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

GATE LIGHT DUNHILL



Product Specifications

- Polycarbonate Housing
- Power Factor: >0.95
- THD: < 10%
- Input: 220-240VAC~50/60Hz
- Operating Voltage Range 100-300 VAC
- High Ingress Protection
- LED Used: Hongli/Edison
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		PIPE ID	STD PACK	MRP
		Dia	Height			
20watt	2000LM	180	230	65 MM		

Surge protection up 16KV	IP 44	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

LED BOLLARD COBRA



Product Specifications

- Aluminium Housing
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (Inch)	MRP
		Height	
10watt BIG	910LM	30.0	
10watt MEDIUM	910LM	21.0	
10watt SMALL	910LM	16.0	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------

LED BOLLARD TRIANGLE



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (Inch) Height	MRP
10watt BIG	910LM	20	
10watt SMALL	910LM	15.5	

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------

LED BOLLARD (MARK I & MARK II)



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension	MRP
		Height	
10watt MARK BIG	910LM	22.0	
10watt MARK SMALL	910LM	15.0	
10watt MARK II BIG	910LM	22.0	
10watt MARK II SMALL	910LM	15.0	

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

LED BOLLARD TOWER



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (Inch)	MRP
		Height	
10watt BIG	910LM	25.5	
10watt SMALL	910LM	18.0	


Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

LED BOLLARD PILLAR



Product Specifications

- **Aluminium Housing**
- **Power Factor : >0.95**
- **THD : <10%**
- **Input : 220-240VAC~50/60 Hz**
- **Operating Voltage Range 100-300VAC**
- **LED Used : Osram LED**
- **2 Year Warranty**

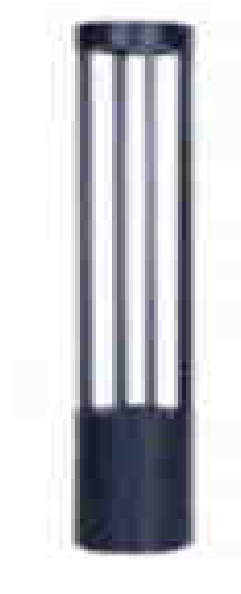

Specification

WATTAGE	Luminous flux	Overall Dimension	MRP
		Height	
10watt BIG	910LM	21.0	
10watt SMALL	910LM	18.0	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

LED BOLLARD BOTTEL



Product Specifications

- Aluminium Housing
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Osram LED
- 2 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension	MRP
		Height	
10watt	910LM	15.0	

Surge protection up 3KV	IP 20	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------

BULK HEAD OREO RANGE



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 1 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGHT/WIDTH	Height	
15watt	1500LM	230 X 100	70	

Surge protection up 3KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

BULK HEAD EON



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 3 in 1 with 3 step Driver
- 1 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGTH/WIDTH/DIA	Height	
10watt SINGLE COLOUR	1000LM	265 X 130	100 MM	
10W 3 IN 1 3000K TO 6500K WITH 3STEP DRIVER		265 X 130	100 MM	

Surge protection up 3KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

BULK HEAD AVANTE



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 3 in 1 with 3 step Driver
- 1 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGHT/WIDTH/DIA	Height	
10watt SINGLE COLOUR	1000LM	265 X 130	100 MM	
10W 3 IN 1 3000K TO 6500K WITH 3STEP DRIVER		265 X 130	100 MM	


Surge protection up 3KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

BULK HEAD CRETA



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 3 in 1 with 3 step Driver
- 1 Year Warranty

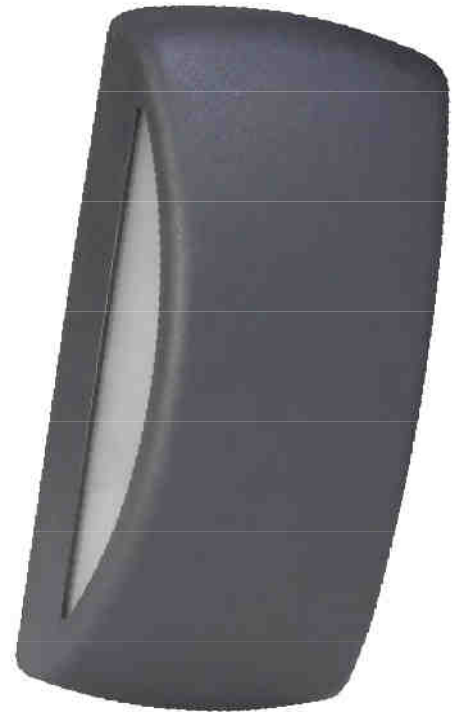

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGHT/WIDTH/DIA	Height	
10watt SINGLE COLOUR	1000LM	265 X 130	100 MM	
10W 3 IN 1 3000K TO 6500K WITH 3STEP DRIVER		265 X 130	100 MM	

Surge protection up 3KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

BULK HEAD ORA RANGE

ONE LINE | THREE LINE | FOUR LINE | SIX LINE



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 1 Year Warranty

Rectangle Bulkhead




One Line



Four Line



Three Line



Six Line

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGHT/WIDTH/DIA	Height	
10watt	1000LM	265 X 130	100 MM	


Surge protection up 16KV	IP 44	Lumens 100Lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------

BULK HEAD SQUARE



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 2 Year Warranty

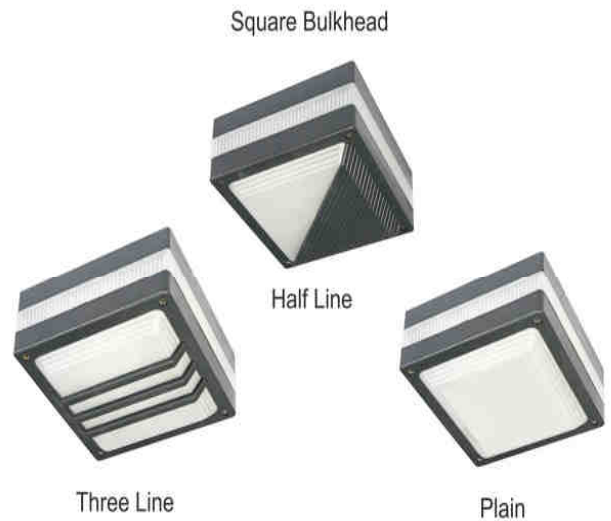

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGTH/WIDTH	Height	
10watt	1200LM	160 X 160	70	

Surge protection up 3KV	IP 44	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------	-------	-----------------------	-------	--------------	-------------------	--------------------	-------------------

BULK HEAD VIVO



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 1 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGTH/WIDTH	Height	
12watt	1200LM	255 X 128	85 MM	


Surge protection up 3KV	IP 44	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------

BULK HEAD NEXUS ROUND



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300vAC
- LED Used : Edison
- 1 Year Warranty

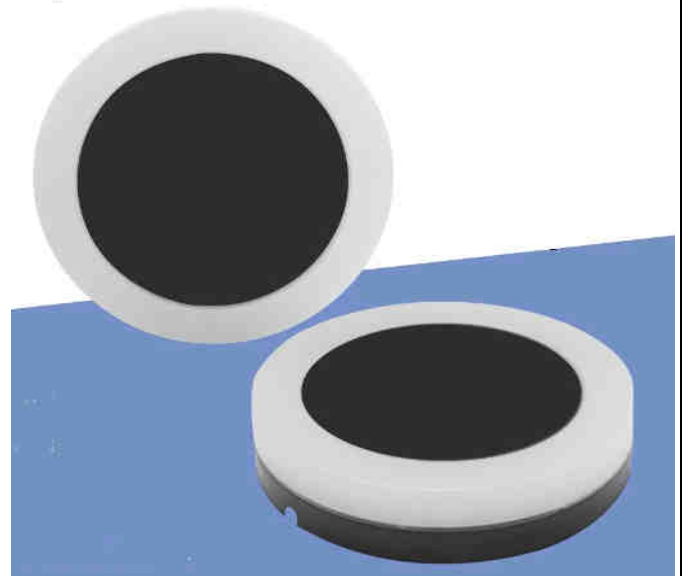

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGTH/WIDTH	Height	
18watt	1800LM	220	50 MM	


Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------

BULK HEAD NEXUS SQUARE



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0 .95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300vAC
- LED Used : Edison
- 1 Year Warranty

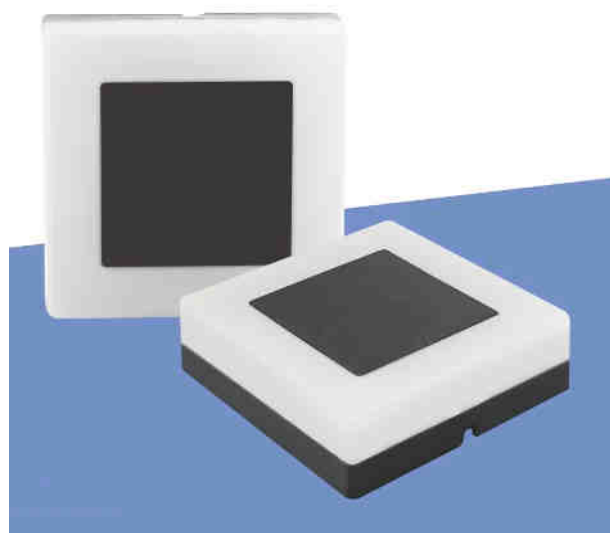

Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGHT/WIDTH	Height	
18watt	1800LM	165 X 165	50 MM	

Surge protection up 3KV	IP 20	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
-------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------

BULK HEAD CAPSUL



Product Specifications

- Polycarbonate Housing
- Non Isolated Driver
- Power Factor : >0.95
- THD : <10%
- Input : 220-240VAC~50/60 Hz
- Operating Voltage Range 100-300VAC
- LED Used : Edison
- 1 Year Warranty



Specification

WATTAGE	Luminous flux	Overall Dimension (IN MM)		MRP
		LENGTH/WIDTH	Height	
15watt	1500LM	82 X 38	20 MM	

Surge protection up 16KV	IP 64	Lumens 100lm per watt	NO UV	ECO FRIENDLY	80% ENERGY SAVING	50000 Hrs Lifetime	Easy Installation
--------------------------------	-------	-----------------------------	-------	-----------------	-------------------------	-----------------------	----------------------