

LEADING PROJECT
SUPPLIER & STOCKIST
OF ALL TYPES OF
ELECTRICAL GOODS



Chandan Electric Corporation
Since 1985



Office Add. 89, Princess Street, 2nd Flr., Peerbhoy Building, Pathak Wadi, Lohar Chawl, Mum-02.


Telephone 022 - 2208 7580 / 3956 7492 / 4003 9101 **Fax** 022 - 2201 9101

Mobile 91 - 9820486600 / 9029895008 **Website** www.chandanelectric.in

Email chandan_electric@hotmail.co.in / info.chandanelectric@gmail.com

WITH EFFECT FROM 15TH APRIL, 2021

Electrification products Price list (₹)

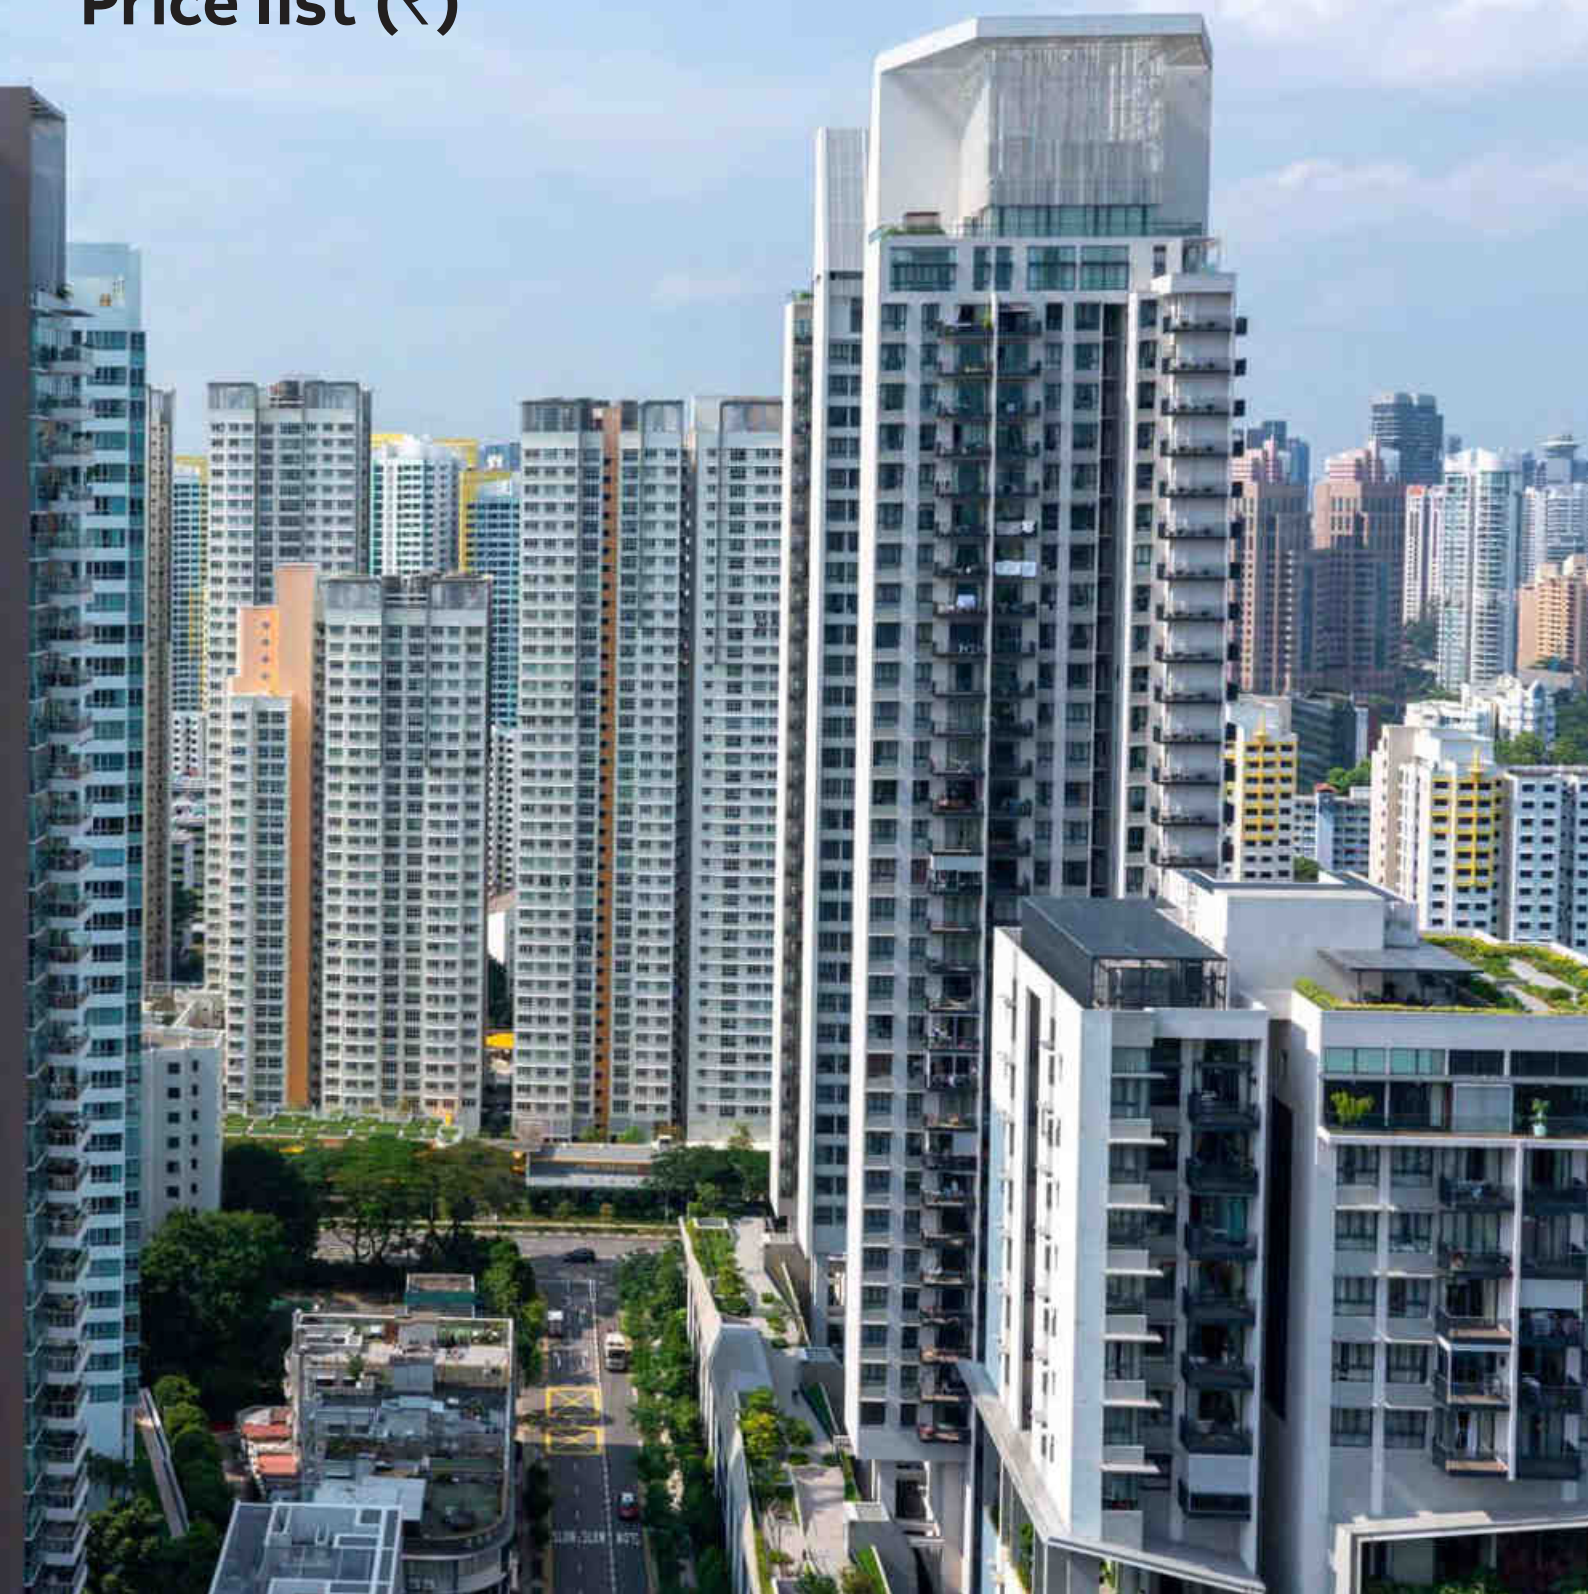

Electrification products

ABB is a global leader in power and automation technologies that enable utility and industry customers to improve performance while lowering environmental impact. ABB in India serves customers in process, manufacturing and consumer industries, utilities, the oil & gas sector and infrastructure markets through a wide manufacturing and marketing network.

ABB offers a full range of low-voltage and medium-voltage solutions to connect, protect, control and measure a wide range of electrical systems for all major industries, including the residential sector.

The business improves the reliability and efficiency of electrical installations through modular substation packages, distribution automation products, switchgear, circuit breakers, measuring and sensing devices, control products, wiring accessories, and enclosures and cabling

systems, including KNX systems designed to integrate and automate a building's lighting, ventilation, heating, security and data communication networks.

ABB's product range serves the diverse needs of customers, offering value-for-money and high levels of quality and reliability. These products are backed by the technological expertise of ABB's centres of excellence across the globe, each of which excel in a specific range of low voltage products.

ABB's electrification products offering in India are designed, manufactured and tested in-house in conformance with requirements of the ISO 9000 series. These products conform to the latest IEC standards, EN specifications, national standards such as IS, BS, VDE, etc., in addition to the "CE" mark.

Table of contents

Smart Power products

9-11	ABB Ability™ Energy and Asset Manager
12-14	Architecture Truly plug & play
15	ABB's comprehensive range of breakers and switches
16-17	Introduction SACE Emax 2
18-19	Introducing new SACE Tmax XT
20	ArTu. Born certified
21-22	Emax - Low voltage air circuit breakers
23	Tmax moulded case circuit breakers
24	Tmax circuit breakers
25-33	Tmax power distribution circuit breakers
34-38	Tmax motor protection circuit breakers
39	Tmax switch disconnectors
40-50	Tmax accessories
51-52	Tmax conversion kit
53	Tmax PV: Photovoltaic range moulded case switch disconnector
54-56	FORMULA DSA Moulded case circuit breaker
57	Switches
58-59	DC switch disconnectors for PV application
60	ONE20
61-62	Fusegear
63	Vertical Fuse Switch Disconnectors
64	OFAF HRC fuse links and base, DIN-type
65	OFF HRC fuse links and base, BS-type
66-68	OESA/OS switch disconnector fuse & accessories
69-72	OT switch disconnectors & accessories
73	Enclosed switches
74-75	Zenith Auto Transfer Switch
76-78	TruOne automatic transfer switches
79	Compact ATS
80	OT automatic transfer switches
81	OT manual changeover switches

82	OT motorized changeover switches
83	Accessories for changeovers (manual, motorized, ATS)
84	Kabeldon low voltage switchgear system
85	ABB's comprehensive range of LV control products
86	Motor starting and protection
87	Enhanced solutions
88-89	Advanced solutions
90	Complete solutions for control panels
91	Auxiliary contactors
92	3 pole contactors: AX09...AX370 : AC operated
93	3 pole contactors: AC operated
94	4 pole contactors: AC operated
95	3 pole contactors AL and TAL range: DC operated
96	Contactors for special application - capacitors switching
97	Contactors for DC circuit switching: AC/DC operated
98-99	Accessories for contactors
100	Contactors: Wide band AC/DC operated
101	3 pole contactors AF range: Wide band AC/DC operated
102	4 pole contactors: Wide band AC/DC operated
103	Accessories for AF contactors
104-105	AFC contactors for AC control applications
106	Accessories for AF contactors
107-110	ESB and EN Installation contactors
111	Mini contactors
112	Spares for contactors
113	DOL and star delta starters
114-118	Manual motor starter
119-121	Thermal overload relays
122	Electronic overload relays
123-124	Push-in Spring motor starting solution
125-129	Softstarters
130	AFS contactors with front-mounted auxiliary contact blocks

Table of contents

131-132	M mini contactors and contactor relays
133	Electronic compact starters: HF range
134-147	Pilot devices
148-150	Signal tower and beacons
151	Electronic products and relays
152-153	Time relays CT-C range
154	ABB CT-C Product Portfolio
155-161	Electronic products and relays
162-163	Smart temperature monitoring relay
164-165	Intelligent motor management system
166	Fieldbus interfaces
167	Ethernet interfaces
168	Adapter and accessories
169	Earth fault monitors, current transformers
170	Arc flash protection and mitigation solutions
171	Arc Guard System TVOC-2
172-185	ABB jakob safety
186-189	EV Charger
190	Terra AC wallbox
191	Terra AC wallbox benefits
192	Terra DC wallbox
193	Terra AC wallbox benefits
194	Terra 54 DC Fast Charger
195-196	Fast charging beyond 50 kW
197-198	ABB Heavy Commercial Vehicle charging
199	Pantograph up, Pantograph down
200-205	UPS

Smart Building products

206-209	Introduction - Electrical installation solutions for buildings
210-211	Miniature Circuit Breaker SB200 M - B characteristic
212-214	Miniature Circuit Breaker SB200 M - C characteristic
215-216	Miniature Circuit Breaker SB200 M - D characteristic
217-219	Miniature Circuit Breaker SB200 DC
221	Miniature Circuit Breaker S200 series - 80, 100A
222	High performance MCB S800 series 80 to 125A
223-225	Switch Disconnecter SDB200
226-228	RCCB FB200 and F200 Higher rating
230	RCBO - DS200M series
231	RCD blocks - DDA200 + S200 M series
232-234	Miniature Circuit Breaker S200M series
235-236	AP-R type (high immunity) RCCB / RCBO
237-251	System pro M
252-253	Surge protection devices
254-255	DBT Timer digital time switches
256-257	SMISLINE TP plug-in system
258	ELR, Earth leakage relay - (DIN & Front panel mountable)
259-273	Measurement devices
274-283	ABB ITUS enclosures
284-290	Elegance series enclosures
291-296	Classic series enclosures
297	Mistral IP 65 enclosures
298	Gemini switchboard
299-300	Millenium
301 -303	Zenit
304-317	IVIE - Wiring accessories
318-319	ABB Tvisha - Wiring accessories
320-322	ABB Tvisha (White) - Wiring accessories
323-324	Snieo - Wiring accessories
325-327	Busch-Presence detectors
328	Emergency lighting systems
329-332	Industrial plugs and sockets - Wiring accessories

Table of contents

Installation products

333	Installation products
334	Flexible conduit system
335-337	External lightning protection

Protection and Automation Relays

338	Section I: Auxiliary relays, tripping relays and timers
339-340	Section II: Electro-mechanical high speed tripping relays, bi-stable relays and static relays
341	Section III: Numerical protection and control relays
342	Section IV: Grid automation, FBT, arc protection, load shedding, engineering tools and miscellaneous items
343-346	Type 2 co-ordination
347	ABB low voltage air circuit breakers
348	Introduction
349	Service portfolio
350-352	Materials
353-355	Electrification India eMart
356-357	General conditions of sale

ABB Ability™

Energy and Asset Manager

Understanding power and assets

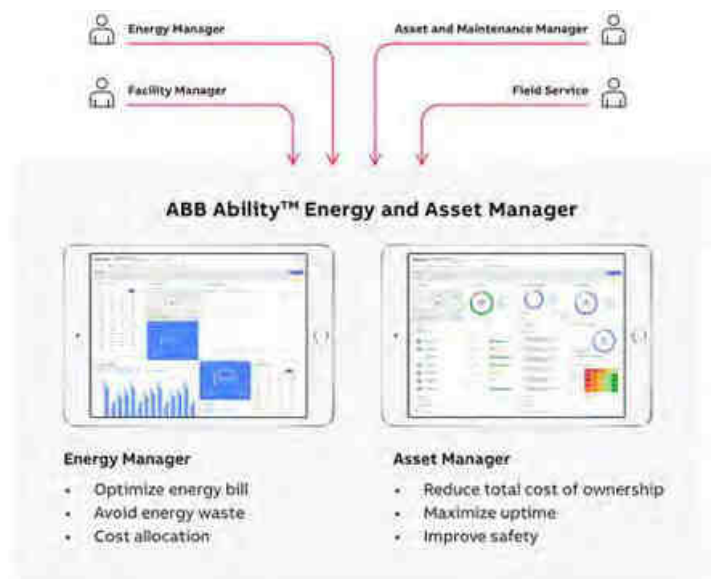


ABB Ability™

Energy and Asset Manager

Understanding power and assets

ABB Ability™ Energy and Asset Manager is a state-of-the-art cloud solution that integrates energy and asset management in a single intuitive dashboard. Providing full remote visibility of asset and electrical-system behavior, ABB Ability™ Energy and Asset Manager provides insights that help you minimize cost and risk and maximize performance and safety across your operations. Want to get started now? Testing and purchasing Energy and Asset Manager is easy on the ABB Ability Marketplace™.



Energy and Asset management made easy

The energy and asset management modules can be purchased separately or together, depending on your needs. Monitoring can also be segmented down to individual pieces of equipment and/or sub-systems-such as an elevator, a single HVAC system, or a production line.



ABB Ability™ Energy Manager

Energy efficiency has become essential to running cost-efficient operations. ABB Ability™ Energy Manager provides real-time understanding of your energy consumption and identifies areas of improvement. And it's scalable, from a single site to a multi-facility system with hundreds of users.



Monitor

Discover Site performance, supervise the electrical system and allocate costs.



Analyze

Schedule automatic data exports, improve the use of assets and take the right business decision.



Act

Set up alerts and notify to key personnel and remotely implement an effective efficiency strategy to achieve energy savings in a simple way.

ABB Ability™ Asset Manager



ABB Ability™ Asset Manager sets a new benchmark for simplicity and flexibility in asset-performance management. It gives you the power of seeing and optimizing your site equipment behavior anytime, anywhere via an intuitive graphic interface, resulting in greater reliability and availability and minimized unplanned maintenance.



Condition Monitoring

ABB Ability™ Asset Manager provides granular visibility of your asset behavior in real time for both LV and MV environments



Predictive Analytics

Detect potential faults through condition assessment, performance trends and pre-alarm notifications.



Maintenance Planning

Root-cause analysis of asset condition enables predictive maintenance that significantly reduces unplanned downtime and operational costs.

Lite panel One digital panel fits all



Lite Panel is the new switchboard HMI able to monitor and control until 28 electrical assets at the same time, directly connected in the on-premise communication network, showing their data as digital twins through predefined templates.

Value proposition



Safety

Monitoring and control the electrical assets, also with fault detections and diagnostics data check, far from the switchboard power sections reduce the risk of serious incidents.



Energy efficiency

Supervision of assets status, energy and power quality from a unique panel improves the data collection efficiency with less 70% of time spent nearby electrical rooms and enables analytics to plan saving actions.



Easy to install

The plug & play panel architecture saves more than 4 times the components and wirings compared to traditional market benchmarks.



Optimum interface

Until 28 digital-twin devices are available from a single interface within the local secure network, so leveraging on the already present communication tag points.


Architecture

Truly plug & play

Embedded solution with Ekip Com Hub

Emax 2, Ekip UP and TruONE equipped with the new Ekip Com Hub establishes the cloud connection for the whole switchboard.

This dedicated cartridge-type communication module just needs to be inserted into the terminal box and connected to the internet.

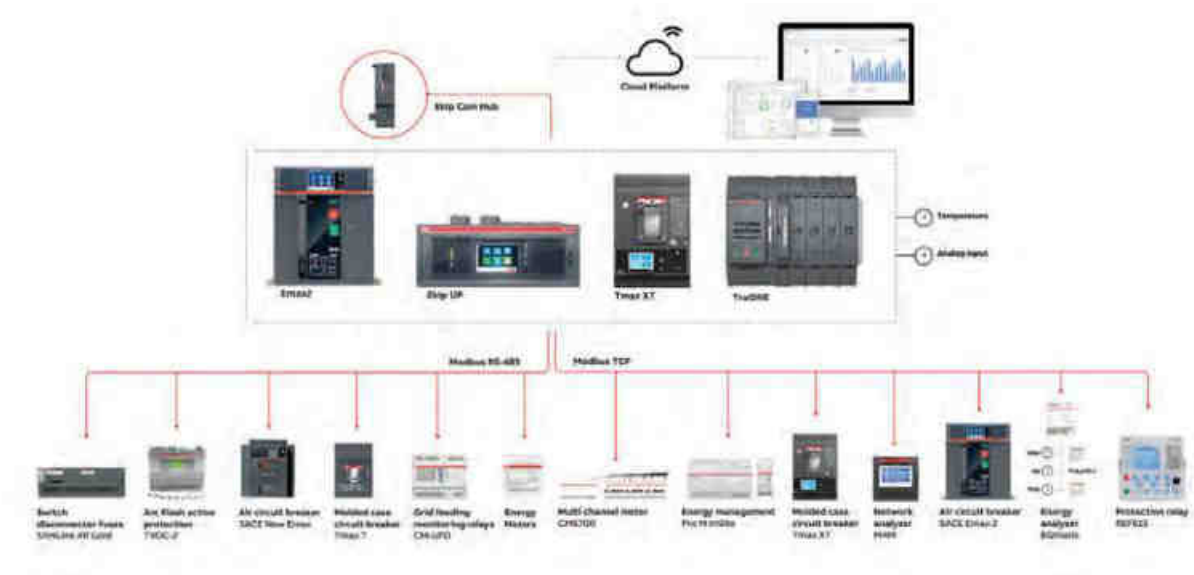

External solution with

ABB Ability™ Edge Industrial gateway

The ABB Ability™ Edge Industrial gateway module can be mounted on DIN rail to collect data throughout the system. You can also connect sensors to measure environmental parameters (temperature, water, gas) via both

analog and digital I/O. ABB Ability™ Edge Industrial gateway has enhanced connectivity functionalities, providing Wi-Fi or 3G/4G connectivity.

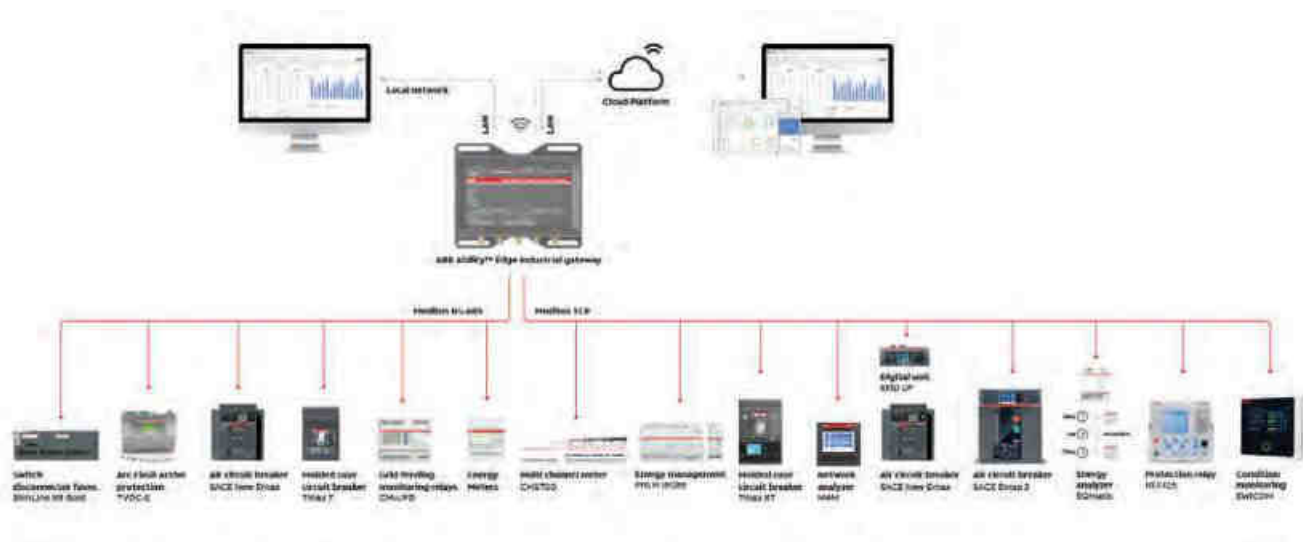


ABB showcases a further evolution in the low-voltage distribution business, establishing a new benchmark in terms of simplicity and performance.

ABB Ability™ Energy and Asset Manager enables the collection of relevant information from the ABB devices installed in the low-voltage power distribution system.

These devices can be connected to the cloud-computing platform to share data with Emax 2 (equipped with Ekip Com Hub) or with ABB Ability™ Edge Industrial gateway via Modbus RS-485, Modbus TCP and Ekip Link.

INFORMATION												COMMUNICATION
Family	Device	State	Current	Voltages	Power	Energy	Power factor	Power quality	Maintenance & Diagnostics	Load management	Analog or pulse/digital inputs	Protocol
Low voltage MCCB	Tmax XT	•	•	•	•	•	•	•	•	•	•	Modbus RS485, Modbus TCP, Ekip Com Hub
	Tmax T	•	•	•	•	•	•	•	•			Modbus RS485
Low voltage ACB	New Emax	•	•	•	•	•	•	•	•			Modbus RS485
	Emax 2	•	•	•	•	•	•	•	•	•	•	Modbus RS485, Modbus TCP, Ekip Com Hub
Digital units	Ekip UP	•	•	•	•	•	•	•		•	•	Modbus RS485, Modbus TCP, Ekip Com Hub
Low voltage switches and fusegear	TruONE ATS	•	•	•	•	•	•	•	•		•	Modbus RS485, Modbus TCP, Ekip Com Hub
	Slimline XR ITS 2.1	•	•	•	•	•	•	•	•			Modbus RS485
Digital inputs interface	Ekip signalling MODBUS TCP	•									•	Modbus TCP
Sub-Metering	EQ meters		•	•	•	•	•					Modbus RS485
Power meters	M4M		•	•	•	•	•	•				Modbus RS485, Modbus TCP
Energy management	System pro M compact® InSite	•	•	•	•	•	•	•		•	•	Modbus RS485, Modbus TCP
MV relays	615 Series	•	•	•	•	•	•	•	•	•	•	Modbus TCP
MV condition monitoring	SWICOM								•			Modbus TCP
And many others to come...		*Provided with dedicated accessories for communication and metering functions ** Only with ABB Ability Edge Industrial gateway										

ABB Ability™ Electrical Distribution Control System brings advantages to customers from the design to the operations stage.

The digital solution adds value to facilities, meeting customer demands and enabling them to comply with higher energy efficiency standards.

Real time analysis of valuable data from field devices enables customers to closely monitor the performance of multiple installations with a single supervision system.

Clear information about consumption and improvement opportunities makes cutting waste and improving energy efficiency simple. Customers also benefit from lower energy bills and reductions in unplanned downtime.

ABB's "plug and play" devices make installation quick and easy. Customers can make existing installations smart with no need to replace components. New and retrofitted solutions are up and running in no time, immediately starting to collect data.




Speed up your projects

- Increase the facility's value by 5%
- Reduce investment in supervision systems by 15%
- Achieve compliance or higher class of energy efficiency standards
- Faster payback



Easy to install

- Connect to the cloud in only 10 minutes
- Reduce cabling by 60% and connectivity components by 25%
- Upgrade in 1 day the existing installation
- Upgrade with zero component replacement and existing installation



Energy efficiency

- Save up to 20% on maintenance costs
- Save up to 20% on energy bill
- Get proactive alerts and guarantee operations in 1 minute
- Remove energy inefficiency by up to 10%



Global website for
ABB Ability™ EDCS



ABB's comprehensive range of breakers and switches

The range of ABB breakers and switches ranks amongst the most extensive on the market with a full range of innovative solutions for various applications, helping to optimise resources, reduce energy costs, boost productivity.

- Moulded case circuit breakers
- Air circuit breakers
- HRC fuse & fuse base
- Switch disconnecter fuse
- Switch disconnectors
- Changeover switches - manual & motorized
- Auto transfer switches
- Cam switches
- Cable distribution cabinet - Kabeldon
- Fuse gear - easyline and inline (Fuse switch disconnecter)
- Switch disconnecter for DC and photovoltaic application
- MCCB for DC and photovoltaic application



Introduction SACE Emax 2

The all-in-one innovation



—

The world of electrical power distribution changes fast and major new trends such as renewables, energy storage and microgrids are now crowding onto the stage. These trends lead to new customer and application demands.

To meet these demands, ABB has now unveiled the innovative Emax 2 all-in-one, the evolution of the Emax 2 into a multifunctional platform that is able to manage the next generation of electrical distribution systems such as microgrids.

Emax 2 all-in-one is the first circuit breaker that meets new grid requirements. It enables

a direct communication to the new energy management cloud-computing platform ABB Ability™ Electrical Distribution Control System.

Smart plug and play architecture makes Emax 2 all-in-one easy to use. Leveraging also unmatched electrical performances, Emax 2 sets a new circuit breaker benchmark for the needs of today and tomorrow.

SACE Emax 2, the all-in-one solution to manage "low-voltage distribution systems".

Efficiency and control

The power needed, when needed

Efficiency

Achieving maximum efficiency of an electrical installation requires intelligent management of power supplies and energy use. For this reason, the new technologies used in the SACE Emax 2 circuit breakers allow the productivity and reliability of installations to be optimized, and at the same time, power consumption to be reduced while fully respecting the environment.

New advanced functionalities, together with Protection trip units, Communication and system devices contribute to make SACE Emax 2 the circuit breaker that maximizes efficiency in all low-voltage electrical installation.

Control

SACE Emax 2 circuit breaker is the first single device ready to manage all the dynamics of a low-voltage electrical installation.

Managing loads in any condition is now possible thanks to Advanced Functionalities such as:

- **Adaptive load shedding.**
Fast load shedding to guarantee continuity for critical loads during black-outs. Typical scenario is when LV distribution is disconnected from the grid (MV).
- **Predictive load shedding.**
Slow load shedding to avoid overloads, giving the possibility to modulate loads consumption.

- **Power controller.**
Patented algorithm to reduce the peak of power consumed, allowing savings on electricity bills. Managing different power sources and connecting them to main grid is also crucial, so that service continuity is maximized.
- **Embedded ATS functions.**
An automatic transfer switch system used in all application where continuity is essential and where there are multi source supplies.
- **Synchro-reclosing.**
Synchronization and automatic reconnection of the Microgrid to the main grid when the power is back. Emax 2 is able to act as a controller of Main grid condition, disconnecting a plant when necessary and also to adapt protection to on-grid or off-grid conditions.
- **Interface protection system and Interface Device.**
Check of grid-connected operation that shall be immediately and automatically interrupted in case of outage of the distribution grid or when the voltage and frequency values of the grid itself are out of the range of values defined by the Distribution System Operator (DSO).
- **Adaptive protection.**
Network changes recognition and automatic set of thresholds to guarantee protection and coordination in on-grid and off-grid conditions.

MOULDED CASE CIRCUIT-BREAKERS

SACE Tmax XT

Break new ground



SACE Tmax XT overview

Break new ground

Break new ground simply means delivering value through the entire customer journey by leaving behind the traditional concept of circuit - breaker. The SACE Tmax XT range offers a unique customer experience that, sharing the same features and logics with the Emax 2 range, for the first time ever overcomes the differences between molded case and air circuit-breakers. The most advanced products designed to maximize data and connectivity, ease of use and installation, performance and protection, safety and reliability.

The SACE Tmax XT range offers higher performance, better protection and more precise metering than equivalent units, and can handle from 160 up to 1600A.

Combined with the world's most precise electronic trip units in the smallest frames, the new range delivers significant time savings and enhances installation quality.

Reliability is further increased, and speed of installation reduced, thanks to Bluetooth and Ekip connectivity for mobile devices.

The SACE Tmax XT family's built-in connectivity links smartphones, tablets and PCs to data analysis tools on the ABB Ability™ cloud platform in real time. The extreme precision of the data measured means users have access to accurate information anywhere and anytime, making it easier to monitor resources and identify savings opportunities.

Using the embedded smart power controller can help reduce energy consumption by up to 20 percent. Upgrading the breakers is straightforward: for the first time, customers can download new functions from the ABB Ability Marketplace™, choosing from among more than 50 different protection, metering and automation functionalities.



Distinctive features

Data and connectivity

Plant management of the future – SACE Tmax XT sets standards in modern plant and energy management. Access, monitor and control information remotely, anywhere, at any time. Improving efficiency and saving energy. The SACE Tmax XT is the first molded case circuit-breaker to become an active element inside the electrical plant without using external accessories.

Local connection and Remote communication

Commissioning and device setting have never been so easy thanks to the Bluetooth connectivity and the Ekip Connect software. All the data of the electrical plant are accessible and the interaction with the breakers from remote is straightforward thanks the several communication protocols available.

Cloud connectivity

Cloud connection is now possible to exploit the full service of ABB Ability™ EDCS thanks to the Ekip Com HUB.

Ease of use and installation

Maximum flexibility for every application – SACE Tmax XT sets standards for electrical installations. Easy selection, one-fits-all accessories and intuitive design pave the way for fast upgrades and create values through the entire customer journey. Even for the most critical projects.

Performance and protection

Continuity of service and equipment protection – SACE Tmax XT sets standards when extreme breaking capacity is needed. Sharing the same logics, interfaces and features regardless of operating voltage environmental conditions. Embedding the most advanced protections into the smallest of frames.

Electrical performances

SACE Tmax XT is designed and tested to meet any installation requirement, even the most critical ones.

Metering

SACE Tmax XT provides all the tools needed to set up a competent and effective energy management strategy thanks to the trip units able to measure electrical parameters with 1% accuracy certification.

Protections and logics

SACE Tmax XT integrates extra functionalities into the size of a standard molded case circuit-breaker. The most advanced protection functions and logics are available thanks to its cutting-edge trip units.

Safety and reliability

Absolute attention to detail, with style from design to manufacturing SACE Tmax XT sets standards for edge technologies. Half a century of research and experience means top-level products that are ready to face future challenges.

ArTu. Born certified

Fully checked and certified (IEC 60439-1 and IEC 61439-1 and 2 Standard) by an external independent organisation (Acea Lovag, CPRI & ERDA), the ArTu switchgear is a synonym of safety and quality. The certification is the fruit of severe tests carried out on the whole configuration, consisting of metalwork structures, circuit-breakers and busbar system.

The ArTu K series switchgear is ideal for primary distribution board, motor control center, power control center etc. upto 6300A with air and moulded-case circuit-breakers and any internal segregations up to Form 4, and for floor-mounted secondary distribution switchgear with moulded-case and modular circuit-breakers. The switchgear has been tested for Internal Arc (as per IEC 61641) and Seismic (as per IEC 60068).



The ArTu switchgear is noted for the following features:

- Integrated range of modular metalwork structures up to 6300 A with common accessories.
- Possibility of fulfilling all application requirements in terms of installation (floorstanding, modular and corner versions) and degree of protection (IP31, IP41, IP 42, IP54 & IP65).
- Maximum integration with modular apparatus and the moulded-case and air circuit-breakers, so that additional drilling or adaptations are not required.
- Minimum switchgear assembly time, thanks to the simplicity of the kits, standardization of the small assembly items, self-supporting elements and the presence of clear reference points for assembly of the plates and panels – Segregations in kits up to Form 4.

The use and installation of the kits according to the instructions provided means that assembly and cabling times can be reduced to a minimum, for example, thanks to the reference points for positioning the panels and plates, and that respect of the insulation distances and the rated characteristics of the circuit-breakers are guaranteed.

Emax - Low voltage air circuit breakers

- CT (Rogowski coil) range of 400 - 6300A (E1, E2, E3, E4 and E6) with breaking capacity range of 42-150KA
- Configured breakers are now available in E1, E2 and E3 frames
- SACE Emax circuit-breakers and their accessories conform to the international IEC 60947, EN 60947 CEI EN 60947 and IEC 61000 standards and comply with following EC directives "Low Voltage Directive" (LVD) no 73/23 EEC
- "Electromagnetic Compatibility Directive" (EMC) nr. 89/336 EEC
- Complete range of common accessories
- Double insulation
- Same height and depth for the whole range
- Protection releases provide complete set of standard protection function, advanced protection functions, measurement functions
- Optional modules (measurements, signalling, communication, wireless com) to upgrade the protection releases
- Neutral protection from OFF to 200%
- Interchangeability of releases
- Low voltage switch disconnectors upto 6300 amps and automatic circuit breakers upto 5000 amps in 1000V DC

Note : Prices on request



Extremely Simple Installation



Completely re-engineered protection releases



Fully Modular construction

Emax - Low voltage air circuit breakers

Configured breaker		Pole	PR121 LI	PR121 LSIG	PR122 LSIG
Frame	Rating				
E1 - 50KA -Withdrawable moving part - WMP	800A Manual	3P	1SDA055712R1	1SDA055714R1	1SDA055717R1
	1000A Manual		1SDA059214R1	1SDA059222R1	1SDA059234R1
	1250A Manual		1SDA055744R1	1SDA055746R1	1SDA055749R1
	1600A Manual		1SDA055776R1	1SDA055778R1	1SDA055781R1
E2 - 65KA -Withdrawable moving part - WMP	2000A Manual		1SDA055936R1	1SDA055938R1	1SDA055941R1
E3 - 65KA -Withdrawable moving part - WMP	2500A Manual		1SDA056128R1	1SDA056130R1	1SDA056133R1
	3200A Manual		1SDA056160R1	1SDA056162R1	1SDA056165R1
E4 - 75KA -Withdrawable moving part - WMP	4000A Manual		1SDA056800R1	1SDA056802R1	1SDA056805R1
E1 - Withdrawable fixed part - WFP - HR-HR	FIXED PART WFP HR-HR	3P	1SDA059666R1 ■		
E2 - Withdrawable fixed part - WFP - HR-HR			1SDA059667R1 ■		
E3 - Withdrawable fixed part - WFP - HR-HR			1SDA059669R1 ■		
E4 - Withdrawable fixed part - WFP - HR-HR			1SDA059670R1 ■		
E1 - 50KA -Withdrawable moving part - WMP	800A Manual	4P	1SDA055720R1	1SDA055722R1	1SDA055725R1
	1000A Manual		1SDA059216R1	1SDA059224R1	1SDA059236R1
	1250A Manual		1SDA055752R1	1SDA055754R1	1SDA055757R1
	1600A Manual		1SDA055784R1	1SDA055786R1	1SDA055789R1
E2S - 65KA -Withdrawable moving part - WMP	2000A Manual		1SDA055944R1	1SDA055946R1	1SDA055949R1
E3 - 65KA -Withdrawable moving part - WMP	2500A Manual		1SDA056136R1	1SDA056138R1	1SDA056141R1
	3200A Manual		1SDA056168R1	1SDA056170R1	1SDA056173R1
E4 - 75KA -Withdrawable moving part - WMP	4000A Manual		1SDA056808R1	1SDA056810R1	1SDA056813R1
E1 - Withdrawable fixed part - WFP - HR-HR	FIXED PART WFP HR-HR	4P	1SDA059762R1 ■		
E2 - Withdrawable fixed part - WFP - HR-HR			1SDA059763R1 ■		
E2S - Withdrawable fixed part - WFP - HR-HR			1SDA059764R1 ■		
E3 - Withdrawable fixed part - WFP - HR-HR			1SDA059765R1 ■		
E4 - Withdrawable fixed part - WFP - HR-HR			1SDA059766R1 ■		

* All the configured breaker will have accessories fitted from the factory

Note:

1. Withdrawable fixed parts (WFP) and withdrawable moving parts (WMP) are to be ordered together for a draw out complete breaker.
2. To convert the breaker from manual operated (MDO or MF) to electrical operated (EDO or EF), order MDO/EDO conversion kit which comprises closing coil, opening coil and motor operator. Suitable operating voltage for the conversion kit has to be mentioned.
3. For other current rating and breaking capacity, ACB requirement, contact our nearest sales office.

Tmax moulded case circuit breakers

Tmax moulded-case circuit-breakers guarantee an extremely high performance level while being progressively smaller in size, simple to install and able to provide increasingly better safety guarantees for the operator. In addition to being ideal for the secondary distribution of alternate and direct current, they feature dedicated solutions for all application requirements.

Moulded-case circuit-breakers can be used in low voltage civil and industrial installations with 1 to 3200 A operating current. The Tmax family includes 9 circuit-breaker sizes in three- or four-pole versions:

- XT1, XT2, XT3 and XT4 up to 250A;
- T4, T5 and T6 up to 1000A;
- T7 and T8 up to 3200A.

The ultimate short-circuit breaking capacity (Icu) at 415V ranges from 18kA to 200kA, or up to 100kA for 690V. The following ranges are available:

- Circuit-breakers for AC and DC power distribution;
- Circuit-breakers for zone selectivity;
- Circuit-breakers for motor protection;
- Circuit-breakers for application up to 1150V AC and 1500V DC;
- Switch-disconnectors.

Tmax circuit-breakers can be equipped with thermomagnetic, magnetic only or electronic trip units; all of which are interchangeable. Since assembly instructions are simple, trip units can quickly and easily be replaced; even in the field. All this makes the circuit-breakers very easy to operate with considerable savings due to rationalized stock management.

All Tmax circuit breakers can be enhanced with a vast range of standardized accessories. This convenience not only cuts down on inventory, but creates an extremely flexible and easily managed solution.



Tmax circuit breakers

Type	Iu (40° C) [A]	Ue [V]		Category	Release	Icu (380 - 415 V AC) [kA]									
		AC	DC			16	25	36	50	70	85	100	120	150	200
XT1	160	690	500	A	TMD/TMF MF/MA	B	C	N	S	H					
XT2	160	690	500	A	TMD/TMA MF/MA Ekip LS/I Ekip I Ekip LSI Ekip LIG Ekip LSIG Ekip M-I Ekip M-LIU Ekip M-LRIU Ekip N-LS/I			N	S	H		L	V		
XT3	250	690	500	A	MF/MA TMD TMG			N	S						
XT4	250	690	500	A	TMD/TMA MF/MA Ekip LS/I Ekip I Ekip LSI Ekip LIG Ekip LSIG Ekip E-LSIG Ekip M-LIU Ekip M-LRIU Ekip G-LS/I Ekip N-LS/I			N	S	H		L	V		
T5	400 630	690 1150	750 1000	B (400 A) A (630 A)	TMA (500 A) TMG (500 A) PR221DS PR222DS Ekip M			N	S	H		L		V	
T6	630 800 1000	690 1150	750 1000	B (630A - 800 A) A (1000 A)	TMA (800 A) PR221DS PR222DS Ekip M			N	S	H		L		V	
T7	800 1000 1250 1600	690		B	PR231/P PR232/P PR331/ P PR332/P				S	H		L	V		

Trip Units

Thermal magnetic trip units

- MA - Magnetic only trip unit with adjustable magnetic thresholds for motor protection
- TMF - Fixed thermal and fixed magnetic for power distribution
- TMD - Adjustable thermal (70-100% of In) and fixed magnetic (10 x In) for power distribution
- TMA - Adjustable thermal (70-100% of In) and adjustable magnetic (5-10 of In) for power distribution
- TMG - Adjustable thermal (70-100% of In) and low fixed magnetic (3 x In) for generator protection

Microprocessor based electronic trip units

Ekip LS/I or Ekip LSI	L = 0.40 - 1 of In S = 1 - 10 of In I = 1 - 10 of In	Ekip LIG New	L = 0.40 - 1 of In I = 1 - 10 of In G = 0.2 - 1 of In	Ekip LSIG or Ekip E-LSIG	L = 0.4 - 1 of In S = 0.6 - 10 of In I = 1.5 - 12 of In G = 0.2 - 1 of In	Ekip M-LIU	L = 0.4 - 1 of In I = 6 - 13 of In U* = ON or OFF	Ekip M-LRIU	L = 0.4 - 1 of In R = 3 - 9 of In I = 6 - 13 of In G = 0.2 - 1 of In U* = ON or OFF
PR221	L = 0.40 - 1 of In S = 1 - 10 of In I = 1 - 10 of In	PR222	L = 0.4 - 1 of In S = 0.6 - 10 of In I = 1.5 - 12 of In G = 0.2 - 1 of In	PR231	L = 0.4 - 1 of In S = 1 - 10 of In I = 1 - 12 of In	PR331	L = 0.4 - 1 of In S = 0.6 - 10 of In I = 1.5 - 15 of In G = 0.2 - 1 of In		

L = Overload S = Short circuit I = Instantaneous short circuit G = Earth fault

U = phase loss (U): With selector in ON position, circuit breaker trips if at least one current phase is lower than 0.1xIn and at least a second one higher than 0.25xIn;

Ekip N-LS/I : Neutral can be set in the OFF or ON positions, at 100% or at 160% of the phases;

Ekip G-LS/I : Neutral, in four-pole circuit-breakers, can be set in the OFF, ON positions at 50% or 100% of the phases;

Note: For detailed information about trip units, refer technical catalogue.

Tmax power distribution circuit breakers

XT1



Breaking capacity at 415VAC

	Icu	Ics (Icu)
B	18kA	100%
C	25kA	100%
N	36kA	100%

TMD			B		C		N	
Frame	In (A)	Poles	Ordering code	L.P.(₹)	Ordering code	L.P.(₹)	Ordering code	L.P.(₹)
XT1 160	16	3	1SDA066799R1	7,750	1SDA080825R1 *	8,310	1SDA080827R1 *	11,160
	20		1SDA066800R1		1SDA080826R1 *		1SDA080828R1 *	
	25		1SDA066801R1		1SDA067391R1		1SDA080829R1	
	32		1SDA066802R1		1SDA067392R1		1SDA067411R1	
	40		1SDA066803R1 ■		1SDA067393R1 ■		1SDA067412R1 ■	
	50		1SDA066804R1 ■		1SDA067394R1 ■		1SDA067413R1 ■	
	63		1SDA066805R1 ■		1SDA067395R1 ■		1SDA067414R1 ■	
	80		1SDA066806R1 ■		1SDA067396R1 ■		1SDA067415R1 ■	
	100		1SDA066807R1 ■		1SDA067397R1 ■		1SDA067416R1 ■	
	125		1SDA066808R1 ■	10,840	1SDA067398R1 ■	12,640	1SDA067417R1 ■	12,830
	160		1SDA066809R1 ■	12,400	1SDA067399R1 ■	16,240	1SDA067418R1 ■	16,990
	16	4	1SDA066810R1	10,590	1SDA080840R1 *	11,920	1SDA080842R1 *	14,020
	20		1SDA066811R1		1SDA080841R1 *		1SDA080843R1 *	
	25		1SDA066812R1		1SDA067400R1		1SDA080844R1 ■	
	32		1SDA066813R1 ■		1SDA067401R1 ■		1SDA067419R1 ■	
	40		1SDA066814R1 ■		1SDA067402R1 ■		1SDA067420R1 ■	
	50		1SDA066815R1		1SDA067403R1 ■		1SDA067421R1	
	63		1SDA066816R1 ■		1SDA067404R1 ■		1SDA067422R1 ■	
	80		1SDA066817R1 ■		1SDA067405R1 ■		1SDA067423R1 ■	
	100		1SDA066818R1 ■		1SDA067406R1 ■		1SDA067424R1 ■	
	125		1SDA066888R1 ■	13,340	1SDA067409R1 ■	14,990	1SDA067427R1 ■	16,410
	160		1SDA066821R1 ■	16,930	1SDA067410R1 ■	19,330	1SDA067428R1 ■	20,570

*TMF trip unit

■ Stock items

Tmax power distribution circuit breakers

XT1



Breaking capacity at 415VAC

	Icu	Ics (Icu)
S	50kA	75%
H	70kA	50%

TMD / TMF*

Frame	In (A)	Poles
XT1 160	16	3
	20	
	25	
	32	
	40	
	50	
	63	
	80	
	100	
	125	
	160	
	16	4
	20	
	25	
	32	
	40	
	50	
	63	
	80	
	100	
	125	
	160	

S

Ordering code	L.P.(₹)
1SDA080830R1*	11,840
1SDA080831R1*	
1SDA080832R1	
1SDA080833R1 ■	
1SDA080834R1 ■	
1SDA067431R1	
1SDA067432R1 ■	
1SDA067433R1 ■	
1SDA067434R1 ■	
1SDA067435R1 ■	
1SDA067436R1 ■	18,740
1SDA080845R1*	17,010
1SDA080846R1*	
1SDA080847R1	
1SDA080848R1	
1SDA080849R1	
1SDA067439R1	
1SDA067440R1 ■	
1SDA067441R1	
1SDA067442R1 ■	
1SDA067445R1 ■	
1SDA067446R1	22,170

H

Ordering code	L.P.(₹)
1SDA080835R1*	14,200
1SDA080836R1*	
1SDA080837R1	
1SDA080838R1	
1SDA080839R1	
1SDA067449R1	
1SDA067450R1	
1SDA067451R1	
1SDA067452R1	
1SDA067453R1	
1SDA067454R1	23,380
1SDA080850R1*	19,360
1SDA080851R1*	
1SDA080852R1	
1SDA080853R1	
1SDA080854R1	
1SDA067457R1	
1SDA067458R1	
1SDA067459R1	
1SDA067460R1	
1SDA067463R1	
1SDA067464R1	24,520

*TMF trip unit

XT3

Breaking capacity at 415VAC

	Icu	Ics(Icu)
N	36kA	75%
S	50kA	50%

TMD

Frame	In (A)	Poles
XT3 250	200	3
	250	
	200	4
	250	

N

Ordering code	L.P.(₹)
1SDA068058R1 ■	21,250
1SDA068059R1 ■	24,670
1SDA068069R1 ■	22,510
1SDA068070R1 ■	26,870

S

Ordering code	L.P.(₹)
1SDA068220R1 ■	22,650
1SDA068221R1 ■	26,170
1SDA068231R1 ■	27,320
1SDA068232R1 ■	29,990

■ Stock items

Tmax power distribution circuit breakers

Protection: TMD/TMA

XT2/XT4/T5/T6



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36kA	100%
S	50kA	100%
H	70kA	100%



TMD / TMA*

TMD / TMA*			N		S		H	
Frame	In (A)	Poles	Ordering code	L.P.(₹)	Ordering code	L.P.(₹)	Ordering code	L.P.(₹)
XT2160	1.6	3	1SDA067000R1	14,150	1SDA067540R1	15,660	1SDA067584R1	21,250
	2		1SDA067001R1		1SDA067541R1		1SDA067585R1	
	2.5		1SDA067002R1		1SDA067542R1		1SDA067586R1	
	3.2		1SDA067003R1		1SDA067543R1		1SDA067587R1	
	4		1SDA067004R1		1SDA067544R1		1SDA067588R1	
	5		1SDA067005R1		1SDA067545R1		1SDA067589R1	
	6.3		1SDA067006R1		1SDA067546R1		1SDA067590R1	
	8		1SDA067007R1		1SDA067547R1		1SDA067591R1	
	10		1SDA067008R1		1SDA067548R1 ■		1SDA067592R1	
	12.5		1SDA067009R1	1SDA067549R1	1SDA067593R1			
	16		1SDA067010R1 ■	1SDA067550R1 ■	1SDA067594R1			
	20		1SDA067011R1 ■	1SDA067551R1	1SDA067595R1			
	25		1SDA067012R1	1SDA067552R1 ■	1SDA067596R1			
	32		1SDA067013R1 ■	1SDA067553R1 ■	1SDA067597R1			
	40		1SDA067014R1 ■	1SDA067554R1 ■	1SDA067598R1			
	50		1SDA067015R1	1SDA067555R1 ■	1SDA067599R1			
63	1SDA067016R1 ■	1SDA067556R1 ■	1SDA067600R1 ■					
80	1SDA067017R1	1SDA067557R1 ■	1SDA067601R1					
100	1SDA067018R1 ■	1SDA067558R1 ■	1SDA067602R1 ■					
125	1SDA067019R1 ■	16,670	1SDA067559R1 ■	18,780	1SDA067603R1 ■	35,920		
160	1SDA067020R1 ■	20,250	1SDA067560R1 ■	22,850	1SDA067604R1	36,300		
XT4 250	200	1SDA068090R1 ■	23,090	1SDA068310R1 ■	25,860	1SDA068343R1	41,260	
	225	1SDA068091R1	25,800	1SDA068311R1	26,800	1SDA068344R1	41,360	
	250	1SDA068092R1 ■	26,450	1SDA068312R1 ■	27,660	1SDA068345R1 ■	41,660	
	320	1SDA054436R1 ■	31,560	1SDA054440R1 ■	34,570	1SDA054444R1 ■	43,240	
400	1SDA054437R1 ■	1SDA054441R1 ■		1SDA054445R1 ■				
500	1SDA054456R1 ■	39,500		1SDA054461R1 ■		44,170		1SDA054465R1
T6	630	1SDA060202R1 ■	46,810	1SDA060204R1 ■	48,130	1SDA060206R1	57,640	
	800	1SDA060214R1 ■	60,290	1SDA060216R1 ■	63,140	1SDA060218R1 ■	64,880	

* 40 A onwards

■ Stock items

Tmax power distribution circuit breakers

Protection: TMA



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36kA	100%
S	50kA	100%
H	70kA	100%



TMD / TMA*

			N		S		H	
Frame	In (A)	Poles	Ordering code	L.P.(₹)	Ordering code	L.P.(₹)	Ordering code	L.P.(₹)
XT2160	1.6	4	1SDA067021R1	18,350	1SDA067561R1	19,850	1SDA067605R1	25,770
	2		1SDA067022R1		1SDA067562R1		1SDA067606R1	
	2.5		1SDA067023R1		1SDA067563R1		1SDA067607R1	
	3.2		1SDA067024R1		1SDA067564R1		1SDA067608R1	
	4		1SDA067025R1		1SDA067565R1		1SDA067609R1	
	5		1SDA067026R1		1SDA067566R1		1SDA067610R1	
	6.3		1SDA067027R1		1SDA067567R1		1SDA067611R1	
	8		1SDA067028R1		1SDA067568R1		1SDA067612R1	
	10		1SDA067029R1		1SDA067569R1		1SDA067613R1	
	12.5		1SDA067030R1		1SDA067570R1		1SDA067614R1	
	16		1SDA067031R1	16,070	1SDA067571R1	18,930	1SDA067615R1	24,880
	20		1SDA067032R1		1SDA067572R1		1SDA067616R1	
	25		1SDA067033R1		1SDA067573R1		1SDA067617R1	
	32		1SDA067034R1		1SDA067574R1 ■		1SDA067618R1	
	40		1SDA067035R1		1SDA067575R1		1SDA067619R1	
	50		1SDA067036R1		1SDA067576R1		1SDA067620R1	
	63		1SDA067037R1 ■		1SDA067577R1 ■		1SDA067621R1	
	80		1SDA067038R1		1SDA067578R1		1SDA067622R1	
	100		1SDA067039R1 ■		1SDA067579R1 ■		1SDA067623R1	
	125		1SDA067042R1 ■	22,710	1SDA067582R1 ■	25,210	1SDA067626R1	36,700
	160		1SDA067043R1 ■	25,470	1SDA067583R1 ■	27,530	1SDA067627R1	38,930
XT4 250	200		1SDA068109R1 ■	31,090	1SDA068329R1 ■	35,030	1SDA068362R1	47,010
	225		1SDA068110R1	31,630	1SDA068330R1	35,100	1SDA068363R1	48,010
T5	250		1SDA068111R1 ■	32,200	1SDA068331R1 ■	36,150	1SDA068364R1	48,500
	320		1SDA054477R1 ■	38,210	1SDA054479R1 ■	42,170	1SDA054481R1	50,180
	400		1SDA054478R1 ■		1SDA054480R1 ■		1SDA054482R1 ■	
T6	500		1SDA054487R1 ■	54,070	1SDA054489R1 ■	59,140	1SDA054491R1 ■	68,990
	630		1SDA060210R1 ■	56,130	1SDA060211R1 ■	61,790	1SDA060212R1	71,620
	800		1SDA060222R1 ■	68,150	1SDA060223R1 ■	74,610	1SDA060224R1	77,900

* 40 A onwards

■ Stock items

Tmax power distribution circuit breakers

Protection: LS/I

XT2/XT4/T5/T6



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36kA	100%
S	50kA	100%
H	70kA	100%



Protection : LS/I

			N		S		H	
Frame	In (A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
XT2 160	10	3	1SDA067054R1	21,670	1SDA067800R1	25,910	1SDA067857R1	29,340
	25		1SDA067055R1		1SDA067801R1		1SDA067858R1	
	63		1SDA067056R1	18,670	1SDA067802R1	22,410	1SDA067859R1	28,720
	100		1SDA067057R1		1SDA067803R1		1SDA067860R1	
	160		1SDA067058R1		1SDA067804R1		1SDA067861R1	
XT4 250	250	4	1SDA068126R1	32,290	1SDA068475R1	36,870	1SDA068515R1	42,610
T5 400	400		1SDA054317R1	44,770	1SDA054333R1	46,790	1SDA054349R1	54,170
T5 630	630		1SDA054396R1	47,320	1SDA054404R1	48,500	1SDA054412R1	57,590
T6 800	800		1SDA060268R1	65,640	1SDA060278R1	72,760	1SDA060289R1	90,310
T6 1000*	1000		1SDA060537R1	1,00,920	1SDA060547R1	1,08,880	1SDA060561R1	1,30,090

Frame	In (A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
XT2 160	10	4	1SDA067090R1	27,310	1SDA067833R1	32,110	1SDA067890R1	35,910
	25		1SDA067091R1		1SDA067834R1		1SDA067891R1	
	63		1SDA067092R1	23,750	1SDA067835R1	31,220	1SDA067892R1	35,830
	100		1SDA067093R1		1SDA067836R1		1SDA067893R1	
	160		1SDA067095R1		1SDA067838R1	39,180	1SDA067895R1	48,420
XT4 250	250	4	1SDA068147R1	44,750	1SDA068495R1	47,930	1SDA068535R1	61,490
T5 400	400		1SDA054325R1	51,100	1SDA054341R1	60,770	1SDA054357R1	69,910
T5 630	630		1SDA054400R1	61,340	1SDA054408R1	64,260	1SDA054416R1	84,870
T6 800	800		1SDA060273R1	75,240	1SDA060283R1	91,740	1SDA060294R1	1,11,870
T6 1000*	1000		1SDA060542R1	1,46,090	1SDA060556R1	1,52,720	1SDA060566R1	1,85,870

Note: XT2/XT4 with Ekip LS/I release ; T5-T6 with PR221 LS/I release

*Extended front (EF) terminals are supplied as standard in T6 1000A MCCB

Tmax power distribution circuit breakers NEW

Protection: LIG

MCCBs with Overload, Short circuit and Earth Fault Protections XT2/XT4

Conventional Solution	ABB Intelligent solution
MCCB with Overload (L) and Short-circuit protection (I)	MCCB with Ekip DIG LIG release - Integrated Overload(L), Short-circuit (I) and Earth Fault (G) protections
External Earth Fault Module (G)	
Power supply module	
Shunt release	
Wire-harness assembly	



Ekip DIP LIG with XT2/XT4 MCCBs

Microprocessor based electronic trip units

Protection functions	Threshold
Overload "L" Protection	0.4...1 x In in steps of 0.04
Inst. Short-circuit "I" Protection	OFF - 1...10 x In
Earth Fault "G" Protection	OFF - 0.2 to 1 x In

Ekip LIG		N Version (Icu=Ics=36kA @ 415 V AC)		S Version (Icu=Ics=50kA @ 415 V AC)		
Frame	Poles	In (A)	Ordering Code	L.P.(₹)	Ordering Code	L.P.(₹)
XT2 160	3	63	1SDA100012R1 ■	28,830	1SDA100042R1 ■	30,360
		100	1SDA100013R1 ■	28,830	1SDA100043R1 ■	30,360
		160	1SDA100014R1 ■	33,550	1SDA100044R1 ■	35,790
XT4 250		250	1SDA100185R1 ■	35,270	1SDA100215R1 ■	37,270
XT2 160	4	63	1SDA100027R1 ■	37,300	1SDA100057R1 ■	39,290
		100	1SDA100028R1 ■	37,300	1SDA100058R1 ■	39,290
		160	1SDA100029R1 ■	43,440	1SDA100059R1 ■	46,350
XT4 250		250	1SDA100200R1 ■	45,670	1SDA100230R1 ■	48,280

■ Stock items

Tmax power distribution circuit breakers

Protection: LSIG

XT2/XT4/T5/T6



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36kA	100%
S	50kA	100%
H	70kA	100%



Ekip LSIG/XT2-XT4 Ekip LSIG/ T5/T6 PR222DS/P-LSIG

			N		S		H	
Frame	In (A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
XT2 160	10	3	1SDA067072R1	40,100	1SDA067815R1	42,910	1SDA067872R1	52,550
	25		1SDA067073R1		1SDA067816R1 ■		1SDA067873R1	
	63		1SDA067074R1 ■	39,110	1SDA067817R1 ■	41,720	1SDA067874R1	50,110
	100		1SDA067075R1 ■		1SDA067818R1 ■		1SDA067875R1	
	160		1SDA067076R1 ■	42,540	1SDA067819R1 ■	48,290	1SDA067876R1	57,190
XT4 250	250		1SDA068141R1 ■	47,700	1SDA068490R1 ■	51,600	1SDA068530R1 ■	58,340
T5 400	400	3	1SDA054323R1 ■	60,700	1SDA054339R1 ■	63,230	1SDA054355R1	79,090
T5 630	630		1SDA054399R1 ■	64,390	1SDA054407R1 ■	67,020	1SDA054415R1 ■	81,740
T6 800	800		1SDA060271R1 ■	98,790	1SDA060281R1 ■	1,03,340	1SDA060292R1	1,17,620
T6 1000*	1000		1SDA060540R1	1,33,840	1SDA060554R1 ■	1,47,090	1SDA060564R1	1,68,550

PR222DS/P-LSIG

			N		S		H	
Frame	In (A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
XT2 160	10	4	1SDA067108R1	47,950	1SDA067851R1	50,900	1SDA067908R1	62,050
	25		1SDA067109R1		1SDA067852R1		1SDA067909R1	
	63		1SDA067110R1 ■	45,200	1SDA067853R1 ■	48,460	1SDA067910R1	59,750
	100		1SDA067111R1 ■		1SDA067854R1 ■		1SDA067911R1	
	160		1SDA067113R1 ■	51,080	1SDA067856R1 ■	52,220	1SDA067913R1	63,740
XT4 250	250		1SDA068162R1 ■	59,170	1SDA068510R1 ■	60,570	1SDA068550R1	82,500
T5 400	400	4	1SDA054331R1 ■	68,870	1SDA054347R1 ■	70,810	1SDA054363R1	92,280
T5 630	630		1SDA054403R1 ■	75,790	1SDA054411R1 ■	82,190	1SDA054419R1	1,10,950
T6 800	800		1SDA060276R1 ■	1,13,950	1SDA060286R1 ■	1,23,670	1SDA060297R1	1,49,030
T6 1000*	1000		1SDA060545R1 ■	1,76,610	1SDA060559R1	1,82,560	1SDA060569R1	2,13,610

Note: *Extended front (EF) terminals are supplied as standard in T6 1000A MCCB

Tmax power distribution circuit breakers

For MODBUS communication

XT2/XT4/T5/T6



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36kA	100%
S	50kA	100%
H	70kA	100%



Ekip LSIG

			N		S		H	
Frame	In (A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
XT2 160	10	3	1SDA067072R1	40,100	1SDA067815R1	42,910	1SDA067872R1	52,550
	25		1SDA067073R1		1SDA067816R1 ■		1SDA067873R1	
	63		1SDA067074R1 ■	39,110	1SDA067817R1 ■	41,720	1SDA067874R1	50,110
	100		1SDA067075R1 ■		1SDA067818R1 ■		1SDA067875R1	
	160		1SDA067076R1 ■	42,540	1SDA067819R1 ■	48,290	1SDA067876R1	57,190
XT4 250	250		1SDA068141R1 ■	47,700	1SDA068490R1 ■	51,600	1SDA068530R1 ■	58,340
XT2 160	10	4	1SDA067108R1	47,950	1SDA067851R1	50,900	1SDA067908R1	62,050
	25		1SDA067109R1		1SDA067852R1		1SDA067909R1	
	63		1SDA067110R1 ■	45,200	1SDA067853R1 ■	48,460	1SDA067910R1	59,750
	100		1SDA067111R1 ■		1SDA067854R1 ■		1SDA067911R1	
	160		1SDA067113R1 ■	51,080	1SDA067856R1 ■	52,220	1SDA067913R1	63,740
XT4 250	250		1SDA068162R1 ■	59,170	1SDA068510R1 ■	60,570	1SDA068550R1	82,500

Note : Consider ordering "Ekip Com" for MODBUS communication (Refer page no 50)

PR222DS/PD-LSIG

Frame	In (A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
T5 400	400	3	1SDA081522R1	90,700	1SDA081525R1 ■	93,230	1SDA081528R1	1,09,090
T5 630	630		1SDA081523R1	94,390	1SDA081526R1 ■	97,020	1SDA081529R1	1,11,740
T6 800	800		1SDA081540R1	1,28,790	1SDA081546R1	1,33,340	1SDA081552R1	1,47,620
T6 1000*	1000		1SDA081541R1	1,63,840	1SDA081547R1	1,77,090	1SDA081553R1	1,98,550
T5 400	400	4	1SDA081531R1	98,870	1SDA081534R1	1,00,810	1SDA081537R1	1,22,280
T5 630	630		1SDA081532R1	1,05,790	1SDA081535R1	1,12,190	1SDA081538R1	1,40,950
T6 800	800		1SDA081543R1	1,43,950	1SDA081549R1	1,53,670	1SDA081555R1	1,79,030
T6 1000*	1000		1SDA081544R1	2,06,610	1SDA081550R1	2,12,560	1SDA081556R1	2,43,610


Note: Order X3 connector - 1SDA055059R1 along with PR222DS/PD-LSIG

*Extended front (EF) terminals are supplied as standard in T6 1000A MCCB

■ Stock items

Tmax power distribution circuit breakers

T7



Breaking capacity at 415VAC

	Icu	Ics (Icu)
S	50kA	100%
H	70kA	100%



T7 1250/1600 PR231/P LS/I

In (A)	Poles
1250	3
1600	
1250	4
1600	

S

Ordering code	L.P. (₹)
1SDA062866R1	1,37,490
1SDA062994R1 ■	1,58,130
1SDA062874R1 ■	1,72,430
1SDA063002R1	1,89,670

H

Ordering code	L.P. (₹)
1SDA062898R1	1,86,170
1SDA063026R1	2,04,420
1SDA062906R1	2,22,200
1SDA063034R1	2,46,410

PR331/P LSIG

1250	3
1600	
1250	4
1600	

1SDA062868R1 ■	1,76,470
1SDA062996R1	1,83,330
1SDA062876R1	1,95,880
1SDA063004R1	2,15,450

1SDA062900R1	2,11,510
1SDA063028R1	2,31,670
1SDA062908R1	2,49,320
1SDA063036R1	2,69,480

PR332/P LSIG

1250	3
1600	
1250	4
1600	

1SDA062871R1	1,83,330
1SDA062999R1	1,98,830
1SDA062879R1	2,09,110
1SDA063007R1	2,28,640

1SDA062903R1	2,26,360
1SDA063031R1	2,45,290
1SDA062911R1	2,62,390
1SDA063039R1	2,88,170

T7 1250M/1600M PR231/P LS/I



In (A)	Poles
1250	3
1600	
1250	4
1600	

S

Ordering code	L.P. (₹)
1SDA062882R1	1,58,130
1SDA063010R1	1,75,270
1SDA062890R1	1,76,220
1SDA063018R1	2,11,400

H

Ordering code	L.P. (₹)
1SDA062914R1	2,06,210
1SDA063042R1	2,30,430
1SDA062922R1	2,47,650
1SDA063050R1	2,75,330

PR331/P LSIG

1250	3
1600	
1250	4
1600	

1SDA062884R1	1,84,430
1SDA063012R1	2,01,130
1SDA062892R1	2,14,230
1SDA063020R1	2,37,800

1SDA062916R1	2,34,590
1SDA063044R1	2,55,870
1SDA062924R1	2,74,790
1SDA063052R1	3,02,590

PR332/P LSIG

1250	3
1600	
1250	4
1600	

1SDA062887R1	1,95,880
1SDA063015R1	2,14,230
1SDA062895R1	2,27,430
1SDA063023R1	2,49,260

1SDA062919R1	2,46,410
1SDA063047R1	2,69,480
1SDA062927R1	2,89,520
1SDA063055R1	3,16,220

Note : For Motorizable T7 M frame, order along with above code, motor operator, shunt opening coil & shunt closing coil of required voltage.

■ Stock items

Tmax motor protection circuit breakers

Characteristics of circuit-breakers for protecting motors in three pole versions.

Tmax Motor Protection Trip units

➤ Magnetic trip units:

Frame	Protection	Range
XT2 160	MF ($I_n \leq 12.5A$)	$14 \times I_n$
	MA ($12.5A < I_n \leq 160$)	$6..14 \times I_n$
XT3 250	MA	$6..12 \times I_n$
XT4 250	MA	$5..10 \times I_n$

MF – Magnetic fix

MA- Magnetic Adjustable

➤ Microprocessor trip units:

o Only Short circuit protection release

XT2/XT4		T5/T6		T7/T7M	
Ekip M-I	$I = 6 - 14 \text{ of } I_n$	PR221 DS-I	$I = 1 - 10 \text{ of } I_n$	PR231P-I	$I = 1 - 10 \text{ of } I_n$

o Advanced Motor protection release

XT2/XT4		XT2/XT4/T5/T6	
Ekip M-LIU	L = 0.4 - 1 of I_n	Ekip M-LRIU	L = 0.4 - 1 of I_n
	I = 6 - 13 of I_n		R = 3 - 9 of I_n
	U* = ON or OFF		I = 6 - 13 of I_n
			G = 0.2 - 1 of I_n
			U* = ON or OFF

L = Overload; R = Protection against rotor blockage; I = Instantaneous short circuit; G = Earth fault

U = phase loss (U): With selector in ON position, circuit breaker trips if at least one current phase is lower than $0.1 \times I_n$ and at least a second one higher than $0.25 \times I_n$.



Tmax motor protection circuit breakers

Advantages of Ekip M-LRIU protection unit:

Duty mode setting (Normal/Heavy):


- Normal duty mode requires use of a circuit-breaker and a contactor. In the case of tripping, the Ekip M-LRIU release commands the opening of the contactor via PR212/CI;
- Heavy duty mode foresees circuit-breaker opening for all overcurrent conditions, and just the function of motor operation is entrusted to the contactor

PTC protection setting:


- PTC: this protection, monitors the temperature inside the protected motor by means of a PTC sensor.

❖ ABB solutions for starting, switching and protection of three-phase asynchronous motors:

- o A traditional system
- o A system of integrated protection

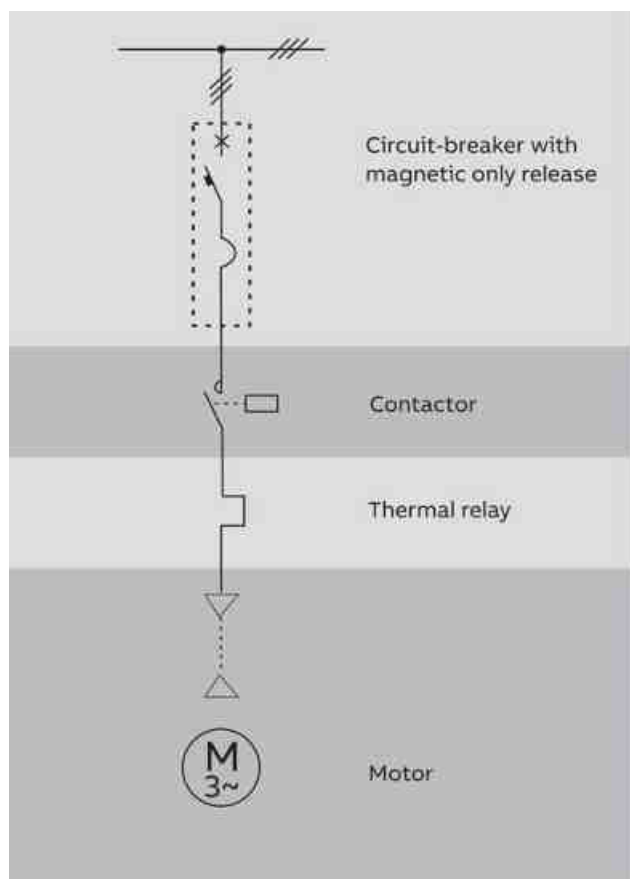

Traditional System

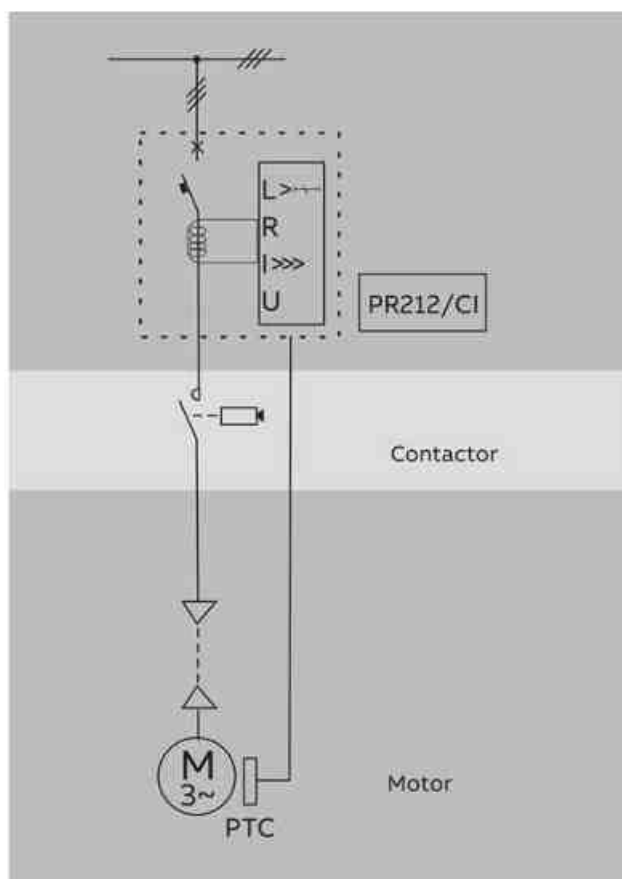

System of integrated protection

Tmax motor distribution circuit breakers

Protection: Magnetic only

XT2/XT4



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36kA	100%
S	50kA	100%
H	70kA	100%

MF/MA*

			N		S		H	
In (A)	In (A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
XT2 160	1	3	1SDA067044R1	14,270	1SDA067760R1	15,400	1SDA067770R1	17,290
	2		1SDA067045R1		1SDA067761R1		1SDA067771R1	
	4		1SDA067046R1		1SDA067762R1		1SDA067772R1	
	8.5		1SDA067047R1		1SDA067763R1 ■		1SDA067773R1	
	12.5		1SDA067048R1 ■	14,060	1SDA067764R1 ■	15,180	1SDA067774R1	17,070
	20		1SDA067049R1 ■		1SDA067765R1 ■		1SDA067775R1	
	32		1SDA067050R1 ■		1SDA067766R1 ■		1SDA067776R1	
	52		1SDA067051R1 ■		1SDA067767R1 ■		1SDA067777R1	
	80		1SDA067052R1 ■		1SDA067768R1 ■		1SDA067778R1	
	100		1SDA067053R1 ■		1SDA067769R1 ■		1SDA067779R1	
	160		1SDA076529R1	16,820	1SDA076530R1 ■	17,600	1SDA076535R1	23,420
XT4 250	200		1SDA068121R1	29,470	1SDA068440R1 ■	32,060	1SDA068450R1	38,820

* 20 amps onwards

XT3



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36KA	75%
S	50KA	50%

MA

			N		S	
Frame	In (A)	Poles	Ordering code	L.P.(₹)	Ordering code	L.P.(₹)
XT3 250	100	3	1SDA068071R1	16,820	1SDA068279R1	17,490
	125		1SDA068072R1		1SDA068280R1	
	160		1SDA068073R1		1SDA068281R1	
	200		1SDA068074R1	19,240	1SDA068282R1 ■	19,800

■ Stock items

Tmax motor protection circuit breakers

Microprocessor based short circuit protection MCCBs

XT2/XT4/T5/T6/T7/T7M



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36KA	100%
S	50KA	100%
H	70KA	100%



Ekip M-I

In (A)	In (A)	Poles
XT2 160	20	3
	32	
	52	
	100	
	160	
XT4 250	250	

Ordering code	L.P. (₹)
1SDA067086R1	18,760
1SDA067087R1	
1SDA067088R1	
1SDA067089R1	
1SDA067063R1	
1SDA068131R1 ■	35,160

Ordering code	L.P. (₹)
1SDA067829R1	22,460
1SDA067830R1	
1SDA067831R1	
1SDA067832R1	
1SDA067809R1	
1SDA068480R1 ■	38,130

Ordering code	L.P. (₹)
1SDA067886R1	24,210
1SDA067887R1	
1SDA067888R1	
1SDA067889R1	
1SDA067866R1	
1SDA068520R1	45,620

T5

PR221 DS-I

In (A)	Poles
400	3
630	

Ordering code	L.P. (₹)
1SDA054319R1	40,070
1SDA054397R1 ■	42,670

Ordering code	L.P. (₹)
1SDA054335R1 ■	44,280
1SDA054405R1 ■	48,160

Ordering code	L.P. (₹)
1SDA054351R1	54,040
1SDA054413R1	57,480

T6 800

PR221 DS-I

In (A)	Poles
800	3
1000	

Ordering code	L.P. (₹)
1SDA060269R1	69,360
1SDA060538R1	1,06,190

Ordering code	L.P. (₹)
1SDA060279R1	77,700
1SDA060548R1	1,14,550

Ordering code	L.P. (₹)
1SDA060290R1	95,570
1SDA060562R1	1,46,430



T7 1250/1600

PR231/P I

In (A)	Poles
1250	3
1600	3

Ordering code	L.P. (₹)
1SDA062865R1	1,39,000
1SDA062993R1	1,67,130

Ordering code	L.P. (₹)
1SDA062897R1	1,97,100
1SDA063025R1	2,16,750

T7 1250M/1600M

PR231/P I

In (A)	Poles
1250	3
1600	3

Ordering code	L.P. (₹)
1SDA062881R1	1,71,800
1SDA063009R1	1,85,600

Ordering code	L.P. (₹)
1SDA062913R1	2,18,660
1SDA063041R1	2,44,580

■ Stock items

Tmax motor protection circuit breakers

Advanced Motor Protection MCCBs

T5/T6



Breaking capacity at 415VAC

	Icu	Ics (Icu)
N	36kA	100%
S	50kA	100%
H	70kA	100%



T5

Ekip M-LRIU

In (A)	Poles
320	3
400	3

N

Ordering code	L.P.(₹)
1SDA054551R1	65,640
1SDA064157R1	

S

Ordering code	L.P.(₹)
1SDA054553R1	73,490
1SDA064158R1	

T6

Ekip M-LRIU

In (A)	Poles
630	3

N

Ordering code	L.P.(₹)
1SDA060311R1	91,860





S

Ordering code	L.P.(₹)
1SDA060312R1	1,00,330

H

Ordering code	L.P.(₹)
1SDA060313R1	1,16,340


Tmax switch disconnectors



SD Frame	In(A)	Icw kA (1s)	Poles	Ordering code	L.P.(₹)
XT1D	160	2	3	1SDA068208R1	9,560
XT3D	250	3		1SDA068210R1	21,200
XT4D	250	3.6		1SDA068212R1	23,980
T5D	400	3.6		1SDA054599R1	31,110
T5D	500	3.6		1SDA054601R1	37,820
T6D	630	15		1SDA060343R1	42,750
T6D	800	15		1SDA060345R1	47,200
T6D	1000	15		1SDA060594R1	82,050
T7D	1000	20		1SDA062032R1	93,100
T7D	1250	20		1SDA062036R1	1,26,720
T7D	1600	20		1SDA062040R1	1,32,030
T7D M	1000	20		1SDA062034R1	1,14,890
T7D M	1250	20		1SDA062038R1	1,45,260
T7D M	1600	20		1SDA062042R1	1,59,870

SD Frame	In(A)	Icw kA (1s)	Poles	Ordering code	L.P.(₹)
XT1D	160	2	4	1SDA068209R1	14,150
XT3D	250	3		1SDA068211R1	25,340
XT4D	250	3.6		1SDA068213R1	31,780
T5D	400	3.6		1SDA054600R1	39,440
T5D	500	3.6		1SDA054602R1	48,140
T6D	630	15		1SDA060344R1	51,350
T6D	800	15		1SDA060346R1	76,960
T6D	1000	15		1SDA060595R1	1,02,430
T7D	1000	20		1SDA062033R1	1,18,610
T7D	1250	20		1SDA062037R1	1,55,800
T7D	1600	20		1SDA062041R1	1,62,450
T7D M	1000	20		1SDA062035R1	1,45,320
T7D M	1250	20		1SDA062039R1	1,78,700
T7D M	1600	20		1SDA062043R1	1,99,810

Tmax accessories




Accessories for T-Max MCCBs

Extended spreaded terminals - ES

Frame	Description	Ordering code	L.P. (₹)
XT1	KIT ES XT1 6pcs	1SDA066891R1 ■	1,970
	KIT ES XT1 8pcs	1SDA066892R1 ■	2,640
XT2	KIT ES XT2 6pcs	1SDA066895R1 ■	2,670
	KIT ES XT2 8pcs	1SDA066896R1 ■	3,260
XT3	KIT ES XT3 6pcs	1SDA066899R1 ■	2,870
	KIT ES XT3 8pcs	1SDA066900R1 ■	3,660
XT4	KIT ES XT4 6pcs	1SDA066903R1 ■	3,310
	KIT ES XT4 8pcs	1SDA066904R1 ■	4,160
T5	Kit EST5 6pcs	1SDA055038R1 ■	4,720
	Kit EST5 8pcs	1SDA055039R1 ■	6,270

Note: Phase barrier supplied as standard with above copper spreaders.



Separator - PB

Frame	Description	Ordering code	L.P. (₹)
XT1-XT3	PB 100mm 4pcs XT1-XT3 3p	1SDA066676R1	810
	PB 200mm 4pcs XT1-XT3 3p	1SDA066678R1	1,010
	PB 100mm 6pcs XT1-XT3 4p	1SDA066681R1	1,190
	PB 200mm 6pcs XT1-XT3 4p	1SDA066683R1	1,490
XT2-XT4	PB 100mm 4pcs XT2-XT4 3p	1SDA066675R1	850
	PB 200mm 4pcs XT2-XT4 3p	1SDA066677R1 ■	1,280
	PB 100mm 6pcs XT2-XT4 4p	1SDA066680R1	1,280
	PB 200mm 6pcs XT2-XT4 4p	1SDA066682R1	1,890
T5	PB100 4 pcs - Low T4, T5	1SYN850207R0001	1,130
	PB100mm 4pcs T4-5-T7-A3 3P	1SDA054970R1	1,050
	PB 100mm 6pcs T4-5-T7-A3 3P	1SDA054971R1	1,520
	PB100 4 pcs - Low T4, T5	1SYN850207R0001	1,130
	PB100 6 pcs - Low T4, T5 - 400A	1SYN850210R0001 ■	1,590

Note: For T5 630A contact the nearest sales office

Rotary handle operating mechanism




Direct - RHD

Frame	Description	Ordering code	L.P. (₹)
XT1...XT4	RHD XT1-XT3 F/P STANDARD DIRECT	1SDA066475R1 ■	1,850
	RHD XT2-XT4 F/P STANDARD DIRECT	1SDA069053R1 ■	2,200
	RHD XT2-XT4 W STANDARD DIRECT	1SDA066476R1	2,200
T5	RHD Normal for Fixed/Plug-in T4-T5	1SDA054926R1 ■	3,900
	RHD Normal for withdrawable T4-T5	1SDA054928R1	4,320
T6	RHD Normal for fixed T6	1SDA060405R1 ■	5,330
	RHD Normal for withdrawable T6	1SDA060407R1	6,700
T7	RHD Normal for Fixed/Plug-in T7	1SDA062120R1	6,910

Note:- F/P: Fixed/Plug-in ; W: Withdrawable

Tmax accessories




Transmitted - RHE			
Frame	Description	Ordering code	L.P. (₹)
XT1...XT4	RHE XT1-XT3 F/P STANDARD RETURNED(250mm)	1SDA082810R1 ■	1,700
	RHE XT1-XT3 F/P STANDARD RETURNED (500mm)	1SDA066479R1	1,930
	RHE XT2-XT4 F/P STANDARD RETURNED (250mm)	1SDA082811R1 ■	2,250
	RHE XT2-XT4 F/P STANDARD RETURNED (500mm)	1SDA069055R1	2,490
	RHE XT2-XT4 W STANDARD RETURNED	1SDA066480R1 ■	2,490
	RHS L XT2-XT4 F/P STAND. SX LATERAL	1SDA069058R1	3,970
	RHS R XT2-XT4 F/P STAND. DX LATERAL	1SDA069060R1	3,910
T5	RHE Normal for Fixed/Plug-in T4-T5 250mm	1SDA070447R1 ■	3,620
	RHE Normal for Withdrawable T4-T5	1SDA054933R1 ■	6,580
T6	RHE Normal for Fixed T6	1SDA060409R1 ■	6,880
	RHE Normal for Withdrawable T6	1SDA060411R1	7,990
T7	RHE Normal for Fixed/Plug-in T7	1SDA062122R1 ■	8,350

Note:- F/P: Fixed/Plug-in ; W: Withdrawable



Electrical signals


Auxiliary contact - AUX (Uncabled version)			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	AUX 1Q 250Vac/dc XT1...XT4	1SDA066422R1 ■	1,030
	AUX 1Q 24Vdc XT1...XT4	1SDA066423R1	1,590



Auxiliary contact - AUX			
Frame	Description	Ordering code	L.P. (₹)
T5..T6(1)	AUX 1Q 1SY 250V AC/DC T1...T6 (1)	1SDA051368R1 ■	1,820
	AUX 3Q 1SY 250V AC/DC T1...T6 (1)	1SDA051369R1	2,910
	AUX 3Q 1SY 24V DC T1...T6 (1)	1SDA054914R1	2,810
T5	AUX-SA 1 S51 T4-T5	1SDA055050R1	
T7M	AUX 2Q 24V DC T7M-X1	1SDA062101R1	1,820
	AUX 2Q 400V AC T7M-X1	1SDA062102R1	
T7M	AUX SA T7M-X1 S51 24VDC	1SDA066100R1	6,870
	AUX SA T7M-X1 S51 250VAC	1SDA063553R1	7,990
T7	AUX 1Q + 1SY 24V DC T7	1SDA062103R1	
	AUX 1Q + 1SY 400V AC T7	1SDA062104R1 ■	2,810


Note : Q=Changeover contact;SY= Trip indication contact

For T7 / T7M in Withdrawable version sliding contact blocks for fixed and moving parts are necessary.



Cabled contact in electronic version			
Frame	Description	Ordering code	L.P. (₹)
T5	AUX-E-C 1Q 1SY T4-T5	1SDA054916R1	5,910
T6	AUX-E-C 1Q 1SY T6	1SDA064161R1	6,880

Tmax accessories



Auxiliary contact cabled-version - AUX - C			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	AUX-C 1Q+1SY 250V AC/DC XT1..XT4 F/P	1SDA066431R1 ■	1,720
	AUX-C 2Q+1SY 250VAC/DC XT1..XT4 F/P	1SDA066433R1 ■	2,730
	AUX-C 3Q+1SY 250VAC/DC XT2..XT4 F/P	1SDA066434R1 ■	3,240
	AUX-C 3Q+2SY 250VAC/DC XT2-XT4 F/P	1SDA066436R1	3,980
	AUX-C 2Q+2SY+1S51 250VAC/DC XT2-XT4 F/P	1SDA066438R1	4,300
	AUX-C 2Q 400V AC XT2-XT4 F/P	1SDA066440R1	2,060
	AUX-C 1Q+1SY 400Vac XT2-XT4 F/P	1SDA066444R1	3,260
	AUX-C 1Q+1SY 24Vdc XT1..XT4 F/P	1SDA066446R1 ■	2,400
T5-T6	AUX-C 3Q+1SY 24VDC XT2..XT4 F/P	1SDA066448R1	3,750
	AUX-C 1Q 1SY 250V AC/DC C T4-T5-T6	1SDA054910R1	2,400
	AUX-C 1Q 1SY 400V AC C T4-T5-T6	1SDA054912R1	3,510
	AUX-C 2Q 400V AC C T4-T5-T6	1SDA054913R1	4,030
	AUX-C 3Q 1SY 24VDC C T4-T5-T6	1SDA054915R1	3,780
	AUX-C 3Q 1SY 250V AC/DC C T4-T5-T6	1SDA054911R1 ■	4,470

Note : Q=Changeover contact;SY= Trip indication contact ;F/P: Fixed/Plug-in ; W: Withdrawable


Opening release

Shunt opening release - SOR (Un-cabled version - For Fixed and Plug-in circuit breakers)			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	SOR XT1..XT4 12 VDC	1SDA066313R1	2,400
	SOR XT1..XT4 24-30 V AC/DC	1SDA066314R1 ■	
	SOR XT1..XT4 48-60 V Ac/DC	1SDA066315R1	
	SOR XT1..XT4 110...127 V ac-110...125 V dc	1SDA066316R1	
	SOR XT1..XT4 220...240 V ac-220...250 V dc	1SDA066317R1 ■	
	SOR XT1..XT4 380-440 V ac	1SDA066318R1	
	SOR XT1..XT4 480-525 V ac	1SDA066319R1	
T5-T6	SOR 12V DC T4-T5-T6	1SDA054862R1	3,620
	SOR 24V AC/DC T4-T5-T6	1SDA054863R1	
	SOR 48...60V AC/DC T4-T5-T6	1SDA054864R1	
	SOR 110...120V AC-110...125V DC T4-T5-T6	1SDA054865R1 ■	
	SOR 220...240V AC-220...250V DC T4-T5-T6	1SDA054866R1	
	SOR 380...440V AC T4-T5-T6	1SDA054867R1	
T7-T7M-X1	SOR 480...500V AC T4-T5-T6	1SDA054868R1	7,040
	SOR 24V AC/DC T7-T7M-X1	1SDA062065R1	
	SOR 30V AC/DC T7-T7M-X1	1SDA062066R1	
	SOR 48V AC/DC T7-T7M-X1	1SDA062067R1	
	SOR 60V AC/DC T7-T7M-X1	1SDA062068R1	
	SOR 110...120V AC/DC T7-T7M-X1	1SDA062069R1	
	SOR 120...127V AC/DC T7-T7M-X1	1SDA063547R1	
	SOR 220...240V AC/DC T7-T7M-X1	1SDA063548R1	
	SOR 240...250V AC/DC T7-T7M-X1	1SDA062070R1	
	SOR 380...400V AC T7-T7M-X1	1SDA062071R1	
	SOR 415...440V AC T7-T7M-X1	1SDA062072R1	

Note: For T7 / T7M in Withdrawable version sliding contact blocks for fixed and moving parts are necessary.

■ Stock items

Tmax accessories



Shunt opening release - SOR - C (Cabled version)			
Frame	Description	Ordering code	L.P. (₹)
XT1...XT4	SOR-C XT1...XT4 F/P 12 Vdc	1SDA066321R1	3,660
	SOR-C XT1...XT4 F/P 24-30 Vac/dc	1SDA066322R1	
	SOR-C XT1...XT4 F/P 48-60 Vac/dc	1SDA066323R1	
	SOR-C XT1...XT4 F/P 110-127Vac-110-125Vdc	1SDA066324R1	
	SOR-C XT1...XT4 F/P 220-240Vac-220-250Vdc	1SDA066325R1	
	SOR-C XT1...XT4 F/P 380-440 Vac	1SDA066326R1	4,280
	SOR-C XT1...XT4 F/P 480-525 Vac	1SDA066327R1	
	SOR-C XT2-XT4 W 12 Vdc	1SDA066328R1	
	SOR-C XT2-XT4 W 24-30 Vac/dc	1SDA066329R1	
	SOR-C XT2-XT4 W 48-60 Vac/dc	1SDA066330R1	
	SOR-C XT2-XT4 W 110-127Vac-110-125Vdc	1SDA066331R1	
	SOR-C XT2-XT4 W 220-240Vac-220-250Vdc	1SDA066332R1	
	SOR-C XT2-XT4 W 380-440 Vac	1SDA066333R1	
	SOR-C XT2-XT4 W 480-525 Vac	1SDA066334R1	
T5-T6	SOR-C 12V DC T4-T5-T6	1SDA054869R1	6,380
	SOR-C 24V AC/DC T4-T5-T6	1SDA054870R1	
	SOR-C 48...60V AC/DC T4-T5-T6	1SDA054871R1	
	SOR-C 110...120V AC-110...125V DC T4-T5-T6	1SDA054872R1	6,380
	SOR-C 220...240V AC-220...250V DC T4-T5-T6	1SDA054873R1 ■	
	SOR 380...440V AC T4-T5-T6	1SDA054875R1	
	SOR 480...500V AC T4-T5-T6	1SDA054868R1	6,410

Note:- F/P: Fixed/Plug-in ; W: Withdrawable

Test unit- SOR

Frame	Description	Ordering code	L.P. (₹)
T7-T7M-X1-E1/6	SOR test unit T7-T7M-X1-E1/6	1SDA050228R1	33,980


Under voltage release - UVR (Un-cabled version - For Fixed and Plug-in circuit breakers)			
Frame	Description	Ordering code	L.P. (₹)
XT1...XT4	UVR XT1...XT4 24-30 VAC/DC	1SDA066389R1	4,500
	UVR XT1...XT4 48 VAC/DC	1SDA069064R1	
	UVR XT1...XT4 60 VAC/DC	1SDA066390R1	
	UVR XT1...XT4 110-127Vac-110-125Vdc	1SDA066391R1	
	UVR XT1...XT4 220-240Vac-220-250Vdc	1SDA066392R1 ■	
	UVR XT1...XT4 380-440 Vac	1SDA066393R1 ■	
	UVR XT1...XT4 480-525 Vac	1SDA066394R1	
T5-T6	UVR 24V AC/DC T4-T5-T6	1SDA054880R1	8,350
	UVR 48V AC/DC T4-T5-T6	1SDA054881R1	
	UVR 60V AC/DC T4-T5-T6	1SDA054882R1	
	UVR 110...120V AC-110...125V DC T4-T5-T6	1SDA054883R1 ■	
	UVR 220...240V AC-220...250V DC T4-T5-T6	1SDA054884R1 ■	
	UVR 380...440V AC T4-T5-T6	1SDA054885R1 ■	
	UVR 480...500V AC T4-T5-T6	1SDA054886R1	
T7-T7M	UVR 24V AC/DC T7-T7M-X1	1SDA062087R1	9,380
	UVR 30V AC/DC T7-T7M-X1	1SDA062088R1	
	UVR 48V AC/DC T7-T7M-X1	1SDA062089R1	
	UVR 60V AC/DC T7-T7M-X1	1SDA062090R1	
	UVR 110...120V AC/DC T7-T7M-X1	1SDA062091R1	
	UVR 120...127V AC/DC T7-T7M-X1	1SDA063551R1	
	UVR 220...240V AC/DC T7-T7M-X1	1SDA063552R1	
	UVR 240...250V AC/DC T7-T7M-X1	1SDA062092R1	
	UVR 380...400V AC T7-T7M-X1	1SDA062093R1	
	UVR 415...440V AC T7-T7M-X1	1SDA062094R1	

Note: For T7 TM in Withdrawable version sliding contact blocks for fixed and moving parts are necessary.

Tmax accessories


Under voltage release C - UVR - C (Cabled version)			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	UVR-C XT1...XT4 F/P 24-30 VAC/DC	1SDA066396R1	7,030
	UVR-C XT1...XT4 F/P 48 Vac/dc	1SDA069065R1	
	UVR-C XT1...XT4 F/P 60 Vac/dc	1SDA066397R1	
	UVR-C XT1...XT4 F/P 110-127Vac-110-125Vdc	1SDA066398R1	
	UVR-C XT1...XT4 F/P 220-240Vac-220-250Vdc	1SDA066399R1	
	UVR-C XT1...XT4 F/P 380-440 Vac	1SDA066400R1	
	UVR-C XT1...XT4 F/P 480-525 Vac	1SDA066401R1	7,610
	UVR-C XT2-XT4 W 24-30 Vac/dc	1SDA066403R1	
	UVR-C XT2-XT4 W 48 Vac/dc	1SDA069066R1	
	UVR-C XT2-XT4 W 60 Vac/dc	1SDA066404R1	
	UVR-C XT2-XT4 W 110-127Vac-110-125Vdc	1SDA066405R1	
	UVR-C XT2-XT4 W 220-240Vac-220-250Vdc	1SDA066406R1	
T5-T6	UVR-C XT2-XT4 W 380-440 Vac	1SDA066407R1	11,300
	UVR-C XT2-XT4 W 480-525 Vac	1SDA066408R1	
	UVR-C 24V AC/DC T4-T5-T6	1SDA054887R1	
	UVR-C 48V AC/DC T4-T5-T6	1SDA054888R1	

Note:- F/P: Fixed/Plug-in ; W: Withdrawable



Time delay device for under voltage release- UVD			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	UVD T1...T6 - XT1...XT4 24...30 Vac/dc	1SDA051357R1	37,960
	UVD T1...T6 - XT1...XT4 48...60 Vac/dc	1SDA051358R1	
	UVD T1...T6 - XT1...XT4 110...125 Vac/dc	1SDA051360R1	
	UVD T1...T6 - XT1...XT4 220...250 Vac/dc	1SDA051361R1	
T5...T6	UVD 24...30V AC/DC T1...T6	1SDA051357R1	13,140
	UVD 48...60V AC/DC T1...T6	1SDA051358R1	
	UVD 110...125V AC/DC T1...T6	1SDA051360R1	
T7-T7M	UVD 220...250V AC/DC T1...T6	1SDA051361R1	13,380
	UVD 24/30V AC/DC E1/6 - T7-T7M-X1	1SDA038316R1	
	UVD 48V AC/DC E1/6 - T7-T7M-X1	1SDA038317R1	
	UVD 60V AC/DC E1/6 - T7-T7M-X1	1SDA038318R1	
	UVD 110...125V AC/DC E1/6 - T7-T7M-X1	1SDA038319R1	
	UVD 220...250V AC/DC E1/6 - T7-T7M-X1	1SDA038320R1	

Note: Order along with relative UV release




Shunt closing release

Frame	Description	Ordering code	L.P. (₹)
T7M	SCR 24V AC/DC T7M-X1	1SDA062076R1	8,970
	SCR 30V AC/DC T7M-X1	1SDA062077R1	
	SCR 48V AC/DC T7M-X1	1SDA062078R1	
	SCR 60V AC/DC T7M-X1	1SDA062079R1	
	SCR 110...120V AC/DC T7M-X1	1SDA062080R1	
	SCR 120...127V AC/DC T7M-X1	1SDA063549R1	
	SCR 220...240V AC/DC T7M-X1	1SDA063550R1	
	SCR 240...250V AC/DC T7M-X1	1SDA062081R1	
	SCR 380...400V AC T7M-X1	1SDA062082R1	
	SCR 415...440V AC T7M-X1	1SDA062083R1	

Note: For T7 M in withdrawable version sliding blocks for fixed and moving parts are necessary.

Tmax accessories

Key lock



Key Lock - KLC			
Frame	Description	Ordering code	L.P. (₹)
KLC for Manual Breaker			
XT1....XT4	KLC XT1 KEY LOCK RONIS ON CB DIFF.KEY	1SDA066593R1	2,190
	KLC XT1 KEY LOCK RONIS ON CB TYPE A	1SDA066594R1	
	KLC XT1 KEY LOCK RONIS ON CB TYPE B	1SDA066595R1	
	KLC XT1 KEY LOCK RONIS ON CB TYPE C	1SDA066596R1	
	KLC XT1 KEY LOCK RONIS ON CB TYPE D	1SDA066597R1	
	KLC XT1 KEY LOCK RONIS EQ.FEL.A OP/CL	1SDA066598R1	
	KLC XT2-XT4 KEY LOCK RONIS SE.OP.xC.BRE.	1SDA066599R1	
	KLC XT2-XT4 KEY LOCK RONIS ON CB TYPE A	1SDA066600R1 ■	
	KLC XT2-XT4 KEY LOCK RONIS ON CB TYPE B	1SDA066601R1	
	KLC XT2-XT4 KEY LOCK RONIS ON CB TYPE C	1SDA066602R1	
	KLC XT2-XT4 KEY LOCK RONIS ON CB TYPE D	1SDA066603R1	
	KLC XT2-XT4 KEY LOCK RONIS EQ.FE.A OP/CL	1SDA066604R1	
	KLC XT3 KEY LOCK RONIS SEV.OP. X C.BREA.	1SDA066605R1	
	KLC XT3 KEY LOCK RONIS ON CB TYPE A	1SDA066606R1	
	KLC XT3 KEY LOCK RONIS ON CB TYPE B	1SDA066607R1	
	KLC XT3 KEY LOCK RONIS ON CB TYPE C	1SDA066608R1	
	KLC XT3 KEY LOCK RONIS ON CB TYPE D	1SDA066609R1	
	KLC XT3 KEY LOCK RONIS EQ.FEL.A OP/CL	1SDA066610R1	
T7	KLC-D Key Lock - Different Key in Open Position T7	1SDA062134R1	3,780
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20005) T7	1SDA062135R1	
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20006) T7	1SDA062136R1	
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20007) T7	1SDA062137R1	
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20008) T7	1SDA062138R1	
	KLC Arrangement for Ronis Key Lock T7	1SDA062139R1	
T7 M	KLC Arrangement for Profalux Key Lock T7	1SDA062140R1	4,000
	KLC-D Different Key in open Position T7M	1SDA062141R1	
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20005) T7M	1SDA062142R1	
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20006) T7M	1SDA062143R1	
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20007) T7M	1SDA062144R1	
	KLC-S Same Key for Different Groups of Circuit Breakers (N. 20008) T7M	1SDA062145R1	
	KLC Same Key Ronis-Profalux T7M	1SDA062146R1	




Pad Lock - KLC			
Frame	Description	Ordering code	L.P. (₹)
KLC for Manual breaker			
XT1....XT4	PLL XT1-XT3 REMOV.PADL.DEVICE OPEN PLUG	1SDA066588R1	1,620
	PLL XT1-XT3 PADLOCKS DEVICE OPEN	1SDA066589R1	
	PLL XT2-XT4 PADLOCKS DEVICE OPEN	1SDA066590R1	
	PLL XT1-XT3 PADLOCKS DEVICE OP/CL	1SDA066591R1	
	PLL XT2-XT4 PADLOCKS DEVICE OP/CL	1SDA066592R1	




Key Lock for Rotary Handle - RHL			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	RHL XT1..XT4 KEY LOCK RONIS SEVERAL	1SDA066617R1 ■	1,730
	RHL XT1..XT4 KEY LOCK RONIS TYPE A	1SDA066618R1 ■	
	RHL XT1..XT4 KEY LOCK RONIS TYPE B	1SDA066619R1	
	RHL XT1..XT4 KEY LOCK RONIS TYPE C	1SDA066620R1	
	RHL XT1..XT4 KEY LOCK RONIS TYPE D	1SDA066621R1	
	RHL XT1..XT4 KEY LOCK RONIS SEVER. OP/CL	1SDA066622R1	
	RHL XT1..XT4 KEY LOCK RONIS SEVER. OP/CL	1SDA069182R1	
	MOL-D XT1-XT3 KEY LOCK RONIS DIFF. KEY	1SDA066623R1	

■ Stock items

Tmax accessories



Key Lock for Front/Rotary/Fixed Part- KLF			
Frame	Description	Ordering code	L.P. (₹)
T5	KLF-D Lock for Front/Rotary Handle - Different Key in open Position T4-T5	1SDA054939R1	3,710
	KLF-S Block for Front/Rotary Handle - Same Key (N. 20005) T4-T5	1SDA054940R1 ■	
	KLF-S Block for Front/Rotary Handle - Same Key (N. 20006) T4-T5	1SDA054941R1	
	KLF-S Block for Front/Rotary Handle - Same Key (N. 20007) T4-T5	1SDA054942R1	
	KLF-S Block for Front/Rotary Handle - Same Key (N. 20008) T4-T5	1SDA054943R1	
T5-T6	KLF-D FP Different Key for Each Circuit Breaker T4-T5-T6	1SDA055230R1	3,520
	KLF-D FP Same Key for Different Groups of Circuit Breakers T4-T5-T6	1SDA055231R1	
	KLF-D Ronis Fixed Part- Lock Type Ronis T4-T5-T6	1SDA055233R1	
T6	KLF-D Different Key in open Position T6	1SDA060658R1	3,620
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20005) T6	1SDA060659R1	
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20006) T6	1SDA060660R1	
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20007) T6	1SDA060661R1	
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20008) T6	1SDA060662R1	
T7	KLF-D Different Key in open Position T7	1SDA063555R1	3,620
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20005) T7	1SDA063556R1	
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20006) T7	1SDA063557R1	
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20007) T7	1SDA063558R1	
	KLF-S Same Key for Different Groups of Circuit Breakers (N. 20008) T7	1SDA063559R1	
	KLF Arrangment for Ronis key lock T7	1SDA063560R1	
	KLF Arrangment for Profalux key lock T7	1SDA063561R1	

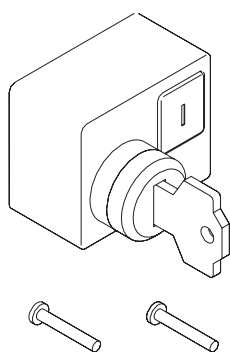

Key lock for motor operated- MOL

Frame	Description	Ordering code	L.P. (₹)
XT1-XT3	MOL-S XT1-XT3 KEY LOCK RONIS TYPE A	1SDA066624R1	
	MOL-S XT1-XT3 KEY LOCK RONIS TYPE B	1SDA066625R1	
	MOL-S XT1-XT3 KEY LOCK RONIS TYPE C	1SDA066626R1	
	MOL-S XT1-XT3 KEY LOCK RONIS TYPE D	1SDA066627R1	
	MOL-D XT2-XT4 KEY LOCK RONIS DIFF. KEY	1SDA066629R1	
XT2-XT4	MOL-S XT2-XT4 KEY LOCK RONIS TYPE A	1SDA066630R1	
	MOL-S XT2-XT4 KEY LOCK RONIS TYPE B	1SDA066631R1	
	MOL-S XT2-XT4 KEY LOCK RONIS TYPE C	1SDA066632R1	
	MOL-S XT2-XT4 KEY LOCK RONIS TYPE D	1SDA066633R1	
	MOL-M XT2-XT4KEY LOCK RONIS MAN. OPER.	1SDA066634R1	
T5	MOL-D - Same Key T4-T5	1SDA054904R1	3,760
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20005) T4-T5	1SDA054905R1 ■	
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20006) T4-T5	1SDA054906R1	
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20007) T4-T5	1SDA054907R1	
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20008) T4-T5	1SDA054908R1	
T5-T6	MOL-M - Lock only on Manual Operation - Same Key T4-T5-T6	1SDA054909R1	
T6	MOL-D - Different Key T6	1SDA060611R1	
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20005) T6	1SDA060612R1	
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20006) T6	1SDA060613R1	
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20007) T6	1SDA060614R1	
	MOL-S - Same Key for Different Groups of Circuit Breakers (N. 20008) T6	1SDA060615R1	



Motor operator with direct action - MOD

Frame	Description	Ordering code	L.P.(₹)
XT1-XT3	MOD XT1-XT3 24 V dc	1SDA066457R1	24,010
	MOD XT1-XT3 48...60 V dc	1SDA066458R1	
	MOD XT1-XT3 110...125 V ac/dc	1SDA066459R1	20,640
	MOD XT1-XT3 220...250 V ac/dc	1SDA066460R1 ■	
	MOD XT1-XT3 380...440 V ac	1SDA066461R1	24,010
	MOD XT1-XT3 480...525 V ac	1SDA066462R1	


Tmax accessories



Stored Energy Motor Operator - MOE			
Frame	Description	Ordering code	L.P. (₹)
XT2-XT4	MOE XT2-XT4 24 V dc	1SDA066463R1	33,920
	MOE XT2-XT4 48...60 V dc	1SDA066464R1	
	MOE XT2-XT4 110...125 V ac/dc	1SDA066465R1	29,640
	MOE XT2-XT4 220...250 V ac/dc	1SDA066466R1 ■	
	MOE XT2-XT4 380...440 V ac	1SDA066467R1	33,920
	MOE XT2-XT4 480...525 V ac	1SDA066468R1	
T5	MOE 24 V DC T4-T5	1SDA054894R1	34,740
	MOE 48...60 V DC T4-T5	1SDA054895R1	
	MOE 110...125 V AC / DC T4-T5	1SDA054896R1	
	MOE 220...250 V AC / DC T4-T5	1SDA054897R1 ■	
	MOE 380 V AC T4-T5	1SDA054898R1	
T6	MOE 24 V DC T6	1SDA060395R1	43,090
	MOE 48...60 V DC T6	1SDA060396R1	
	MOE 110...125 V AC/DC T6	1SDA060397R1	
	MOE 220...250 V AC/DC T6	1SDA060398R1 ■	
	MOE 380 V AC T6	1SDA060399R1	



Stored energy motor operator with electronics - MOE-E			
Frame	Description	Ordering code	L.P. (₹)
XT2 - XT4	MOE-E XT2-XT4 24V dc X REM.CONTR.	1SDA066469R1	36,920
	MOE-E XT2-XT4 48...60V dc X REM.CONTR.	1SDA066470R1	
	MOE-E XT2-XT4 110...125V ac/d X REM.CONTR.	1SDA066471R1	
	MOE-E XT2-XT4 220...250V ac/dc X REM.CONTR.	1SDA066472R1	
	MOE-E XT2-XT4 380...440V ac X REM.CONTR.	1SDA066473R1	
	MOE-E XT2-XT4 480...525V ac X REM.CONTR.	1SDA066474R1	
T5	MOE-E 24 V DC T4-T5	1SDA054899R1	47,110
	MOE-E 48...60 V DC T4-T5	1SDA054900R1	
	MOE-E 110...125 V AC / DC T4-T5	1SDA054901R1	
	MOE-E 220...250 V AC / DC T4-T5	1SDA054902R1 ■	
	MOE-E 380 V AC T4-T5	1SDA054903R1	
T6	MOE-E 24 V DC T6	1SDA060400R1	57,990
	MOE-E 48...60 V DC T6	1SDA060401R1	
	MOE-E 110...125 V AC/DC T6	1SDA060402R1	
	MOE-E 220...250 V AC/DC T6	1SDA060403R1	
	MOE-E 380 V AC T6	1SDA060404R1	



Spring charging motor- M			
Frame	Description	Ordering code	L.P. (₹)
T7M	M 24...30V AC/DC T7M	1SDA062113R1	45,200
	M 48...60V AC/DC T7M	1SDA062114R1	47,570
	M 100...130V AC/DC T7M	1SDA062115R1	45,200
	M 220...250V AC/DC T7M	1SDA062116R1	
	M 380...415V AC T7M	1SDA062117R1	



High insulating terminal covers - HTC			
Frame	Description	Ordering code	L.P. (₹)
XT1...XT4	HTC XT1 3p TERMINAL COVERS HIGH 2pcs	1SDA066664R1	2,870
	HTC XT2 3p TERMINAL COVERS HIGH 2pcs	1SDA066666R1	3,260
	HTC XT3 3p TERMINAL COVERS HIGH 2pcs	1SDA066668R1	3,530
	HTC XT4 3p TERMINAL COVERS HIGH 2pcs	1SDA066670R1	3,940
	HTC XT1 4p TERMINAL COVERS HIGH 2pcs	1SDA066665R1	3,820
	HTC XT2 4p TERMINAL COVERS HIGH 2pcs	1SDA066667R1	4,320
	HTC XT3 4p TERMINAL COVERS HIGH 2pcs	1SDA066669R1	4,720
	HTC XT4 4p TERMINAL COVERS HIGH 2pcs	1SDA066671R1	5,230

■ Stock items

Tmax accessories




Low insulating terminal covers - LTC			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	LTC XT1 3p TERMINAL COVERS LOW 2pcs	1SDA066655R1	2,110
	LTC XT2 3p TERMINAL COVERS LOW 2pcs	1SDA066657R1	
	LTC XT3 3p TERMINAL COVERS LOW 2pcs	1SDA066660R1	2,230
	LTC XT4 3p TERMINAL COVERS LOW 2pcs	1SDA066662R1	
	LTC XT1 4p TERMINAL COVERS LOW 2pcs	1SDA066656R1	2,450
	LTC XT2 4p TERMINAL COVERS LOW 2pcs	1SDA066659R1	
	LTC XT3 4p TERMINAL COVERS LOW 2pcs	1SDA066661R1	2,730
	LTC XT4 4p TERMINAL COVERS LOW 2pcs	1SDA066663R1	3,120
T5	LTC 3p T5	1SDA054968R1	2,960
	LTC 4p T5	1SDA054969R1	3,870
T6	LTC 3p T6	1SDA014038R1	3,230
	LTC 4p T6	1SDA014039R1	4,280
T7-T7M	LTC 3p T7-T7M	1SDA063093R1	4,900
	LTC 4p T7-T7M	1SDA063094R1	6,270

X3 connector			
Frame	Description	Ordering code	L.P. (₹)
T5-T6	X3 Connector for fixed circuit-breaker PR222DS or PR223DS	1SDA055059R1	4,030
	X3 Connector for plug-in/withdrawable circuit-breaker	1SDA055061R1	

X4 Connector			
Frame	Description	Ordering code	L.P. (₹)
T5-T6	X4 Connector for fixed circuit-breaker	1SDA055060R1	4,030
	X4 Connector for plug-in/withdrawable circuit-breaker	1SDA055062R1	

Tmax accessories



Residual current devices			
Frame	Description	Ordering code	L.P. (₹)
XT1	RC Inst x XT1 3p F	1SDA067122R1	22,890
	RC Sel x XT1 3p F	1SDA067123R1	
	RC Sel 200 x XT1 4p F	1SDA067121R1	33,020
	RC Inst x XT1 4p F	1SDA067124R1	
	RC Sel x XT1 4p F	1SDA067125R1	
XT2	RC Sel x XT2 4p F	1SDA067126R1	48,440
	RC Inst x XT3 3p F	1SDA067127R1	56,770
XT3	RC Sel x XT3 3p F	1SDA067128R1	63,060
	RC Inst x XT3 4p F	1SDA067129R1	61,050
	RC B Type x XT3 4p F	1SDA067132R1	94,810
	RC Sel x XT3 4p F	1SDA067130R1	67,180
T5	RC222/5 4p Fixed T5	1SDA054955R1	67,180

Automation transfer switch - ATS

Automatic transfer switch			
Frame	Description	Ordering code	L.P. (₹)
XT2-XT4/ T5-T7/ E1-E6	ATS021	1SDA065523R1	92,680
	ATS022	1SDA065524R1	1,01,690

Note : ATS will be used along with either two motorized ACB or MCCBs with required interlocking and changeover base plate as per the requirement.

Mechanical interlock between circuit breakers			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	MIR-HR XT1...XT4 MECH INTERLOCK HOR. 2 CB**	1SDA066637R1	15,580
	MIR-VR XT1...XT4 MECH INTERLOCK VER. 2 CB**	1SDA066638R1	
	MIR-P PLATE x XT1 F	1SDA066639R1	5,450
	MIR-P PLATE x XT2 F	1SDA066641R1	
	MIR-P PLATE x XT3 F	1SDA066643R1	
	MIR-P PLATE x XT4 F	1SDA066645R1	

Note : ** Following must be ordered to make the rear interlock.

1. A MIR-HR or MIR-VR
2. A plate MIR-P for each circuit breaker to be interlocked

Mechanical interlock between circuit breakers - MIR - to be used with copper spreaders only			
Frame	Description	Ordering code	L.P. (₹)
T5	MIR-HB Horizontal Interlock Frame Unit T4-T5	1SDA054946R1	11,820
	MIR-VB Vertical Interlock Frame Unit T4-T5	1SDA054947R1	
	MIR-P Plate for Interlock Type D T5 400 (F-P-W) or T5 630 (F)+T5 400 (F-P-W) or T5 630 (F)	1SDA054951R1	
	MIR-P Plate for Interlock Type E T5 400 (F-P-W) or T5 630 (F) + T5 630 (P-W)	1SDA054952R1	6,100
	MIR-P Plate for Interlock Type F T5 630 (P-W) + T5 630 (P-W)	1SDA054953R1	6,100
T6	MIR-H Horizontal Mechanical Interlock T6	1SDA060685R1	18,510
	MIR-V Vertical Mechanical Interlock T6	1SDA060686R1	

Note: For interlocking in T4-T5, Order both frame and plate unit

Mechanical interlock with cables between 2 circuit breakers			
Frame	Description	Ordering code	L.P. (₹)
T7-T7M	Cable Kit for InterlockT7-T7M	1SDA062127R1	7,920
	Cable Kit for InterlockT7-T7M with E1-6	1SDA064568R1	8,590
	Plate for Interlock T7-T7M Fixed	1SDA062129R1	30,450
	Plate for Interlock T7-T7M withdrawble	1SDA062131R1	32,550

Note: It is necessary to order 2 plates and one kit of cables

Tmax accessories



Accessories for electronic trip units			
Frame	Description	Ordering code	L.P. (₹)
XT2 - XT4	EKIP LED METER x LSI-LSIG-M/LRIU XT2-XT4	1SDA068660R1	11,740
	EKIP DISPLAY x LSI-LSIG-M/LRIU XT2-XT4	1SDA068659R1	13,780
	EKIP COM x LSI-LSIG-M/LRIU XT2-XT4 F/P	1SDA068661R1	20,540
	EKIP COM x LSI-LSIG-M/LRIU XT2-XT4 W	1SDA068662R1	
	KIT x CONNECTION Vaux 24Vdc XT2-XT4 F/P	1SDA066980R1	4,440
	KIT x CONNECTION Vaux 24Vdc XT2-XT4 W	1SDA066981R1	4,990
	EKIP multimeter display on front of the switch board	1SDA074192R1	Upon request

Note:- F/P: Fixed/Plug-in ; W: Withdrawable



Test and configuration unit			
Frame	Description	Ordering code	L.P. (₹)
XT2 - XT4	Ekip TT Trip test unit	1SDA066988R1	7,010



Bracket for fixing onto DIN rail			
Frame	Description	Ordering code	L.P. (₹)
XT1	KIT DIN50022 XT1 3p PLATE DIN	1SDA066652R1	1,740
	KIT DIN50022 XT1 4p PLATE DIN	1SDA066419R1	1,850
	KIT DIN50022 XT1+RC Sel 200 PLATE DIN	1SDA067134R1	2,030
	KIT DIN50022 XT1+RC PLATE DIN	1SDA067135R1	
XT3	KIT DIN50022 XT3 3p PLATE DIN	1SDA066420R1	2,200
	KIT DIN50022 XT3 4p PLATE DIN	1SDA066421R1	
	KIT DIN50022 XT3+RC PLATE DIN	1SDA067139R1	2,420
XT2	KIT DIN50022 XT2-XT4 PLATE DIN	1SDA066653R1	1,740



IP54 Protection for transmitted rotary handle			
Frame	Description	Ordering code	L.P. (₹)
XT1....XT4	IP54 Protection for transmitted rotary handle-RHE	1SDA066587R1	2,640

Tmax conversion kit



Plug-in and drawout conversion

Frame	Pole	Type	Description	Ordering code	L.P. (₹)
XT1	3P	Plugin kit	KIT P MP XT1 3p	1SDA066276R1	4,680
			XT1 P FP 3p EF	1SDA068183R1	8,600
XT2			KIT P MP XT2 3p	1SDA066278R1	5,210
			XT2 P FP 3p EF	1SDA068187R1	9,400
XT3			KIT P MP XT3 3p	1SDA066280R1	6,480
			XT3 P FP 3p EF	1SDA068192R1	9,670
XT4			KIT P MP XT4 3p	1SDA066282R1	7,590
			XT4 P FP 3p EF	1SDA068196R1	10,470
T5	KIT MP T5 400 P 3p	1SDA054843R1	9,590		
	T5 400 P FP 3p EF	1SDA054749R1	17,300		
	KIT MP T5 630 P 3p	1SDA054847R1	11,020		
		T5 630 P FP 3p EF	1SDA054762R1	19,510	
XT2	Drawout kit	KIT W MP XT2 3p	1SDA066284R1	8,600	
		XT2 W FP 3p EF	1SDA068200R1	19,230	
XT4		KIT W MP XT4 3p	1SDA066286R1	9,810	
		XT4 W FP 3p EF	1SDA068204R1	20,190	
T5		KIT MP T5 400 W 3p	1SDA054845R1	14,650	
		T5 400 W FP 3p EF	1SDA054755R1	30,530	
		KIT MP T5 630 W 3p	1SDA054849R1	18,840	
			T5 630 W FP 3p EF	1SDA054768R1	31,640
T6	KIT MP T6 630/800 W 3p	1SDA060390R1	21,460		
	T6 W FP 3p EF	1SDA060384R1	45,080		
T7	KIT MP T7-T7M-X1 W 3p	1SDA062162R1	34,840		
	T7-X1 W FP 3p EF-EF	1SDA062045R1	73,200		

Note:

The plug-in version must be composed as follows:

- 1) Fixed circuit-breaker
- 2) Conversion kit from fixed into moving part of plug-in
- 3) Fixed part of plug-in
- 4) For T5 630 -circuit-breaker and switch-disconnector in Plug-in and withdrawable version In max = 570 A

Note:

The withdrawable version must be composed as follows:

- 1) Fixed circuit-breaker
- 2) Conversion kit from fixed into moving part of withdrawable
- 3) Fixed part of withdrawable
- 4) Front for lever operating mechanism or rotary handle or motor operator
- 5) Sliding contacts blocks if the circuit-breaker is automatic or fitted with electrical accessories (only for T7)
- 6) For T5 630 -circuit-breaker and switch-disconnector in Plug-in and withdrawable version In max = 570 A

Tmax conversion kit



Plug-in and drawout conversion

Frame	Pole	Type	Description	Ordering code	L.P. (₹)
XT1	4P	Plug-in kit	KIT P MP XT1 4p	1SDA066277R1	6,230
			XT1 P FP 4p EF	1SDA068185R1	11,740
XT2			KIT P MP XT2 4p	1SDA066279R1	6,810
			XT2 P FP 4p EF	1SDA068190R1	12,840
XT3			KIT P MP XT3 4p	1SDA066281R1	7,660
			XT3 P FP 4p EF	1SDA068194R1	13,500
XT4			KIT P MP XT4 4p	1SDA066283R1	9,940
			XT4 P FP 4p EF	1SDA068198R1	13,940
			KIT MP T5 400 P 4p	1SDA054844R1	12,950
			T5 400 P FP 4p EF	1SDA054752R1	20,660
T5			KIT MP T5 630 P 4p	1SDA054848R1	15,150
	T5 630 P FP 4p EF	1SDA054765R1	23,970		
XT2	Drawout kit	KIT W MP XT2 4p	1SDA066285R1	11,740	
		XT2 W FP 4p EF	1SDA068202R1	25,570	
XT4		KIT W MP XT4 4p	1SDA066287R1	12,840	
		XT4 W FP 4p EF	1SDA068206R1	27,020	
		KIT MP T5 400 W 4p	1SDA054846R1	20,660	
		T5 400 W FP 4p EF	1SDA054758R1	38,300	
T5		KIT MP T5 630 W 4p	1SDA054850R1	22,870	
		T5 630 W FP 4p EF	1SDA054771R1	47,120	
T6		KIT MP T6 630/800 W 4p	1SDA060391R1	26,300	
		T6 W FP 4p EF	1SDA060387R1	58,390	
T7		KIT MP T7-T7M-X1 W 4p	1SDA062163R1	40,580	
	T7-X1 W FP 4p EF-EF	1SDA062049R1	97,870		

Accessories:

Frame / Type	Description	Ordering code	L.P. (₹)
Connector	Socket-plug panel connector with 3PINS (XT1...XT4)	1SDA066409R1	1,320
	Socket-plug panel connector with 6PINS (XT1...XT4)	1SDA066410R1	2,570
	Socket-plug panel connector with 9PINS (XT1...XT4)	1SDA066411R1	3,880
	Socket-plug panel connector with 15PINS (XT1...XT4)	1SDA066412R1	6,380
	Socket-plug connector of moving part 12PINS (XT2...XT4)	1SDA066413R1	6,890
	Socket-plug connector of fixed part 12PINS (XT2...XT4)	1SDA066414R1	
	Connector 4th pole SOR-PS-SOR (XT2...XT4)	1SDA066415R1	1,310
	Connector 4th pole UVR (XT2...XT4)	1SDA066418R1	1,200
	ADP 5pin SOR-C /UVR-C T4-T5-T6 P/W	1SDA055173R1	2,230
	ADP 6pin AUX -C T4-T5-T6 P/W	1SDA054922R1 ■	1,930
	ADP 10pin MOE AUE -C T4-T5-T6 P/W	1SDA054924R1	2,450
	ADP 12pin AUX -C T4-T5-T6 P/W	1SDA054923R1	3,130
MOT T7M	LEFT SLIDING CONTAC.MP C.BR.T7-T7M-X1	1SDA062164R1	5,150
	LEFT SLIDING CONTAC.FP C.BR.T7M-X1	1SDA062167R1	7,590
SOR/SCR/UVR/AUX - T7-T7M	RIGHT SLIDING CONTAC.MP C.BR.T7-T7M-X1	1SDA062166R1	5,150
	RIGHT SLIDING CONTAC.FP C.BR.T7M-X1	1SDA062169R1	7,590
Central Block for T7-T7M	Central block - MP T7 - T7M	1SDA062165R1	5,150
	Central block - FP T7 - T7M	1SDA062168R1	7,590

■ Stock items

Tmax PV: Photovoltaic range moulded case switch disconnecter



Tmax PV is the latest T Generation product up to 1600 A/1100 V DC/1500V DC.

- IEC 60947-3 certification
- 6 different sizes: from the compact T1 (which can be mounted on DIN rail) to high-performance
- T7, available in the two versions, with lever operating mechanism and motor operator
- Rated insulation voltage up to 1150 V DC/1500V DC
- Advantages like
 - excellent performance-dimensions
 - vast and complete range of accessories for all requirements
 - complete remote control with MOE options

Rated current In (A)	Rated voltage	Description	Version / Poles	Ordering code	L.P. (₹)
160	1100 V DC	T1D/PV 160 4p F FC Cu 1100V DC	Fixed / 4p	1SDA069816R1	Upon request
200		T3D/PV 200 4p F FC Cu 1100V DC	Fixed / 4p	1SDA069822R1	
250		T4D/PV 250 4p F F 1100V DC	Fixed / 4p	1SDA069823R1	
500		T5D /PV 500 4p F F 1100V DC	Fixed / 4p	1SDA069824R1	
800		T6D/PV 800 4p F F 1100V DC	Fixed / 4p	1SDA069825R1	
1250		T7D/PV 1250 4p F F 1100V DC	Fixed / 4p	1SDA069826R1	
1250M		T7D/PV 1250 4p F F M 1100V DC	Fixed / 4p	1SDA069827R1	
1600		T7D/PV 1600 4p F F 1100V DC	Fixed / 4p	1SDA069828R1	
1600M		T7D/PV 1600 4p F F M 1100V DC	Fixed / 4p	1SDA069829R1	

Rated current In (A)	Rated voltage	Description	Version / Poles	Ordering code	L.P. (₹)
250	1500V DC	T4D/PV-E 250 4p F F 1500V DC	Fixed / 4p	1SDA073559R1	Upon request
500		T5D/PV-E 500 4p F F 1500V DC	Fixed / 4p	1SDA076898R1	
1250		T7D/PV-E 1250 4p F F M 1500V DC	Fixed / 4p	1SDA073560R1	
1600		T7D/PV-E 1600 4p F F M 1500V DC	Fixed / 4p	1SDA073561R1	
250		KIT 2JUMPER U 2+2PS T4D/PV 250	Kit jumpers	1SDA070454R1	Upon request
500		KIT 2JUMPER U 2+2PS T5D/PV-E 500	Kit jumpers	1SDA076899R1	
1250		KIT JUMPER U 2+2PS T7D/PV 1250	Kit jumpers	1SDA070429R1	
1600		KIT JUMPER U 2+2PS T7D/PV 1600	Kit jumpers	1SDA070431R1	

*For information contact our nearest sales office


*Jumper kit is compulsory to order with 1500V DC version

FORMULA DSA Moulded case circuit breaker

New low voltage moulded case circuit breakers up to 630A


General characteristics

- Conforms to IEC 60947-2
- Fixed thermal magnetic release throughout the range
- Compact dimensions
- Common range of accessories
- Available in 1P, 2P, 3P & 4 pole versions
- Line-load reversibility
- Suitable for DC application till 250Vdc
- Operation voltage till 550VAC, insulation voltage of 690VAC and impulse voltage of 6KV

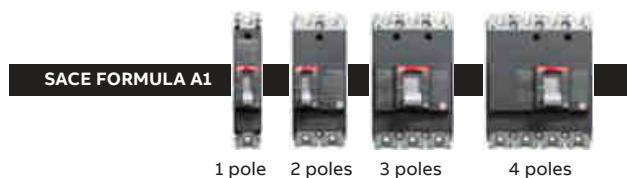

FORMULA A1

- Rated current, I_n 15...125A
- 1, 2, 3, 4 pole versions
- I_{cu} = 10, 18, 25, 36KA

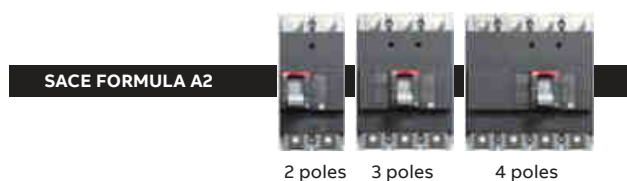

FORMULA A2


- Rated current, I_n 125...250A
- 2, 3, 4 pole versions
- I_{cu} = 18, 25, 36KA



FORMULA A3

- Rated current, I_n 320...630A
- 3, 4 pole versions
- I_{cu} = 36, 50KA

FORMULA link system

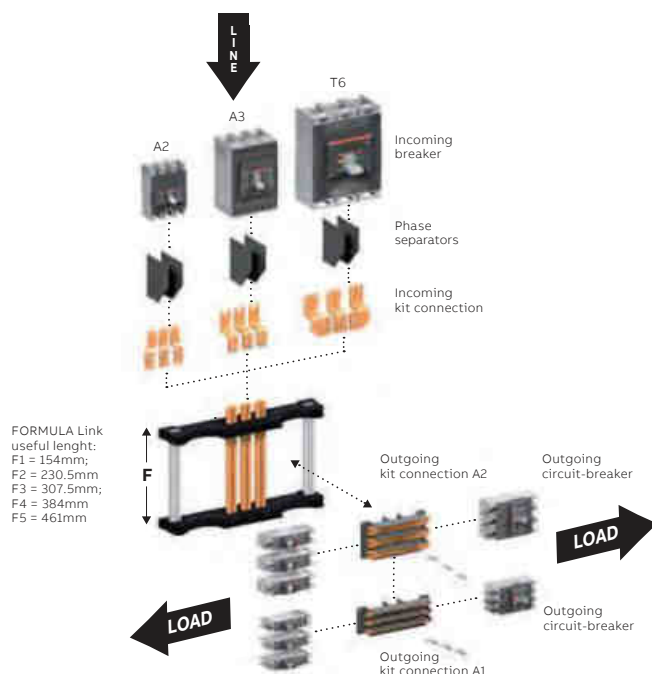

FORMULA DSA Moulded case circuit breaker

- FORMULA link in accordance with IEC 60439 Standard
- FORMULA link is a component of a power distribution system which divides the main power supply over different users
- The FORMULA link is characterised on the supply side by a main circuit-breaker which protects the whole distribution system, and on the load side by smaller sized circuit-breakers, dedicated to the individual users
- FORMULA link assembly for total discrimination between upstream and downstream devices

FORMULA link - Electrical characteristics

FORMULA link frame	[A]	250	400	630/800
Incoming breaker		A2	A3	T6
Outgoing breaker		A1	A1-A2	A1-A2
Rated operational voltage 50/60 Hz	[V]	550AC	550AC	550AC
Rated insulation voltage	[V]	690AC	690AC	690AC
Rated short time withstand current (1s)	[KA]	30	40	40



Fixed thermal and fixed magnetic MCCB

A1 125

TMF

A1A 125
Icu = 10KA

A 1B 125
Icu = 18KA

A 1C 125
Icu = 25KA

A 1N 125
Icu = 36KA

In(A)	Poles	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)	Ordering code	L.P. (₹)
25	3	1SDA066512R1 ■	3,110	1SDA066699R1	4,150	1SDA066711R1	5,010	1SDA066723R1	5,930
32		1SDA068757R1 ■		1SDA068758R1 ■		1SDA068759R1 ■		1SDA068760R1	
40		1SDA066514R1 ■		1SDA066701R1		1SDA066713R1		1SDA066725R1	
50		1SDA066515R1 ■		1SDA066702R1		1SDA066714R1		1SDA066726R1	
63		1SDA068768R1 ■		1SDA068769R1 ■		1SDA068770R1 ■		1SDA068771R1 ■	
80		1SDA066518R1 ■		1SDA066705R1		1SDA066717R1 ■		1SDA066729R1	
100		1SDA066520R1 ■		1SDA066707R1 ■		1SDA066719R1 ■		1SDA066731R1 ■	
125	4	1SDA066521R1 ■	3,670	1SDA066708R1 ■	4,760	1SDA066720R1 ■	5,330	1SDA066732R1 ■	6,230
25		1SDA066526R1		1SDA066735R1		1SDA066747R1		1SDA066759R1	
32		1SDA068761R1 ■		1SDA068762R1		1SDA068763R1 ■		1SDA068764R1	
40		1SDA066528R1		1SDA066737R1		1SDA066749R1		1SDA066761R1	
50		1SDA066529R1		1SDA066738R1		1SDA066750R1		1SDA066762R1	
63		1SDA068772R1 ■		1SDA068773R1 ■		1SDA068774R1 ■		1SDA068775R1 ■	
80		1SDA066532R1		1SDA066741R1		1SDA066753R1		1SDA066765R1	
100		1SDA066534R1 ■		1SDA066743R1 ■		1SDA066755R1 ■		1SDA066767R1 ■	
125		1SDA066535R1 ■	4,460	1SDA066744R1 ■	5,560	1SDA066756R1 ■	6,790	1SDA066768R1 ■	8,050

FORMULA DSA Moulded case circuit breaker

A2 250 TMF

In(A)	Poles
160	3
200	
250	
160	4
200	
250	

A2B 250 Icu = 18KA

Ordering code	L.P. (₹)
1SDA066549R1 ■	8,350
1SDA066551R1 ■	9,750
1SDA066553R1 ■	10,470
1SDA066555R1 ■	10,910
1SDA066557R1 ■	12,470
1SDA066559R1 ■	13,580

A2C 250 Icu = 25KA

Ordering code	L.P. (₹)
1SDA066776R1 ■	8,900
1SDA066778R1 ■	10,470
1SDA066780R1 ■	11,190
1SDA066788R1 ■	11,620
1SDA066790R1 ■	13,450
1SDA066792R1 ■	15,410

A2N 250 Icu = 36KA

Ordering code	L.P. (₹)
1SDA066782R1 ■	9,440
1SDA066784R1 ■	11,900
1SDA066786R1 ■	13,340
1SDA066794R1 ■	12,330
1SDA066796R1 ■	15,410
1SDA066798R1 ■	16,990

A3 400/630 TMF

In(A)	Poles
320	3
400	
500	
630	

A3N Icu = 36KA

Ordering code	L.P. (₹)
1SDA066560R1	28,780
1SDA066561R1	
1SDA066564R1	31,330
1SDA066566R1	37,190

A3S Icu = 50KA

Ordering code	L.P. (₹)
1SDA066562R1	31,330
1SDA066563R1	
1SDA066565R1	33,860
1SDA066567R1	41,480

A3 400/630 TMF

In(A)	Poles
320	4
400	
500	
630	

A3N Icu = 36KA

Ordering code	L.P. (₹)
1SDA066568R1	37,190
1SDA066569R1	
1SDA066572R1	40,200
1SDA066574R1	47,330

A3S Icu = 50KA

Ordering code	L.P. (₹)
1SDA066570R1	40,670
1SDA066571R1	
1SDA066573R1	43,040
1SDA066575R1	54,140

Accessories

Terminals			
Front extended spread terminal - ES	Poles	Ordering code	L.P. (₹) 6 pieces
A1	3P	1SDA082242R1 ■	530
A2		1SDA082247R1 ■	1,300

Terminals			
Front extended spread terminal - ES	Poles	Ordering code	L.P. (₹) 8 pieces
A1	4	1SDA082243R1 ■	720
A2		1SDA082248R1 ■	1,460

	Description	A1-A2	
		Ordering code	L.P. (₹)
Rotary handle	RHD - Operating mechanism direct handle	1SDA066154R1 ■	1,330
	RHE - Operating mechanism transmitted handle	1SDA066158R1 ■	1,730
	SOR-C 220...240 VAC - 220...250 VDC	1SDA066137R1	2,150
Shunt opening release – SOR-C Cabled version	SOR-C 380...440 VAC	1SDA066138R1	1,980
Auxiliary contacts – AUX-C Cabled version	AUX-C 1Q + 1SY 250 VAC/DC	1SDA066149R1 ■	1,800
Undervoltage release – UVR-C Cabled version	UVR-C 220...240 VAC - 220...250 VDC	1SDA066146R1	4,080
	UVR-C 380...440 VAC	1SDA066147R1	

■ Stock items

Switches

ABB has a wide portfolio of low voltage switches. They are suitable for diverse applications, in motor control centers, in switch boards and as main switches in various equipments and machines. From single to 8 poles and combination switches for change-over, automatic transfer, bypass, reversing, etc.

Switch disconnectors 16 – 4000 A

The switch disconnector is largely used as the main switch in low voltage switchgears for distribution of power, starting and stopping motors and isolating loads during maintenance.

The range from 16 to 125 Amps are either base plate or door mounted by snap-on or screw fitting front operated 3, 4, 6 and 8-pole are available as standard.

From 160 to 4000 Amps the switch disconnectors, also called load break switches, are designed as pole modules and they are available as 1, 2, 3 and 4-pole versions, front or side operated.

Switch disconnectors OTDC and OTDCP 10 – 1600 A

The OTDC range of switch-disconnectors is specially designed for DC applications. Thanks to a compact design, efficiency and reliability, OTDC switches bring photovoltaic installations to the next level.

Switch disconnector fuses 16 – 1250A

The switch disconnector fuse is used as the main switch in low voltage switchgears in industry for distributing power and protecting motors, cables and other devices against short circuits and over loads.

The switch disconnector fuses are available for all types of fuse links, DIN, BS, NFC, UL, CSA.

The range includes single pole to four pole versions, front-or side-operated. The pole module design enables location of the operating mechanism in any position together with the direction of the terminals giving flexibility to installation in different types of cubicle designs.

Change-over and transfer switches 16 – 3200 A

ABB's change-over and transfer switches are designed to transfer loads from one power source to another in a wide variety of applications.

The range includes switches from 16 to 3200 Amperes, which can be operated manually, remotely by using a motor or automatically.

ABB's change-over and transfer switches are tested according to IEC 60947-6-1 and IEC 60947-3 standards. The switches have ratings in AC31 and AC33 utilization categories, up to 415 V. In motorized switches, the motor operators have a wide voltage operation range.

Enclosed switches 16 – 1600 A

The ABB enclosed switches are suitable for power distribution in factories and buildings, as local motor isolators and as main switches. Each incoming supply shall be provided with a hand operated main switch-disconnector according to the Machine Directive EN 60204 and isolate reliably the electrical equipment from the supply.


ABB enclosed switches are designed and tested to meet these requirements and complies with IEC 60 947-3.

The enclosed switches are easy to install and safe to use in industrial, public and residential environments. The indication of the handle is always reliable and lockable in the OFF-position with a standard padlock. ABB's long experience in switch disconnects guarantees a long and safe use.

Auto Transfer Switches 40-4000 A

Technologies for external environment Complete range 40-4000 A. ABB offers a wide selection of automatic transfer switches (ATS). They have the features and functionality that make them suitable for diverse applications.



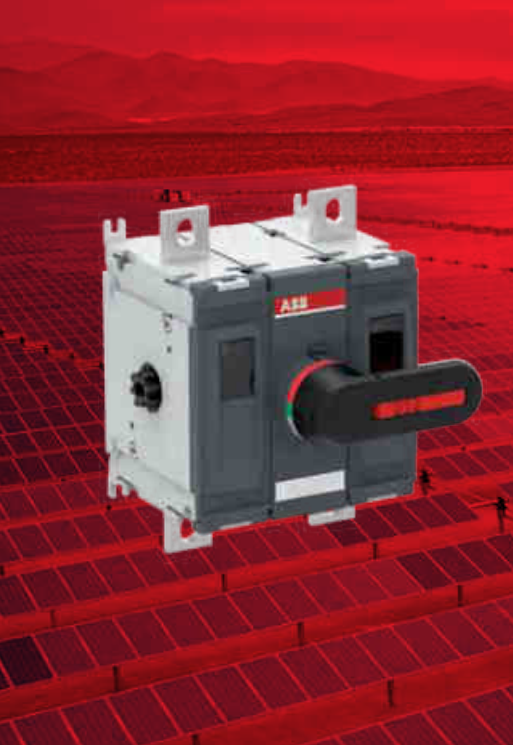

Optimized two-poles 1500V DC switch disconnectors

Small sized and with increased
efficiency and performance

A fully optimized range of two-pole DC switch-disconnectors for 1500V utility-scale photovoltaic power plants covering 315-800A current range. The new design offers both a size reduction and an increase in efficiency and performances, helping manufacturers to adapt quickly to the industry's rapid adoption of 1500V DC solutions. A switch range that allows manufacturers and utilities to improve their systems efficiency, lowering power losses and reducing the size of combiner boxes, enclosures and inverters. <https://go.abb/otdc>



DC switch disconnectors for PV application



OTDC 10...32A

- Modular design
- Simple and fast installation
- DIN rail or screw mounted
- Tunnel terminals for easy termination
- Shortcircuit bars are pre-installed as standard
- Maximum energy efficiency
- Available in plastic enclosure



OTDC 100A....1600A

- ABB offers a compact DC switch range for single and multi circuit disconnecting
- Carefully designed arc plates and dual magnetic breaking, breaking power is optimized across the entire current range
- As a result of symmetric pole design, the connections are independent of polarity. The user can make the connections in both ways
- OTDC is the only DC switch in the market that has visible contacts
- The mechanism can be located between the poles or on the side of the switch
- Special four pole versions can be made for double circuit applications
- The operation of the switch is not vulnerable to voltage peaks and it is independent of the user (quick make quick break)
- The switches are available in direct mounting handle version as well as external door mounted handle version
- The power losses are very low, results in high efficiency



Rated current In (A)	Rated voltage	Description	Ordering code	L.P. (₹)
10	1000 V DC	OTDC16F2	1SCA121454R1001	Upon request
16		OTDC16F3	1SCA121457R1001	
25		OTDC25F3	1SCA121458R1001 ■	
32		OTDC32F3	1SCA121459R1001 ■	
100		OTDC100E11K	1SCA127730R1001	
160		OTDC160E11K	1SCA127736R1001	
200		OTDC200E11K	1SCA127739R1001 ■	
250		OTDC250E11K	1SCA127742R1001 ■	
315		OTDC315F11K	1SCA158258R1001	
400		OTDC400F11K	1SCA158266R1001	
500		OTDC500F11K	1SCA158274R1001	
630		OTDC630F11K	1SCA158282R1001	
800		OTDC800F11K	1SCA158854R1001	
1000		OTDC1000E22K	1SCA143710R1001	
1250		OTDC1250E22K	1SCA143716R1001	
1600		OTDC1600E22K	1SCA143719R1001	
315	1500 V DC	OTDC315FV11K	1SCA158260R1001	Upon request
400		OTDC400FV11K	1SCA158268R1001	
500		OTDC500FV11K	1SCA158276R1001	
630		OTDC630FV11K	1SCA158284R1001	
800		OTDC800FV11K	1SCA158857R1001	

Note: The above are direct mounted handle version, we also offer door mounted handle as suffix P version of same ratings.

ONE20

Enclosed switches for residential and commercial installations

ONE20

Switches can be used as main switches or for local isolation in various applications, such as HVAC, residential water pumps and heat pumps or commercial lighting.



High quality

ABB is a synonym of quality: each ONE20 switch is tested and approved at the factory. The enclosures are made of durable materials with high UV resistance, which makes it suitable for indoor or outdoor use.

Reduced installation time

Compression glands are included in the delivery. They can be easily installed on the threaded knock-out cable entry.

Simple and modern design

The enclosure is compact and has the same size for 2, 3 and 4 pole types. ONE20 is available in three colors.

Maximized safety

The handle can be padlocked in the OFF position with up to three padlocks and in ON position with one padlock.

Features

- Available in 2-, 3- and 4-pole versions
- Thermal current (Ith) 20A
- Color options: light grey, dark grey, red-yellow
- Weather proof enclosure due to high IP class (IP67) and
- UV resistant material

Enclosed switches ONE20

Poles	Description	Ordering code	L.P. (₹)
2	ONE20M2W	1SCA138456R1001	1,070
3	ONE20M3W	1SCA138457R1001	1,600
4	ONE20M4W	1SCA138459R1001	1,880
2	ONE20M2G	1SCA135532R1001	1,080
3	ONE20M3G	1SCA135535R1001	1,600
4	ONE20M4G	1SCA135538R1001	1,880
2	ONE20M2Y	1SCA135533R1001	1,080
3	ONE20M3Y	1SCA135536R1001	1,600
4	ONE20M4Y	1SCA135540R1001	1,880

Fusegear

Easyline - XLP

Fuse Switch Disconnecter 1, 2, 3 & 4P for both AC and DC application 160...630A

All units are applicable for AC voltage, and the 1-pole and 2-pole range are also rated for DC voltage. In addition to be used as single apparatus, the 3-pole range from size 00 to size 3 (160A - 630A) are also designed to be used in distribution systems by use of a busbar adapter for easy installation. The busbar adapters are available for 40 mm, and 60 mm distance in-between centre of the phases for each busbar



systems. The whole EasyLine range got a sturdy, uniform design that is operator friendly and safe with IP 30 from front in closed position and IP 20 in open position. EasyLine Fuse Switch Disconnecters are developed and type tested according to IEC60947-3 and based on a long history, going back to 1958 when we successfully introduced the manually dependent operated LHB.



Features

- All the XLP cable terminals can be delivered with integrated bolts for cable lugs or with integrated bridge clamps (BC) for easy direct cable connection
- Typetested according to EN60947-3
- Easy to recycle/EN14001 standards
- Quick-make operation device
- Integrated IP20 cable termination
- IP30 degree of protection from the front
- Replacement compatible to similar types in the market
- Voltage measuring from the front
- V-0 plastic materials

Advantages

- Easy to install
- Easy to operate
- Sturdy design
- High personal safety
- Wide range of cable terminals and snap-on accessories
- Compact, add-on Electronic Fuse Monitoring (EFM)
- Busbar adapters

Applications

- UPS: Uninterruptible Power Supply, used for the power supply for computer/servers, storage devices, communication network systems, industry control systems, etc.
- Telecom power supplies
- General protection in smaller distribution panels using 1-pole or 2-pole configurations AC or DC

Fusegear - Fuse switch disconnecter

Description	Ordering code	L.P. (₹)
XLP000-6CC	1SEP201428R0001	3,970
XLP00-6BC	1SEP101890R0002	5,110
XLP1-6BC	1SEP101891R0002	13,060
XLP2-6BC	1SEP101892R0002	20,440
XLP3-6BC	1SEP101975R0002	33,500

Fusegear

InLine II - ZLBM/ZHBM

Designed for the future

ABB is proud to introduce the latest technology of Fuse Switch Disconnectors to ensure the best stability and highest safety in the power distribution network.

The new generation InLine II also offers the highest level of personal safety during operation and service.



Features

- Available as 160A, 250A, 400A, 630A, 800 and 1250A types in combination with NH/DIN HRC Fuse Links acc. to EN/IEC 60269
- Type tested in accordance to EN/IEC 60947-3
- 1 - pole and 3 - pole variants
- For vertical and horizontal installations
- Designed for 185 mm busbar distance
- IP30 degree of protection from the front
 - Padlocking in open and closed position at the 3 - pole version
 - Padlocking in closed position at the 1 - pole version
- Park position with possible padlocking at the 1 - pole type
- Sealing solutions
- Wide range of accessories and cable terminal connections
- Compatible dimensions to equivalent products in the market

Advantages

- High level of personal safety by:
 - Safe and reliable operation ON/OFF
 - Safe and simple replacement of the NH fuse links

- Universal terminal bolts offering standing bolt or fixed nut for high flexibility of cable connections
- Variants with integrated V-clamps
- Available in two alternative depths (ZLBM/ZHBM), L-version (ZLBM) will save space in Cable Distribution Cabinets by offering reduced depth
- Easy installation of current transformers in the H-version (ZHBM)
- Variants with non corrosive steel materials (stainless steel)
- Designed for intelligent communication to support a high level of stability in the power distribution network

Applications

- Cable Distribution Cabinets (CDC)
- Low voltage distribution in compact secondary substations (CSS)
- Distribution boards for industry, housing and office buildings
- Installations

Vertical Fuse Switch Disconnectors

InLine II - ZLBM/ZHBM



ZLBM - 1-pole, Depth 121 mm

Type	Ie [A]	Description	Order code	L.P. (₹)
Basic versions				
ZLBM00-1P-M8	160	3 x M8 Bolts	1SEP620010R1000	Upon request
ZLBM00-1P-V	160	3 x V-Clamps	1SEP620010R1020	
ZLBM1-1P-M12	250	3 x M12 Universal Bolts	1SEP620011R1000	
ZLBM1-1P-V	250	3 x V-Clamps	1SEP620011R1020	
ZLBM2-1P-M12	400	3 x M12 Universal Bolts	1SEP620012R1000	
ZLBM2-1P-V	400	3 x V-Clamps	1SEP620012R1020	
ZLBM3-1P-M12	630	3 x M12 Universal Bolts	1SEP620013R1000	
ZLBM3-1P-V	630	3 x V-Clamps	1SEP620013R1020	
ZLBM800A-1P-M12	800	12 x M12 Universal Bolts	1SEP620014R1000	
ZLBM910A-1P-M12	910	2 x 3 M12 bolts	1SEP620053R1000	
ZLBM910A-1P-M12-MB	910	2 x 3 M12 bolts, connection on rear side	1SEP620053R1050	
Long terminal cover, 3U shaped busbar versions				
ZLBM00-1P-3U-M8	160	3 x M8 Bolts	1SEP620170R1200	Upon request
ZLBM1-L-1P-3U-M12	250	3 x M12 Universal Bolts	1SEP620171R1200	
ZLBM2-L-1P-3U-M12	400	3 x M12 Universal Bolts	1SEP620172R1200	
ZLBM3-L-1P-3U-M12	630	3 x M12 Universal Bolts	1SEP620173R1200	




ZLBM - 3-pole, Depth 121 mm

Type	Ie [A]	Description	Order code	L.P. (₹)
ZLBM00 3-pole, 100 mm busbar distance. Cable shroud included.				
ZLBM00-100-3P-M8	160	3 x M8 Bolt	1SEP620150R3000	Upon request
Basic versions				
ZLBM00-3P-M8	160	3 x M8 Bolts	1SEP620010R3000	
ZLBM00-3P-V	160	3 x V-Clamps	1SEP620010R3020	
ZLBM1-3P-M12	250	3 x M12 Universal Bolt	1SEP620011R3000	
ZLBM1-3P-V	250	3 x V-Clamps	1SEP620011R3020	
ZLBM2-3P-M12	400	3 x M12 Universal Bolt	1SEP620012R3000	
ZLBM2-3P-V	400	3 x V-Clamps	1SEP620012R3020	
ZLBM3-3P-M12	630	3 x M12 Universal Bolt	1SEP620013R3000	
ZLBM3-3P-V	630	3 x V-Clamps	1SEP620013R3020	
ZLBM800A-3P-M12	800	12 x M12 Universal Bolts	1SEP620014R3000	
ZLBM800A-3P-V	800	12 x V-Clamps	1SEP620014R3020	
ZLBM910A-3P-M12	910	2 x 3 M12 bolts	1SEP620053R3000	Upon request
ZLBM910A-3P-M12-MB	910	2 x 3 M12 bolts, connection on rear side	1SEP620053R3050	
ZLBM1250A-3P-M12	1250	12 x M12 Universal Bolt	1SEP620015R3000	
ZLBM1250A-3P-V	1250	12 x V-Clamps	1SEP620015R3020	
Without V-Clamps				
ZLBM00-3P-NOV	160	Without V-Clamps	1SEP620010R3010	Upon request
ZLBM1-3P-NOV	250	Without V-Clamps	1SEP620011R3010	
ZLBM2-3P-NOV	400	Without V-Clamps	1SEP620012R3010	
ZLBM3-3P-NOV	630	Without V-Clamps	1SEP620013R3010	
Long terminal cover, 3U shaped busbar versions				
ZLBM00-3P-3U-M8	160	3 x M8 Bolts	1SEP620170R3200	Upon request
ZLBM1-L-3P-3U-M12	250	3 x M12 Universal Bolts	1SEP620171R3200	
ZLBM2-L-3P-3U-M12	400	3 x M12 Universal Bolts	1SEP620172R3200	
ZLBM3-L-3P-3U-M12	630	3 x M12 Universal Bolts	1SEP620173R3200	

OFAF HRC fuse links and base, DIN-type

DIN -type fuse links, gG, 500 V, 80 kA

The ordering code includes one fuse link, the delivery batch is according to the column.

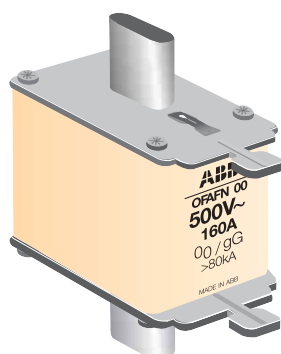

Fuse size	Rated current In (A)	Description	Delivery batch [pcs]	Ordering code	L.P. (₹)
000	2	OFAFN000GG2	6	1SCA107747R1001 ■	230
	6	OFAFN000GG6	6	1SCA107748R1001 ■	
	10	OFAFN000GG10	6	1SCA107749R1001 ■	
	16	OFAFN000GG16	6	1SCA107750R1001 ■	
	20	OFAFN000GG20	6	1SCA107751R1001 ■	
	25	OFAFN000GG25	6	1SCA107751R1002 ■	
	32	OFAFN000GG32	6	1SCA107752R1001 ■	
	63	OFAFN000GG63	6	1SCA107753R1001 ■	
00	6	OFAFN00GG6	6	1SCA107754R1001	530
	10	OFAFN00GG10	6	1SCA107755R1001	
	16	OFAFN00GG16	6	1SCA107756R1001	
	20	OFAFN00GG20	6	1SCA107757R1001	
	25	OFAFN00GG25	6	1SCA107758R1001	
	32	OFAFN00GG32	6	1SCA107759R1001 ■	
	50	OFAFN00GG50	6	1SCA107760R1001 ■	
	63	OFAFN00GG63	6	1SCA107761R1001 ■	
	80	OFAFN00GG80	6	1SCA107762R1001 ■	
	100	OFAFN00GG100	6	1SCA107763R1001 ■	
	125	OFAFN00GG125	6	1SCA107764R1001 ■	
0	160	OFAFN00GG160	6	1SCA107765R1001 ■	1,030
	160	OFAFOH160	3	1SCA022627R3170	
	200	OFAFOH200	3	1SCA022629R5140 ■	
1	32	OFAFN1GG32	6	1SCA107766R1001	770
	50	OFAFN1GG50	6	1SCA107767R1001	
	63	OFAFN1GG63	6	1SCA107768R1001	
	80	OFAFN1GG80	6	1SCA107769R1001	
	100	OFAFN1GG100	6	1SCA107770R1001	
	125	OFAFN1GG125	6	1SCA107771R1001	
	160	OFAFN1GG160	6	1SCA107772R1001 ■	
	200	OFAFN1GG200	3	1SCA107773R1001 ■	
	250	OFAFN1GG250	3	1SCA107774R1001 ■	
	100	OFAFN2GG100	3	1SCA107775R1001	1,130
2	125	OFAFN2GG125	3	1SCA107776R1001	
	250	OFAFN2GG250	3	1SCA107778R1001	
	315	OFAFN2GG315	3	1SCA107779R1001 ■	
3	400	OFAFN2GG400	3	1SCA107780R1001 ■	1,750
	315	OFAFN3GG315	3	1SCA107781R1001	
	500	OFAFN3GG500	3	1SCA107783R1001 ■	
	630	OFAFN3GG630	3	1SCA107784R1001 ■	
	800	OFAFN3GG800	3	1SCA107785R1001 ■	
4	1250	OFAF4H1250	1	1SCA022627R7830	Upon request
4a	1250	OFAF4AH1250	1	1SCA022637R4360	



Fuse size	Rated current In (A)	Description	Ordering code	L.P. (₹)
00	160	Fuse Base - Din type	1SCA833001R2001 ■	440
1	250		1SCA833001R2002 ■	890
2	400		1SCA833001R2003 ■	1,520
3	630		1SCA833001R2004 ■	2,030

■ Stock items

OFF HRC fuse links and base, BS-type

BS -type fuse links, gG, 415 V, 80 kA

The type code includes one fuse link, but the delivery batch is according to the column.



Fuse size	Rated current In [A]	Description	Delivery batch [pcs]	Ordering code	L.P. (₹)
Offset blade tag fuse link					
F1	2	OFFNF1GG2	10	1SCA107786R1001 ■	80
	4	OFFNF1GG4	10	1SCA107787R1001 ■	
	6	OFFNF1GG6	10	1SCA107788R1001 ■	
	10	OFFNF1GG10	10	1SCA107789R1001 ■	
	16	OFFNF1GG16	10	1SCA107790R1001 ■	
	20	OFFNF1GG20	10	1SCA107791R1001 ■	
	25	OFFNF1GG25	10	1SCA107792R1001 ■	90
32	OFFNF1GG32	10	1SCA107793R1001 ■		
Offset bolted tag fuse link					
A2	6	OFFNA2GG6	10	1SCA107795R1001	110
	10	OFFNA2GG10	10	1SCA107796R1001	
	16	OFFNA2GG16	10	1SCA107798R1001	
	20	OFFNA2GG20	10	1SCA107827R1001	
	25	OFFNA2GG25	10	1SCA107800R1001	
	32	OFFNA2GG32	10	1SCA107801R1001 ■	
A3	40	OFFNA3GG40	10	1SCA107803R1001 ■	140
	50	OFFNA3GG50	10	1SCA107804R1001	
	63	OFFNA3GG63	10	1SCA107805R1001 ■	
A4	50	OFFNA4GG50	10	1SCA107806R1001	290
	63	OFFNA4GG63	10	1SCA107807R1001	
	80	OFFNA4GG80	10	1SCA107808R1001	
	100	OFFNA4GG100	10	1SCA107809R1001 ■	
	125	OFFNA4GG125	10	1SCA107810R1001 ■	
Central bolted tag fuse link					
B1	50	OFFNB1GG50	10	1SCA107811R1001	340
	63	OFFNB1GG63	10	1SCA107812R1001	
	80	OFFNB1GG80	10	1SCA107813R1001	
	100	OFFNB1GG100	10	1SCA107814R1001	
B2	125	OFFNB2GG125	10	1SCA107816R1001	520
	160	OFFNB2GG160	5	1SCA107817R1001 ■	
	200	OFFNB2GG200	5	1SCA107818R1001 ■	
B3	250	OFFNB3GG250	1	1SCA107819R1001 ■	740
	315	OFFNB3GG315	1	1SCA107820R1001	800
B4	400	OFFNB4GG400	1	1SCA107822R1001	1,310
C1	400	OFFNC1GG400	1	1SCA107823R1001	1,990
C2	500	OFFNC2GG500	1	1SCA107824R1001	2,250
C2	630	OFFNC2GG630	1	1SCA107825R1001	2,250
C3	800	OFFNC3GG800	1	1SCA107826R1001	2,840



Fuse size	Rated current In [A]	Description	Delivery batch [pcs]	Ordering code	L.P. (₹)
F1	20	Control Fuse	100	1SYN833001R2005 ■	150
	32	Base	100	1SYN833001R2009 ■	180

OESA/OS switch disconnecter fuse, DIN-type

DIN type

32 - 800A SDF supplied with shaft and handle, Mechanism at the end of the switch fuse



Notes:
4th pole of all SFU's are 100% rated and are in the switched neutral (SN) version.

Contact our nearest sales office

- For mechanism inbetween poles configuration
- For motorized switch disconnecter fuse requirement
- For 4th pole with fuse protection
- For Switch disconnecter fuse with direct mounting handle

Rated current In [A]	Poles	Recommend Fuse size	Description	Ordering code	L.P. (₹)
32	2	000/ 00	OESA0032D2	1SCA022108R4330	2,250
63			OESA0063D2	1SCA022080R5470	2,800
100			OESA00100D2	1SCA022080R5210	5,410
125		00	OESA125D2	1SYN833039R2012	7,230
160			OESA00160D2	1SCA022108R4500	7,730
200			OS200D02P	1SCA022759R9220	9,950
250		0-1	OS250D02P	1SCA022760R0170	12,390
315		0-2	OS315D02P	1SYN833040R2012	16,460
400			OS400D02P	1SCA022811R2740	18,490
630		3	OS630D02P	1SCA107745R1001	31,480
800			OS800D02P	1SCA022837R2650	35,730
1250		4	OS1250D02P	1SCA114051R1001	Upon request
32	3	000/ 00	OESA00-32	1SCA022058R7710 ■	2,470
63			OESA 00-63	1SCA022057R6850 ■	3,390
100			OESA00100	1SCA022025R7830 ■	6,510
125		00	OESA 00125	OESA00125 ■	8,730
160			OESA00-160	1SCA022077R8130 ■	9,349
200			OS200D03P	1SYN022709R9500 ■	12,040
250		0-1	OS250D03P	1SYN022719R0090	14,980
315		0-2	OS315D03P	1SYN953046P3001 ■	19,900
400			OS400D03P	1SYN022719R0250 ■	22,370
630		3	OS630D03P	1SYN022825R2830 ■	38,070
800			OS800D03P	1SYN022825R4880 ■	40,520
1250		4	OS1250D03P	1SCA105475R1001	Upon request
32	TPN	000/ 00	OESA0032N ■	OESA0032N	2,590
63			OESA0063N ■	OESA0063N	3,500
100			OESA00100N ■	OESA00100N	6,880
125		00	OESA00125N ■	OESA00125N	9,220
160			OESA00160N ■	OESA00160N	10,320
200			OS200D03N3P	1SYN022749R8710 ■	13,030
250		0-1	OS250D03N3P	1SYN022749R9430 ■	15,730
315		0-2	OS315D03N3P	1SYN953047P3001 ■	21,120
400			OS400D03N3P	1SYN022753R9320 ■	23,330
630		3	OS630D03N3P	1SYN100858R1001 ■	38,670
800			OS800D03N3P	1SYN100859R1001 ■	41,750
1250		4	OS1250D03N3P	1SCA107932R1001	Upon request
32	4	000/ 00	OESA 00-32A4	1SCA022067R7610	2,830
63			OESA 00-63A4	1SCA022057R7740 ■	3,690
100			OESA00100A4	1SCA022043R6760	7,140
125		00	OESA00125A4	OESA00125A4	9,820
160			OESA 00-160A4	1SCA022080R7840	11,050
200			OS200D04N2P	1SYN022709R9680	14,250
250		0-1	OS250D04N2P	1SYN022719R2380	16,710
315		0-2	OS315D04N2P	1SYN953048P3001 ■	23,950
400			OS400D04N2P	1SYN022719R2460 ■	25,780
630		3	OS630D04N2P	1SYN022825R4290 ■	41,270
800			OS800D04N2P	1SYN022825R5180 ■	46,850
1250		4	OS1250D04N2P	1SCA105248R1001	Upon request

■ Stock items

OESA/OS switch disconnecter fuse, BS-type

BS

32 - 800A SDF supplied with shaft and handle

Mechanism at the end of the switch fuse



Note:
4th pole of all SFU's are 100% rated and are in the switched neutral (SN) version.

- Contact our nearest sales office
- For 1250A switch disconnecter fuse requirement
 - For mechanism in between poles configuration
 - For motorized switch disconnecter fuse requirement
 - For 4th pole with fuse protection

Rated current In [A]	Poles	Recommend Fuse size	Description	Ordering code	L.P. (₹)
32	2	A2	OESA32G2	1SCA022108R6110	1,990
63		A3	OESA63G2	1SCA022108R6380	2,720
100		A4	OESA100G2	1SCA022087R7970	5,290
125			OESA125G2	1SYN833038R2012	6,710
160		B2	OESA160B2	1SCA022082R6550	7,320
200		B1-B2	OS200B02P	1SCA022769R7820	8,840
250		B1-B3	OS250B02P	1SCA022769R9440	11,270
315		B1-B4	OS315B02P	1SCA022817R3450	16,360
400			OS400B02P	1SCA022813R7220	16,650
630		C1-C2	OS630B02P	1SCA113529R1001	28,930
800		C1-C3	OS800B02P	1SCA022837R6480	34,540
1250		D1	OS1250B02P	1SCA114070R1001	Upon request
32	3	A2	OESA32G1	1SCA022057R1540	2,400
63		A3	OESA63G1	1SCA022057R0310 ■	3,270
100		A4	OESA100G1	1SCA022042R0920 ■	6,400
125			OESA125G1	OESA125G1	8,120
160		B2	OESA160B3	1SCA022076R9570	8,840
200		B1-B2	OS200B03P	1SYN022709R9330	10,690
250		B1-B3	OS250B03P	1SYN022750R6660	13,640
315		B1-B4	OS315B03P	1SYN022719R0680	19,780
400			OS400B03P	1SYN022719R0840	20,150
630		C1-C2	OS630B03P	1SYN022825R5850	35,000
800		C1-C3	OS800B03P	1SYN022825R7550	41,750
1250		D1	OS1250B03P	1SCA105250R1001	Upon request
32	TPN	A2	OESA32G1N ■	OESA32G1N ■	2,530
63		A3	OESA63G1N ■	OESA63G1N ■	3,390
100		A4	OESA100G1N ■	OESA100G1N ■	6,760
125			OESA125G1N ■	OESA125G1N ■	8,350
160		B2	OESA160B3N ■	OESA160B3N	9,110
200		B1-B2	OS200B03N3P	1SYN022750R0620 ■	11,440
250		B1-B3	OS250B03N3P	1SYN022750R8010 ■	14,750
315		B1-B4	OS315B03N3P	1SYN022753R8940	20,270
400			OS400B03N3P	1SYN022753R9160	21,260
630		C1-C2	OS630B03N3P	1SYN100860R1001	35,610
800		C1-C3	OS800B03N3P	1SYN100861R1001	39,890
1250		D1	OS1250B03N3P	1SCA107936R1001	Upon request
32	4	A2	OESA32G4	1SCA022059R9040	2,900
63		A3	OESA63G4	1SCA022057R1110	3,690
100		A4	OESA100G4	1SCA022043R7570	7,980
125			OESA125G4 ■	OESA125G4	9,820
160		B2	OESA160B4	1SCA022080R3690	11,050
200		B1-B2	OS200B04N2P	1SYN022709R9410	14,370
250		B1-B3	OS250B04N2P	1SYN022750R7800	16,950
315		B1-B4	OS315B04N2P	1SYN022719R2710	24,310
400			OS400B04N2P	1SYN022719R2890	24,560
630		C1-C2	OS630B04N2P	1SYN022825R6230	42,360
800		C1-C3	OS800B04N2P	1SYN022825R8010	48,510
1250		D1	OS1250B04N2P	1SCA105469R1001	Upon request

■ Stock items

Accessories for OESA/OS switch disconnecter fuse, 32..800 A



Phase barriers

Frame	Pole	Height (mm)	Description	Ordering code	L.P. (₹)
OS200...400	3	100	PB100 low	1SDA054970R1 ■	1,030
	4	100	PB100 low	1SDA054971R1 ■	1,490



Auxiliary contacts

Frame	Contact function	Description	Ordering Code	L.P. (₹)
OESA 32...160	1NO+1NC	OESAZX 15	OESAZX 15	550
	2NO+2NC	OESAZX 16	OESAZX 16	1,070
OS200...800	1NO	OA1G10	1SCA022353R4970	580
	1NC	OA3G01	1SCA022456R7410	640
Screw mounting to the left side of the switch		OEA28	1SCA022714R8810 ■	760

Note: OEA 28 has to be order along with 200 & 250A TPN switch only



Fuse monitor

Frame	Rated voltage [Vac]	Description	Ordering code	L.P. (₹)
OS200...800	100...260	OFS260	1SCA022716R0180	7,930
	380...690	OFS690	1SCA022715R9920	8,130



Wrapped neutral link

Frame	Description	Ordering code	L.P. (₹)
OESA32...63	OESAZX87	OESAZX 87	500
OESA100	OESAZX 86/1	OESAZX 86/1	890
OESA125...160	OESAZX86	OESAZX 86	980
OS200...250	OXN250	1SCA022752R9950	4,510
OS315...400	OXN400	1SCA022770R3060	11,810
OS630...800	OXN800S	1SCA022831R4880	13,530

Handle adaptor

OHB145...OHB175	OHBZX200	1SCA125960R1001	1,400
-----------------	----------	-----------------	-------

Handles

Frame	Description	Ordering code	L.P. (₹)
OESA32...63	YASDB51	YASDB 51	820
OESA100...160	YASDB10	YASDB 10	1,230
OS200...250	OHB80J6	1SCA022381R0240 ■	1,690
OS315...400	OHB145J12	1SCA022381R2110	2,070
OS630...800	OHB175J12	1SCA022381R2450	2,460

Shaft

Frame	Description	Ordering code	L.P. (₹)
OESA/OS32...250	OXP6X210	1SCA022295R6080	430
OS315...400	OXP12X250	1SCA022325R6980	850
OS630...800	OXP12X280	1SCA022137R5140	1,100

Fuse covers for OESA switch disconnecter fuse

Frame	Type	Description	Ordering code	L.P. (₹)
32...63	DIN	Fuse cover	1SYN833035R2012	80
32...63	BS		1SYN833036R2012	80
100...160	DIN		1SYN833037R2012	90

Note: Ordering code mentioned above for fuse cover is per piece

OT switch disconnectors



Front operated switch-disconnectors with direct knob type handle

Rated current In [A]	Pole	Description	Ordering code	L.P. (₹)
16	3	OT16F3	1SCA104811R1001	1,220
25		OT25F3	1SCA104857R1001 ■	1,280
40		OT40F3	1SCA104902R1001	1,450
63		OT63F3	1SCA105332R1001	1,560
80		OT80F3	1SCA105798R1001	3,120
100		OT100F3	1SCA105004R1001	4,290
125		OT125F3	1SCA105033R1001	4,390

Front operated switch-disconnectors with direct knob type handle

Rated current In [A]	Pole	Description	Ordering code	L.P. (₹)
16	4	OT16F4N2	1SCA104829R1001	1,530
25		OT25F4N2	1SCA104886R1001	1,590
40		OT40F4N2	1SCA104932R1001	1,810
63		OT63F4N2	1SCA105365R1001	2,110
80		OT80F4N2	1SCA105413R1001	3,900
100		OT100F4N2	1SCA105018R1001	5,360
125		OT125F4N2	1SCA105051R1001	5,490

Door mounted switch-disconnectors with snap on and screw type mounting Handle for screw and snap on mouting to be ordered seperately



Rated current In [A]	Pole	Description	Ordering code	L.P. (₹)
16	3	OT16FT3	1SCA104838R1001 ■	1,340
25		OT25FT3	1SCA104884R1001	1,670
40		OT40FT3	1SCA104940R1001 ■	2,010
63		OT63FT3	1SCA105382R1001	2,780
80		OT80FT3	1SCA105431R1001	3,430
100		OT100FT3	1SCA105023R1001	5,720
125		OT125FT3	1SCA105060R1001	7,310

Door mounted switch-disconnectors with snap on and screw type mounting Handle for screw and snap on mouting to be ordered seperately

Rated current In [A]	Pole	Description	Ordering code	L.P. (₹)
16	4	OT16FT4N2	1SCA105711R1001	1,680
25		OT25FT4N2	1SCA104900R1001	2,090
40		OT40FT4N2	1SCA104956R1001	2,510
63		OT63FT4N2	1SCA105393R1001	3,480
80		OT80FT4N2	1SCA105499R1001	4,290
100		OT100FT4N2	1SCA105031R1001	7,150
125		OT125FT4N2	1SCA105066R1001	9,140

OT switch disconnector accessories 16..125 A

Accessories for OT 16..125 F

Selector handles for base and DIN-rail mounted switches

For shaft diameter 6 mm, door drilling 22.5 mm. Indication I-O and ON-OFF

IP65 handles, NEMA 1, 3R, 12

Padlockable with max. 3 padlocks with bail diameter 5...8 mm, defeatable door interlock in ON-position, door interlocking in OFF-position when padlocked

Frame	Description	Ordering code	L.P. (₹)
OT16...125F- Black	OHBS2AJ	1SCA105213R1001	640
OT16...125F-Red-yellow	OHYS2AJ	1SCA105296R1001	770

Shafts

Suitable for all the switches in this section, OT16...125F

Frame	Description	Ordering code	L.P. (₹)
OT16...125F	OX56X130	1SCA101655R1001 ■	430

Accessories for OT 16..125 FT

Selector handles for door mounted switches

Indication I-O and ON-OFF. No separate shaft needed

Screw mounting, hole distance 36 mm

Padlockable with max. 3 padlocks, IP65, hole distance 36/48 mm, NEMA 1, 3R, 12

Frame	Description	Ordering code	L.P. (₹)
OT16...125FT- Black	OHBS2RJ	1SCA105232R1001	740
OT16...125FT- Red Yellow	OHYS2RJ	1SCA105323R1001	760

Note:

For any different arrangement kindly contact our nearest sales office.

OT switch disconnectors

Front operated switch-disconnectors

OT 16A-3150A switch disconnector supplied with extended shaft and IP 65 pistol type handle



Contact our nearest sales office

- For Door mounted switch disconnector
- For different configuration of Shaft and Handle (selector type)
- For 6 & 8 pole switch disconnector requirement
- 1 pole switch disconnector also available on request



Note:

Contact our nearest sales office

- For requirement of motorized isolators
- For mechanism in between poles configuration
- For switch disconnector with direct mounted handle
- For side operated switches

Rated current In [A]	Poles	Description	Ordering code	L.P. (₹)
160	2	OT160EV02P	1SCA120508R1001	6,690
200		OT200E02P	1SCA022751R1400	7,110
250		OT250E02P	1SCA022735R2500	8,770
315		OT315E02P	1SCA022866R5590	10,090
400		OT400E02P	1SCA022741R7210	13,600
630		OT630E02P	1SCA022866R5670	17,050
800		OT800E02P	1SCA022835R4830	21,060
1000		OT1000E02P	1SCA105795R1001	43,840
1250		OT1250E02P	1SCA106136R1001	52,620
1600		OT1600E02P	1SCA106142R1001	70,140
2000	3	OT2000E02P	1SCA120025R1001	87,680
2500		OT2500E02P	1SCA113956R1001	1,09,610
3200		OT3200E02P	1SCA128581R1001	1,57,840
4000		OT4000E02P	1SCA128595R1001	1,84,150
16		OT16F3	1SYN104811R1001 ■	2,390
25		OT25F3	1SYN104857R1001 ■	2,420
40		OT40F3	1SYN104902R1001 ■	2,510
63		OT63F3	1SYN105332R1001 ■	2,540
80		OT80F3	1SYN105798R1001 ■	4,090
100		OT100F3	1SYN105004R1001 ■	5,460
125	3	OT125F3	1SYN105033R1001 ■	5,560
160		OT160G03P	1SCA135139R1001	7,060
160		OT160EV03P	1SCA120514R1001 ■	7,420
200		OT200E03P	1SCA022712R0800 ■	8,290
250		OT250E03P	1SCA022710R0100 ■	10,220
315		OT315E03P	1SCA022718R8510 ■	11,210
400		OT400E03P	1SCA022718R8780 ■	15,110
630		OT630E03P	1SCA022718R8940 ■	18,720
800		OT800E03P	1SCA022718R9410 ■	23,390
1000		OT1000E03P	1SCA022860R5930 ■	45,790
1250	3	OT1250E03P	1SCA022860R6230 ■	58,460
1600		OT1600E03P	1SCA022860R6580 ■	77,940
2000		OT2000E03P	1SCA108036R1001	95,490
2500		OT2500E03P	1SCA104972R1001 ■	1,21,780
3200		OT3200E03P	1SCA128481R1001	1,75,370
4000		OT4000E03P	1SCA124848R1001	2,04,590
16	4	OT16F4N2	1SYN104829R1001	2,580
25		OT25F4N2	1SYN104886R1001	2,680
40		OT40F4N2	1SYN104932R1001 ■	2,740
63		OT63F4N2	1SYN105365R1001	3,130
80		OT80F4N2	1SYN105413R1001 ■	5,370
100		OT100F4N2	1SYN105018R1001 ■	5,670
125		OT125F4N2	1SYN105051R1001 ■	5,850
160		OT160G04P	1SCA135140R1001	9,690
160		OT160EV04P	1SCA120521R1001 ■	10,220
200		OT200E04P	1SCA022713R4930 ■	10,440
250	4	OT250E04P	1SCA022710R0520 ■	11,690
315		OT315E04P	1SCA022719R1730 ■	12,670
400		OT400E04P	1SCA022719R1810 ■	16,280
630		OT630E04P	1SCA022719R2030 ■	22,230
800		OT800E04P	1SCA022719R2110 ■	26,790
1000		OT1000E04P	1SCA022860R6150	60,400
1250		OT1250E04P	1SCA022860R6310	75,990
1600		OT1600E04P	1SCA022860R6740	97,430
2000		OT2000E04P	1SCA108038R1001	1,14,970
2500		OT2500E04P	1SCA105140R1001	1,41,280
3200	4	OT3200E04P	1SCA128482R1001	1,89,990
4000		OT4000E04P	1SCA124856R1001	2,14,350


■ Stock items

OT switch disconnecter accessories



Handles

Frame	Description	Ordering code	L.P. (₹)
OT16...125	OHB45J6	1SCA022380R8770 ■	990
OT160...250	OHB65J6	1SCA022380R9660 ■	1,340
OT315...400	OHB95J12	1SCA022381R0830	1,550
OT630...800	OHB125J12	1SCA022381R1560 ■	1,670
OT1000...4000	OHB274J12	1SCA115920R1001 ■	4,760




Shaft

Frame	Description	Ordering code	L.P. (₹)
OT16...125	OXp6X170	1SCA108224R1001 ■	360
OT160...250	OXp6X210	1SCA022295R6080	420
OT315...800	OXp12X185	1SCA022325R6710	670
OT1000...4000	OXp12X280	1SCA022137R5140	1,100



Auxiliary contact

Frame	Contact function	Description	Ordering code	L.P. (₹)
OT16...4000	1NO	OA1G10	1SCA022353R4970 ■	580
OT16...125	1NC	OA1G01	1SCA022353R4890 ■	580
OT160EV...4000	1NC	OA3G01	1SCA022456R7410 ■	640



Phase barrier

Frame	Poles	Description	Ordering code	L.P. (₹)
OT160...OT800	3	PB100 low	1SDA054970R1	1,030
OT160...OT800	4	PB100 low	1SDA054971R1	1,490
OT1000...2500	3 & 4	OTB1600/6	1SCA100768R1001	4,290
OT3200...4000	3 & 4	OTB4000/6	1SCA129040R1001	4,340



Mechanical interlock mechanism

(Prevents one switch from closing to ON-position, if the other is not in OFF-position)

Frame	Shaft distance [mm]	Description	Ordering code	L.P. (₹)
OT16...125	100	OTZW24	1SCA022639R5610	2,170
OT160...250	190	OTZW10	1SCA022431R5280	2,640
OT315...400	250	OETLZW14	1SCA022077R3410	6,720
OT315...800	300	OETLZW3	1SCA022049R0380	7,010
OT315...4000	500	OETLZW15	1SCA022081R9340	7,800



Terminal shrouds snap-on mounting, transparent

For 3-pole switches

Frame	Description	Ordering code	L.P. (₹)
OT 16...40F3	OTS40T3	1SCA105317R1001	370
OT63...80F3	OTS63T3	1SCA022353R6750 ■	270
OT 100...125F3	OTS125T3	1SCA022379R968	550

Note:

for requirement of terminal shrouds for higher current rating contact our nearest sales office

Enclosed switches

Wide range of enclosed heavy duty switches
From 16 to 1600 Amperes, 690 V



Enclosed switches are designed and used as main switches for applications, which need to be isolated from the network. The range includes front operated and side operated switch disconnectors, switch fuses and changeover switches enclosed in plastic, steel sheet or stainless steel sheet and aluminium enclosures. They are rated for utilization categories including disconnecting as well as making and breaking the load. In addition, the switch fuses equipped with fuse links protects the application and the cables from overload currents and short circuits.

Plastic enclosures

The plastic enclosures are most suitable for locations with high chemical and moisture requirements. In addition, they are light and easy to install and handle.

Steel sheet enclosures

The steel sheet enclosures are hot dip galvanized and the surface is polyester powder painted. The enclosures are durable and robust for various environments.

Stainless steel sheet enclosures

The stainless steel sheet enclosures are made of AISI 304 stainless steel. They are used particularly in the food and

beverage industry and in locations where high hygiene is required. The smooth surface does not require any painting and is easy to clean.

Aluminum alloy enclosures

Aluminum enclosures have very good impact strength and protection against UV light. They are suitable both for indoor and outdoor use in medium to heavy-duty applications.

Safety for personnel – reliable position indication

- Padlocking in the OFF-position with one, three or six (with the shackle L6) padlocks against unintentional start-up The handle cannot be padlocked in the OFF-position if one of the contacts is not in the OFF position
- The cover cannot be removed if the handle is padlocked
- Door interlock in the ON-position
- Arc proof, short circuit durability function: Expander washers in aluminium enclosures with $I_e > 160$ A and door locking release in large metal sheet enclosures type MSC
- Door interlock defeatable with rectangular and pistol type handles

Zenith Auto Transfer Switch

Transfer/Bypass-Isolation Transfer Switches

Introduction:

ABB's Zenith ZBTS Series Bypass Isolation Transfer Switch consists of two major modules – the automatic transfer and the bypassisolation switches. The automatic transfer switch module is ABB's proven Zenith ZTS Series, built in ZTS, ZTSD or ZTSCT configuration and constructed for rugged, reliable operation. The same components – heavy-duty silver alloy contacts, rugged drive mechanism and silver plated bus bar inter-connections are used throughout the ZBTS Series.

Features and Benefits:

ABB's design requires no additional load break contacts which cause load interruption during bypass-isolation functions. The bypass-isolation switch contacts are out of the system current path except during actual bypass operation. Therefore, they are not constantly exposed to the destructive effects of potential fault currents. The Source 1 (normal), Source 2 (emergency) and load are connected between the automatic transfer switch and the bypass-isolation switch through solidly braced isolating contacts that are open when the automatic transfer switch is isolated. All current carrying components provide high withstand current ratings in excess of those specified in UL 1008 standards.

Design and Construction Features:

- Automatic transfer switch is located on a draw out mechanism to facilitate maintenance
- Emergency power systems can be electrically tested without disturbing the load
- Power cables do not have to be disconnected to remove the transfer switch
- Bypass to any available source with the automatic transfer switch removed
- Engine start circuit maintained during bypass operation; normal power failure causes engine start contact closure even with the ATS removed
- Diagnostic lights and detailed instructions for simple step-by-step operation



- Mechanical and electrical interlocks ensure proper sequence of operation
- Bypass switch contacts are closed only during the bypass-isolation operation
- Silverplated copper bus interconnection of the transfer and bypass switches on all sizes.

Advantages:

- Load is not interrupted during bypass operation
- High close-in and withstand capability
- Temperature rise test per UL 1008 conducted after overload and endurance tests exceeds UL requirements
- Available in ZBTS (utilitygenerator), ZBTSU (utility-utility), ZBTSG (generator-generator) and ZBTSM (manual) configurations; models include standard, delayed and closed transition

Zenith Auto Transfer Switch

Transfer/Bypass-Isolation Transfer Switches

Performance Features:

- Incorporates the applicable features of the ZTS and ZBTS Series
- Source parallel time of less than 100 milliseconds
- Closed transition operation (no power interruption) during transfer and retransfer when sources are within specified parameters
- Open transition transfer operation is initiated upon a source failure
- Available in ZTSCT (utility-generator), ZTSCTU (utilityutility) and ZTSCTM (manual) configurations
- Short Time rated 1600-3000A (Non-bypass) ATS for 0.50 sec and 1.0 sec time duration

Electrical ratings:

- Ratings 100 to 4000 amperes
- 2, 3 or 4 Poles
- Open type, NEMA 1, 3R, 4, 4X and 12
- Available in Transfer Switch (ZTSCT) or Transfer/Bypass Switch (ZBTSCT) styles
- Suitable for emergency and standby applications on all classes of load, 100% tungsten rated through 400 amps
- UL 1008 listed at 480 VAC
- CSA C22.2 No. 178 certified at 600 VAC

Design and Construction Features:

- Electrically operated, mechanically held
- Segmented silver tungsten alloy contacts with separate arcing contacts on all sizes
- Arc quenching grids, enclosed arc chambers, and wide contact air gap
- Components accessible for inspection and maintenance without removal of the switch or the power conductors
- Standard annunciation and operational selection package for user interface
- Active control of the generator governor not required, but is available as an option



The world's first true ATS is here **NEW**

Introducing TruONE.

A critical breakthrough for critical power



What makes TruOne® unique

- One unit, One wire - just like an ATS should be
- Below 50 ms in-phase transfer
- IEC/UL1008 approved
- Overlapping neutral
- ABB Ability™: EDCS for cloud-based services
- Ekip Com modules for uniform platform
- Predictive maintenance
- Modular structure to simplify service

Automatic transfer switches - IEC NEW

Ordering Information



OXB200...250E3X2Q



OXB315...400E3X2Q




OXB500...800E3X3Q



OXB1000...1600E3S2Q



OXB1000...1600E3X2Q



Delayed transition – Open style, Level 2 DIP controls

I-O-II –operation with stable OFF position between positions I and II.

Delivery includes handle for manual operation, 2 m RJ45 connection cable between detachable HMI and ATS frame.

Terminal connection kits (bolts, nuts and washers) available as accessory.

Bottom entry - Source 1 and Source 2 connections on bottom, load connections on top				
No. of poles	Rated current [A]	Type	Order number	L.P. (₹)
4	200	OXB200E3S2QB	1SCA153427R1001	Upon request
4	250	OXB250E3S2QB	1SCA153456R1001	
4	315	OXB315E3S2QB	1SCA153501R1001	
4	400	OXB400E3S2QB	1SCA153515R1001	
4	500	OXB500E3S2QB	1SCA151025R1001	
4	630	OXB630E3S2QB	1SCA151054R1001	
4	800	OXB800E3S2QB	1SCA150934R1001	
4	1000	OXB1000E3S2QB	1SCA153577R1001	
4	1250	OXB1250E3S2QB	1SCA153610R1001	
4	1600	OXB1600E3S2QB	1SCA153622R1001	

Delayed transition – Open style, Level 3 LCD controls

I-O-II –operation with stable OFF position between positions I and II.

Delivery includes handle for manual operation, 2 m RJ45 connection cable between detachable HMI and ATS frame.

Terminal connection kits (bolts, nuts and washers) available as accessory.

Bottom entry - Source 1 and Source 2 connections on bottom, load connections on top				
No. of poles	Rated current [A]	Type	Order number	L.P. (₹)
4	200	OXB200E3S3QB	1SCA153429R1001	Upon request
4	250	OXB250E3S3QB	1SCA152435R1001	
4	315	OXB315E3S3QB	1SCA152046R1001	
4	400	OXB400E3S3QB	1SCA153517R1001	
4	500	OXB500E3S3QB	1SCA151741R1001	
4	630	OXB630E3S3QB	1SCA151057R1001	
4	800	OXB800E3S3QB	1SCA149958R1001	
4	1000	OXB1000E3S3QB	1SCA153579R1001	
4	1250	OXB1250E3S3QB	1SCA153612R1001	
4	1600	OXB1600E3S3QB	1SCA152412R1001	

Delayed transition – Open style, Level 4 Touch controls

I-O-II –operation with stable OFF position between positions I and II.

Delivery includes handle for manual operation, 2 m RJ45 connection cable between detachable HMI and ATS frame.

Terminal connection kits (bolts, nuts and washers) available as accessory.

Bottom entry - Source 1 and Source 2 connections on bottom, load connections on top				
No. of poles	Rated current [A]	Type	Order number	L.P. (₹)
4	200	OXB200E3S4QB	1SCA153431R1001	Upon request
4	250	OXB250E3S4QB	1SCA152794R1001	
4	315	OXB315E3S4QB	1SCA153504R1001	
4	400	OXB400E3S4QB	1SCA152048R1001	
4	500	OXB500E3S4QB	1SCA150003R1001	
4	630	OXB630E3S4QB	1SCA151060R1001	
4	800	OXB800E3S4QB	1SCA149959R1001	
4	1000	OXB1000E3S4QB	1SCA151491R1001	
4	1250	OXB1250E3S4QB	1SCA153614R1001	
4	1600	OXB1600E3S4QB	1SCA152414R1001	

Enclosed automatic transfer switches - IEC NEW

Ordering Information



Enclose TruOne ATS

Delayed transition - Enclosed style, Level 3 LCD controls

I-O-II –operation with stable OFF position between positions I and II.

Delivery includes steel sheet enclosure, handle for manual operation, PE-terminal, neutral bar (3 pole versions), transparent IP54 protection cover and bolt kit with nuts and washers for all terminals. Enclosure rating IP54 and 4 mounting brackets for wall mounting included in the delivery. Cable connections from the bottom, one large cable entry flange on bottom side, top side blank and door with 2 locks. Color RAL 7035. ATS manually operable without opening the door.

All cable entries from bottom - source 1, source 2 and load				
No. of poles	Rated current [A]	Type	Order number	L.P. (₹)
4	200	OXB200E3S3Q54B	1SCA157160R1001	Upon request
4	250	OXB250E3S3Q54B	1SCA157162R1001	
4	315	OXB315E3S3Q54B	1SCA157163R1001	
4	400	OXB400E3S3Q54B	1SCA157165R1001	
4	630	OXB630E3S3Q54B	1SCA151056R1001	
4	800	OXB800E3S3Q54B	1SCA150936R1001	
4	1000	OXB1000E3S3Q54B	1SCA153649R1001	
4	1250	OXB1250E3S3Q54B	1SCA153653R1001	



Enclose TruOne ATS

Delayed transition - Enclosed style, Level 4 Touch controls

I-O-II –operation with stable OFF position between positions I and II.

Delivery includes steel sheet enclosure, handle for manual operation, PE-terminal, neutral bar (3 pole versions), transparent IP54 protection cover and bolt kit with nuts and washers for all terminals. Enclosure rating IP54 and 4 mounting brackets for wall mounting included in the delivery. Cable connections from the bottom, one large cable entry flange on bottom side, top side blank and door with 2 locks. Color RAL 7035. ATS manually operable without opening the door.

Bottom entry - Source 1 and Source 2 connections on bottom, load connections on top				
No. of poles	Rated current [A]	Type	Order number	L.P. (₹)
4	200	OXB200E3S4Q54B	1SCA157161R1001	Upon request
4	250	OXB250E3S4Q54B	1SCA157010R1001	
4	315	OXB315E3S4Q54B	1SCA157164R1001	
4	400	OXB400E3S4Q54B	1SCA157011R1001	
4	630	OXB630E3S4Q54B	1SCA151059R1001	
4	800	OXB800E3S3Q54B	1SCA150936R1001	
4	1000	OXB1000E3S4Q54B	1SCA153650R1001	
4	1250	OXB1250E3S4Q54B	1SCA153654R1001	

Compact ATS



Automatic transfer switches, I - O - II operation


Supplied with bridging bars and direct mounted handle

Rated current In [A]	Pole	Description	Ordering code	L.P.(₹)
63	3	OTM63F3C20D400C	1SYN151423R1001	43,330
63		OTM63F3C21D400C	1SYN151423R1002	62,610
125		OTM125F3C20D400C	1SYN151423R1003	48,570
125		OTM125F3C21D400C	1SYN151423R1004	70,790

Rated current In [A]	Pole	Description	Ordering code	L.P.(₹)
40	4	OTM40F4C20D400C	1SYN151252R1001	43,090
40		OTM40F4C21D400C	1SYN151253R1001	65,450
40		OTM40F4CB21D400C	1SYN150580R1001	65,450
63		OTM63F4C20D400C	1SYN151254R1001	45,350
63		OTM63F4C21D400C	1SYN151255R1001	68,510
63		OTM63F4CB21D400C	1SYN150586R1001	68,520
125		OTM125F4C20D400C	1SYN151250R1001	53,430
125		OTM125F4C21D400C	1SYN151251R1001	77,400
125		OTM125F4CB21D230C	1SYN150574R1001	77,400


Note:

- For 2 pole requirement contact nearest sales office

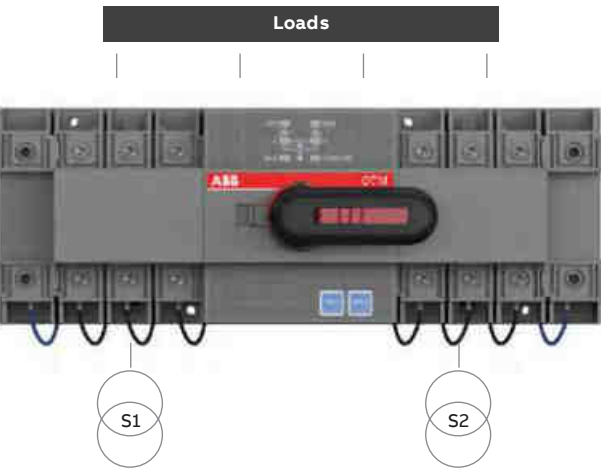

OTM_C20D:

- For Network/Network application
- Fixed version with pre-defined delay times and voltage thresholds

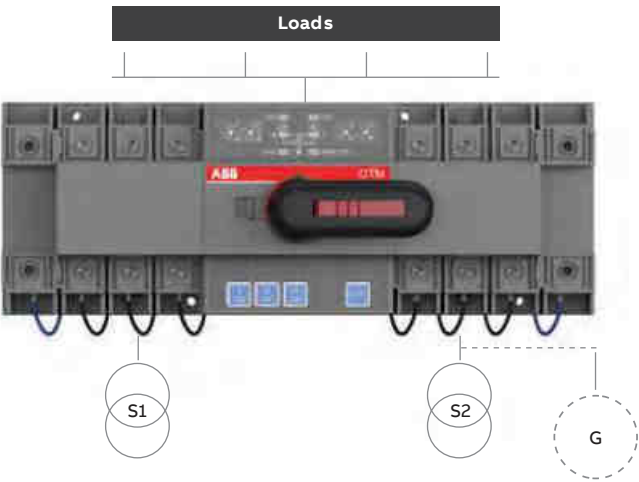

OTM_C21D

- For Network/Network and Network/Genset applications
- Adjustable version with configurable transfer and back-switching delays Adjustable over and under-voltage thresholds

OT automatic transfer switches



OMD300



OA1G10



OMZB



OTZC13...34



OTZC43...44
OTZC53...54

Automatic transfer switches, I - O - II operation

Supplied with bridging bars and handle

Automatic operation, equipped with OMD300 controller unit with integrated dual power supply				
Rated current In [A]	Poles	Description	Ordering code	L.P.(₹)
160	4	OTM160E4C3D230C	1SYN106305R1001 ■ *	1,11,740
200		OTM200E4C3D230C	1SYN106309R1001 *	1,15,500
250		OTM250E4C3D230C	1SYN106313R1001 *	1,19,260
315		OTM315E4C3D230C	1SYN106317R1001 *	1,24,920
400		OTM400E4C3D230C	1SYN106318R1001 ■ *	1,31,820
630		OTM630E4C3D230C	1SYN108726R1001 *	1,75,760
800		OTM800E4C3D230C	1SYN108728R1001 *	2,32,260
1000		OTM1000E4C3D230C	1SYN112852R1001 *	2,51,100
1250		OTM1250E4C3D230C	1SYN112851R1001 *	2,88,750
1600		OTM1600E4C3D230C	1SYN112848R1001 *	3,76,630

* Automatic Transfer Switches 1SYN... code include the following:

- OTM160...1600_CM_ motorized change-over switch - 1 no.
- Bridging bar - 1 no.
- OMZB_ voltage sensing connectors - 1 no.
- OA1G10 auxiliary contacts - 2 no.
- OMD300E480C-A1 - 1 no.



OMD800



OA1G10



OMZB



OTZC13...34



OTZC43...44
OTZC53...54

Automatic operation, equipped with OMD800 controller unit with display				
Rated current In [A]	Poles	Description	Ordering code	L.P.(₹)
160	4	OTM160E4C8D230C	1SYN101020R1001 *	1,50,650
200		OTM200E4C8D230C	1SYN101021R1001 *	1,56,930
250		OTM250E4C8D230C	1SYN101022R1001 *	1,63,210
315		OTM315E4C8D230C	1SYN101063R1001 *	1,69,480
400		OTM400E4C8D230C	1SYN101064R1001 *	1,88,310
630		OTM630E4C8D230C	1SYN108453R1001 *	2,07,160
800		OTM800E4C8D230C	1SYN108455R1001 *	2,51,100
1000		OTM1000E4C8D230C	1SYN112861R1001 *	3,20,140
1250		OTM1250E4C8D230C	1SYN112864R1001 *	3,51,530
1600		OTM1600E4C8D230C	1SYN112867R1001 *	4,39,410

* Automatic Transfer Switches 1SYN... code include the following:

- OTM160...1600_CM_ motorized change-over switch - 1 no.
- Bridging bar - 1 no.
- OMZB_ voltage sensing connectors - 1 no.
- OA1G10 auxiliary contacts - 2 no.
- OMD800E480C-A1 - 1 no.

Note:

- Motor voltage Ue 220-240 V AC
- For 3 pole requirement contact the nearest sales office
- For OMD800, consider accessory ODP5 for dual power supply
- For mounting the OMD automatic control unit on the door. The type OMZD1 and OMZC2 must be ordered for mounting the control on the door (Refer to catalogue)

OT manual changeover switches

Manual changeover switches, I-O-II -operation

Supplied with extended shaft and IP 65 pistol type handle



Rated current In [A]	Poles	Description	Ordering code	L.P. (₹)
16	3	OT16F3C	1SYN104816R1001 ■	3,670
25		OT25F3C	1SYN104863R1001 ■	4,640
40		OT40F3C	1SYN104913R1001 ■	5,030
63		OT63F3C	1SYN105338R1001 ■	6,560
80		OT80F3C	1SYN105402R1001	7,220
100		OT100F3C	1SYN105008R1001 ■	9,660
125		OT125F3C	1SYN105037R1001 ■	10,120
16	4	OT16F4C	1SYN104831R1001	4,640
25		OT25F4C	1SYN104877R1001	4,820
40		OT40F4C	1SYN104934R1001 ■	5,320
63		OT63F4C	1SYN105369R1001 ■	7,430
80		OT80F4C	1SYN105418R1001 ■	7,810
100		OT100F4C	1SYN105019R1001	11,500
125		OT125F4C	1SYN105054R1001 ■	11,770
Supplied with bridging bars, extended shaft and IP 65 pistol type handle				
160	3	OT160E03CP	1SYN022772R6510 ■	13,990
200		OT200E03CP	1SYN022771R7520 ■	14,460
250		OT250E03CP	1SYN022771R3450 ■	17,380
315		OT315E03CP	1SYN022772R6780 ■	21,220
400		OT400E03CP	1SYN022771R8500 ■	25,080
630		OT630E03CP	1SYN022785R6050 ■	37,630
800		OT800E03CP	1SYN022785R6300	48,240
1000		OT1000E03CP	1SYN022872R1680 ■	1,30,260
1250		OT1250E03CP	1SYN022872R0790	1,44,730
1600		OT1600E03CP	1SYN022872R1840	1,78,500
2000		OT2000E03CP	1SYN103908R1001	2,70,180
2500		OT2500E03CP	1SYN105615R1001	2,94,300
3200		OT3200E03CP	1SYN129156R1001	4,24,550
160	4	OT160E04CP	1SYN022775R9440 ■	16,400
200		OT200E04CP	1SYN022771R7280 ■	16,890
250		OT250E04CP	1SYN022775R4640 ■	18,810
315		OT315E04CP	1SYN022775R7150 ■	22,970
400		OT400E04CP	1SYN022771R8680 ■	27,020
630		OT630E04CP	1SYN022785R6130 ■	46,320
800		OT800E04CP	1SYN022785R6210 ■	55,960
1000		OT1000E04CP	1SYN022872R1500	1,49,550
1250		OT1250E04CP	1SYN022872R1250	1,56,320
1600		OT1600E04CP	1SYN022872R2310	1,92,980
2000		OT2000E04CP	1SYN103912R1001	3,47,350
2500		OT2500E04CP	1SYN103906R1001	3,85,970
3200		OT3200E04CP	1SYN129158R1001	5,06,580

Note: Contact our nearest sales office

1. For 6 pole change over
2. For manual/motorized bypass switch
3. For manual closed transition
4. For wide phase manual change over

OT motorized changeover switches

Changeover switches, motor operation, I-O-II -operation

Supplied with bridging bars and handle



Rated current In [A]	Poles	Description	Ordering code	L.P.(₹)
40	3	OTM40F3CMA230V	1SYN120096R1001	30,230
63		OTM63F3CMA230V	1SYN120095R1001	31,960
80		OTM80F3CMA230V	1SYN120093R1001	34,860
100		OTM100F3CMA230V	1SYN120071R1001	36,600
125		OTM125F3CMA230V	1SYN120070R1001	37,770
160		OTM160E3CM230C	1SYN022845R8610	46,760
200		OTM200E3CM230C	1SYN022845R8960	47,380
250		OTM250E3CM230C	1SYN022845R9260	58,450
315		OTM315E3CM230C	1SYN022847R1210	59,070
400		OTM400E3CM230C	1SYN022847R1630	71,080
630		OTM630E3CM230C	1SYN103567R1001	79,990
800		OTM800E3CM230C	1SYN103570R1001	1,18,900
1000		OTM1000E3CM230C	1SYN112677R1001	1,77,210
1250		OTM1250E3CM230C	1SYN112676R1001	1,94,450
1600		OTM1600E3CM230C	1SYN112678R1001	2,33,830
2000		OTM2000E3CM230C	1SYN112709R1001	3,94,120
2500		OTM2500E3CM230C	1SYN112710R1001	4,32,900
40	4	OTM40F4CMA230V	1SYN120102R1001	32,550
63		OTM63F4CMA230V	1SYN120101R1001 ■	34,290
80		OTM80F4CMA230V	1SYN120100R1001	36,030
100		OTM100F4CMA230V	1SYN120098R1001 ■	37,200
125		OTM125F4CMA230V	1SYN120097R1001 ■	39,530
160		OTM160E4CM230C	1SYN022848R1510 ■	48,010
200		OTM200E4CM230C	1SYN022846R1590 ■	48,250
250		OTM250E4CM230C	1SYN022846R1910 ■	59,070
315		OTM315E4CM230C	1SYN022847R2870 ■	60,300
400		OTM400E4CM230C	1SYN022847R3250 ■	75,690
630		OTM630E4CM230C	1SYN022873R1990 ■	81,820
800		OTM800E4CM230C	1SYN022872R8340 ■	1,23,050
1000		OTM1000E4CM230C	1SYN112703R1001	1,78,450
1250		OTM1250E4CM230C	1SYN112702R1001	1,95,690
1600		OTM1600E4CM230C	1SYN112704R1001	2,39,980
2000		OTM2000E4CM230C	1SYN112712R1001	4,26,410
2500		OTM2500E4CM230C	1SYN112713R1001	4,65,190

Note:

Motor voltage Ue 110-240 V AC/DC (OTM40...125A)

Motor voltage Ue 220-240 V AC (OTM160...2500A)

OMD control units can be purchased separately for their motorized changeover switches in order to build an ATS by themselves. Contact nearest sales office for making selection.

Contact our nearest sales office:

- For motor voltage Ue 110...125 V AC/DC (160A-2500A)
- For motor voltage Ue = 48V DC (160A-2500A)

Accessories for changeovers (manual, motorized, ATS)



Shaft

Frame	Description	Ordering code	L.P. (₹)
OT16...125F_C	EXP6X170	1SCA108224R1001	360
OT160...250_C	EXP6x161	1SCA022067R176 ■	360
OT315...400_C	EXP12x166	1SCA022325R671	570
OT630...3200_C	EXP12x185	1SCA022325R710 ■	680



Handle

Frame	Description	Ordering code	L.P. (₹)
OT16...125F_C	OHB45J6E311	1SCA022817R2130 ■	2,330
OT160...250_C	OHB65J6E011	1SCA022383R2480 ■	2,590
OT315...400_C	OHB95J12E011	1SCA022621R0760 ■	2,950
OT630...800_C	OHB125J12E011	1SCA022589R3340 ■	3,270
OT1000...3200_C	OHB200J12PE011	1SCA022873R4230	7,170



Auxiliary contacts

Frame	Contact functions	Installation side	Description	Ordering code	L.P. (₹)
OT16...125F_C OTM40...125	1NO	Right	OA1G10	1SCA022353R497	580
	1NC	Right	OA8G01	1SCA022744R224 ■	1,040
	1NO	Left	OA7G10	1SCA022673R114 ■	920
	1NC	Left	OA1G01	1SCA022353R489	580
OT160...3200 OTM160...2500	1NO	Right	OA1G10	1SCA022353R4970	580
	1NC	Right	OA3G01	1SCA022456R7410	650



Phase barriers

3-pole change-overs need 8 barriers and 4-pole change-overs need 12 barriers for full protection.

Frame	Poles	Description	Ordering code	L.P. (₹)
OT160...800 OTM160...800	3	PB100 low	1SDA054970R1	1,030
	4	PB100 low	1SDA054971R1	1,490



Basic ATS controller for motorised change over

Frame	Description	Ordering code	L.P. (₹)
40...2500A	ODPS230	1SCA122946R1001 ■	13,530

Note: Contact our nearest sales office for more information

Kabeldon low voltage switchgear system

Kabeldon low voltage distribution system by ABB is used to build modern systems for various applications,

from substations and cable distribution cabinets to distribution boards in industry.



Features of the Kabeldon IP-system are its simplicity and reliability. These are the most important factors when you want to achieve low operating costs and high delivery reliability in a distribution system.

- Busbars of continuously-extruded aluminium sections, insulated with a layer of polyamid.
- The busbar has a touch-proof contact slot. This ensures safety regardless of where on the busbar the switching device will be placed.
- Blade fuses in all of the fuse-switch disconnectors.
- The switching devices can be arranged in any order, regardless of rated current.
- All parts, busbars and devices, fulfil IP2X protection in accordance with IEC 60529*).
- Switching devices 100-1600 A.

- It is easy to add new switching devices to existing distribution boards.
- Switching devices are mounted on and connected to the busbar system in the same operation.
- Switching devices can be connected when the system is live.
- Always voltage-free ("dead") when changing fuses.
- Busbars are available with rated currents from 400 to 1600 A.
- Switching devices, connectors and busbars combine to form a modular system. Each module is 12.5 mm. The modular system makes planning easier.
- The compact design of the switching devices makes them suitable for use in many different types of distribution boards.
- All switching devices have a utilisation category so that they can be used in cable distribution cabinets, substations and other distribution boards.

ABB's comprehensive range of LV control products

The range of ABB control products ranks amongst the most extensive on the market with a full range of innovative solutions for control & protection, motor starting, intelligent motor management, measurement and monitoring and safety applications.

The business unit is comprised of 3 main product families:

- Control & protection
- Electronic relays
- Safety products

Our products

Our products are already among the most extensive in the market and we are constantly adding new products in order to meet ever changing customer needs. Quality and reliability are built into every device to ensure total performance satisfaction, even in the most demanding applications.

We offer a very modern and competitive range of contactors, starters, manual motor starters, a wide range of electronic relays and overload relays, together with an extended of pilot devices.

Our offering


- Contactors
- Manual motor starters
- Thermal overload relays
- Electronic overload relays
- Intelligent motor management systems
 - Universal motor controllers
 - Communication fieldbus plugs
- Electronic products and relays
 - Timers
 - Measuring and monitoring relays
 - Power supplies
 - Interface relays & optocouplers
- Jokab safety systems
- Pilot devices
- Arc guard systems



Motor starting and protection


Keep things moving with protection and control - at every level.

Our broad portfolio of motor starting and protection solutions are fully scalable, allowing you to keep things moving whatever the extent of your operations.

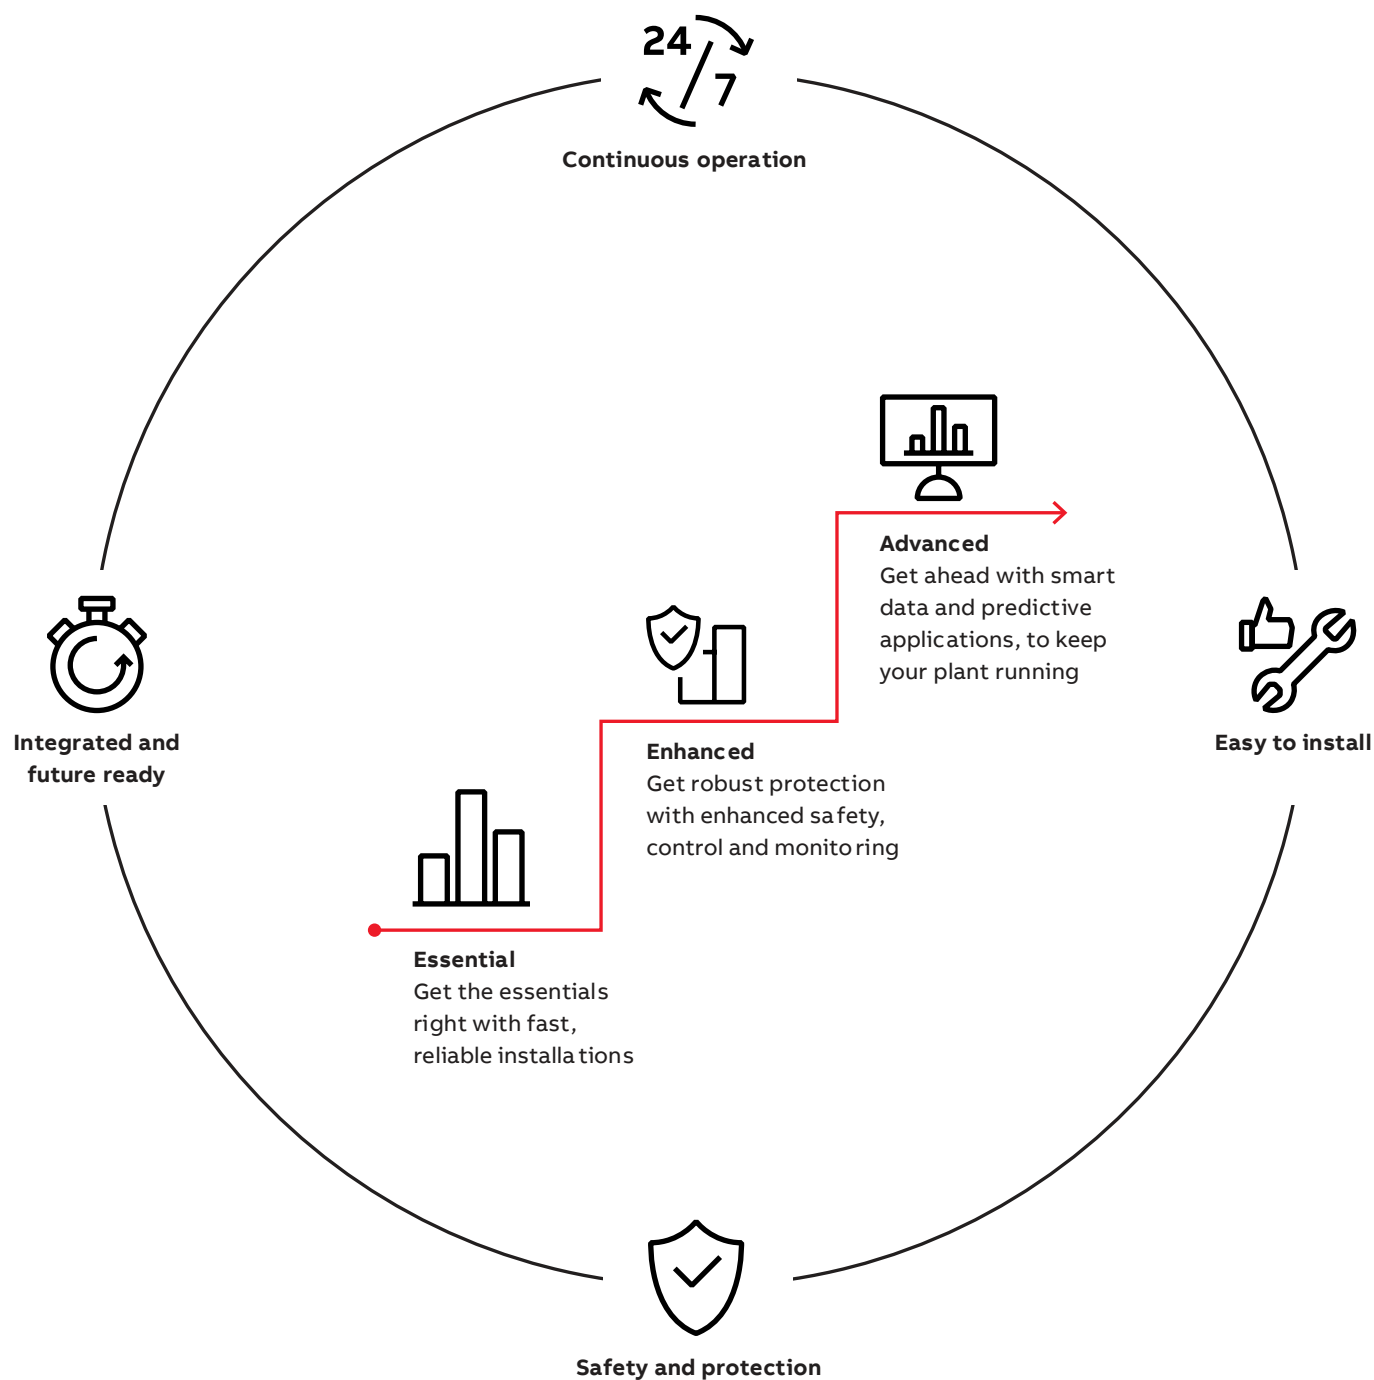

Enhanced solutions

Get robust protection with enhanced safety, control and monitoring

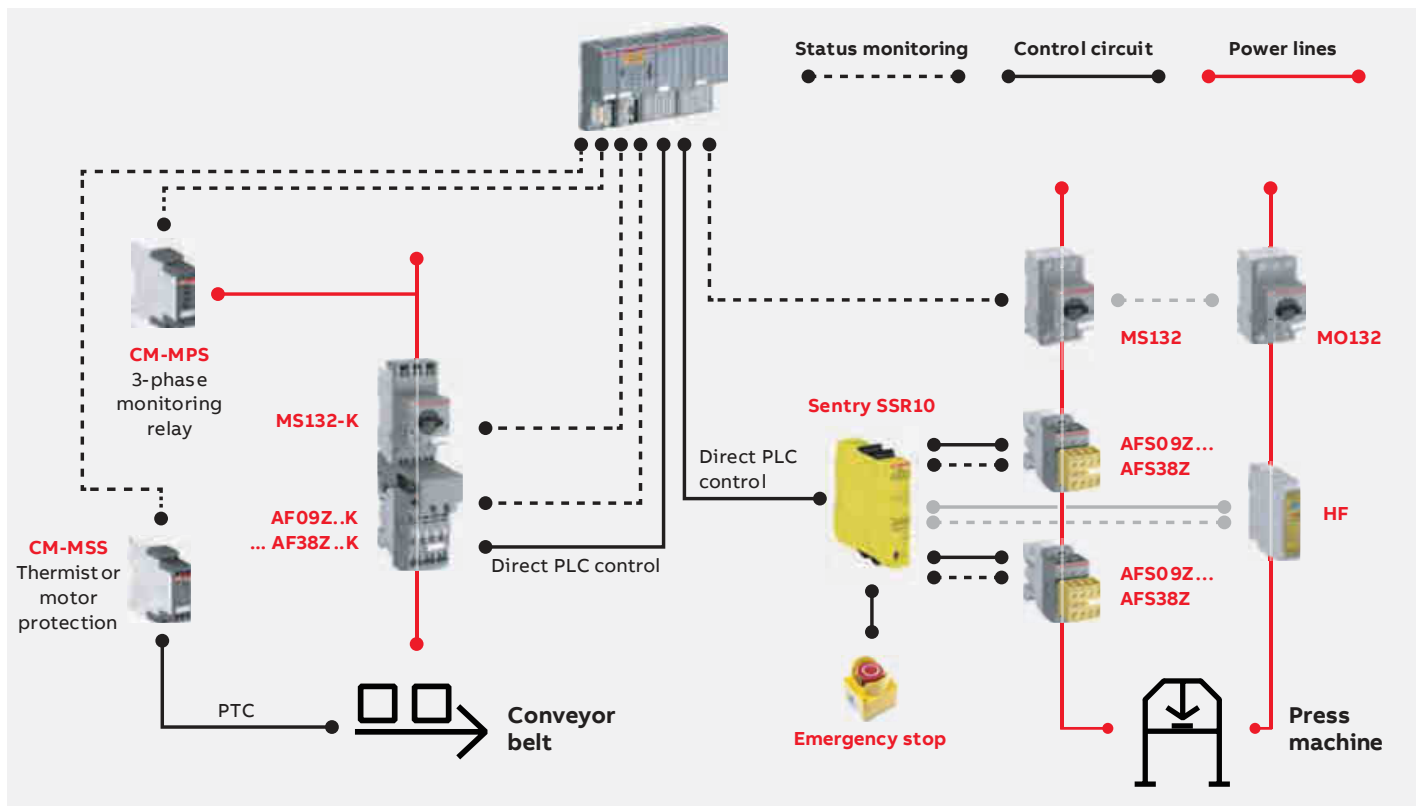

Safety and protection

Enhanced safety and protection for solutions with higher specification requirements.


- Integration in machine manufacturer's systems complying with main standards EN ISO 13849, EN 62061 and IEC / EN 61508
- Trouble-free and economic operation of machines and installations thanks to the monitoring of all important parameters in your three-phase network
- Prevent overheating, overload and insufficient cooling. Irregularities are signaled early to avoid plant downtime



Speed up your projects

Reduce time in planning, designing, assembly and delivery of custom panels to market.

- Use the same starters in Europe, Asia and North America as one contactor coil now handles 100 V – 250 V AC / DC, 50 / 60 Hz
- Push-in Spring allows you to insert both ferruled and rigid cables without the need to use any tools, boosting your productivity like never before
- With more than 1800 tested and validated coordination tables available in the SOC tool, you can quickly and easily choose the right ABB solution



Space-saving

Space is usually very limited for control panels, but our compact solutions are designed to easily fit into your application.

- Motor starters can be controlled directly by PLC thanks to AF contactor versions with low consumption coil, external or built-in PLC interface. No need for interface relays, which requires extra space
- Motor starters up to 3 kW / 3 hp require 90 % less space thanks to ABB's HF electronic compact starter. At just 22.5 mm width, it still provides motor starting functionalities with embedded protection and safety

Advanced solutions

Get ahead with intelligent, predictive operations thanks to integrated data and advanced connectivity



Integrated and future ready

Data and precise measurements accessible via flexible communication options ensure reliable operations and efficient energy management. Adapt to future needs without big investments.

- The UMC100.3 is compatible with more communication protocols than any other motor controller. This allows you to have software that enables predictive maintenance and acts as an intelligent data hub
- The SACE Tmax XT range enables you to monitor and manage a wealth of information easily, no matter where you are and allows you to easily upgrade trip units to suit your changing needs



Continuous operation

Detect problems earlier and prevent plant stand-stills with integrated protection functions as well as extensive diagnostic and status information.

- Protect your motors at all times with the UMC100.3, even if your control or communication system (Ethernet or Fieldbus) breaks down
- With the SACE Tmax XT up to 30% more data is available on the cloud, making diagnosis and maintenance much easier
- Ensure continuity of service and equipment protection at all times with the advanced electronic trip unit and intelligent motor management systems




Speed up your project

Design, commissioning and maintenance are easy, cutting costs and saving you time. Flexible design allows you to find a tailor made solution.

- With the UMC100.3, simple software configuration means that you're always in control. Parameters can be set via quality FDI-based software or directly using the operating panel
- With the SACE Tmax XT range, simplified installation of frames, integration of circuit breakers into a communication network, trip unit settings performed via front display and bluetooth and Ekip Mobile connectivity, can save you up to 40% time overall


Advanced solutions

UMC100.3 application example

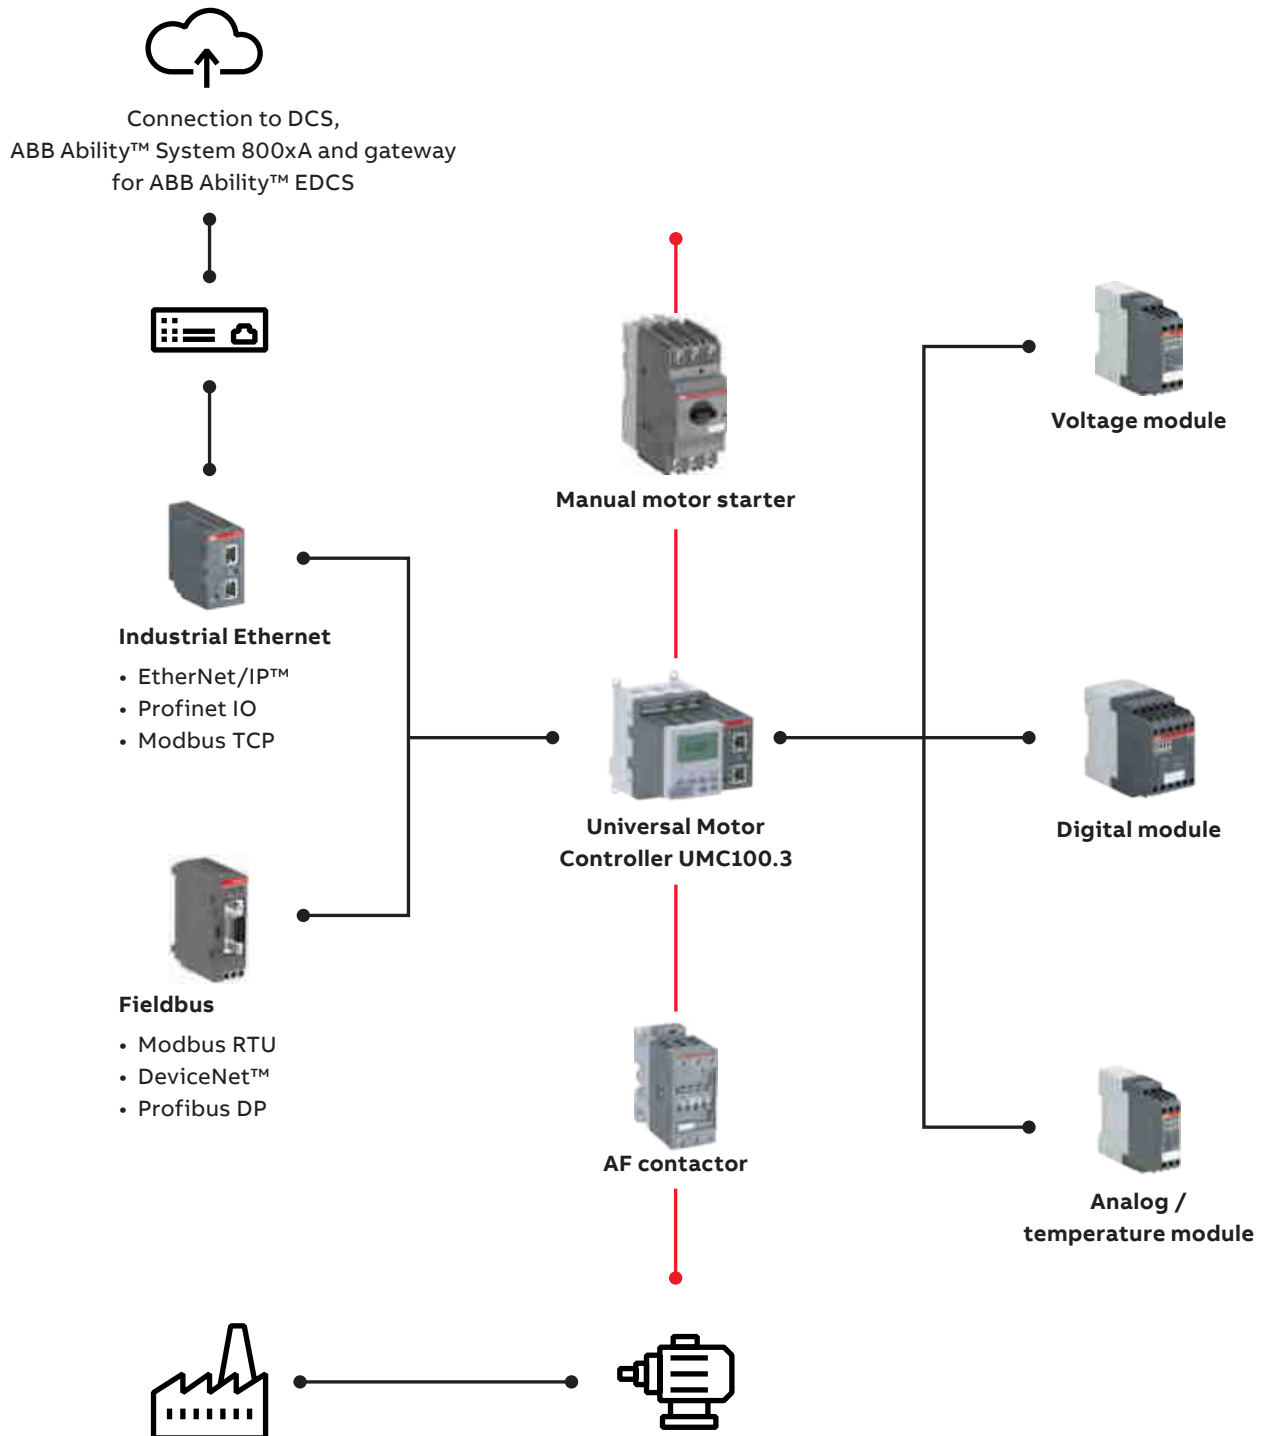

Complete solutions for control panels

ABB's broad portfolio offers all you need for your application, at every level.

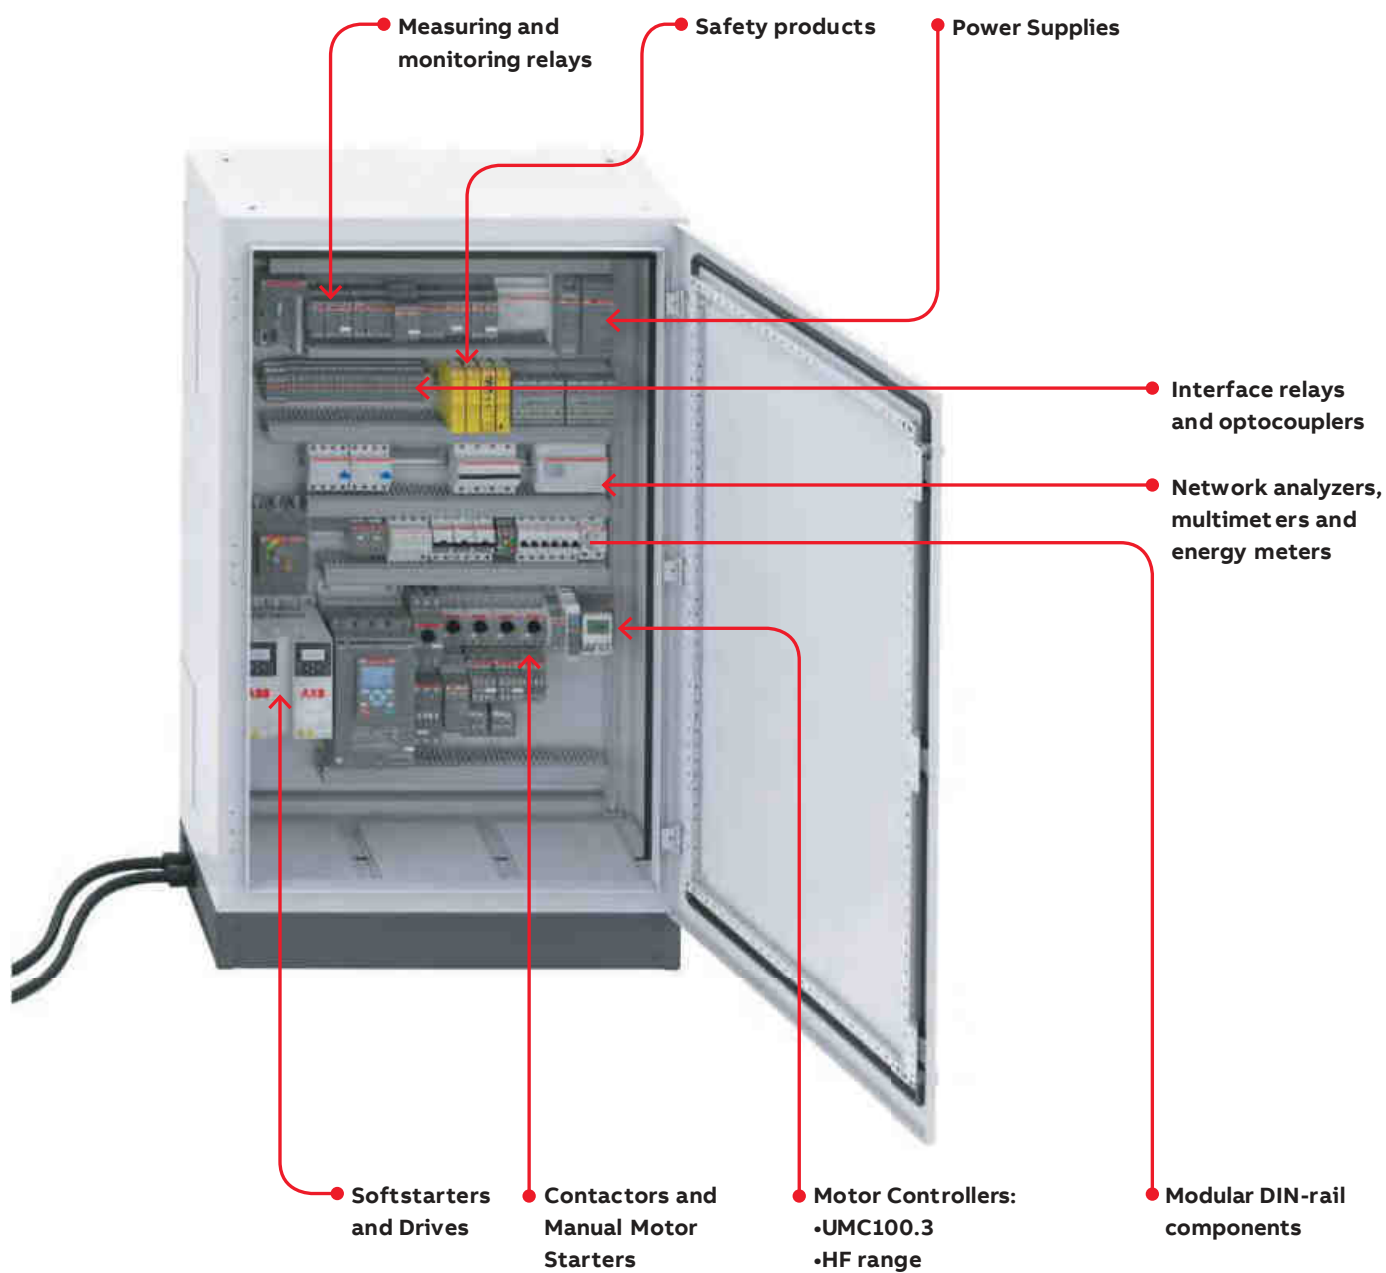

Auxiliary contactors



Standard control contactors

No: of contacts	Contact configuration		Type code reference	Ordering code	L.P.(₹)	Type code reference	Ordering code	L.P.(₹)
	NO	NC						
4	2	2	N22E **	1SBH141001R□□22 ■	1,370	NL22E **	1SBH143001R□□22 ■	2,090
4	3	1	N31E **	1SBH141001R□□31 ■		NL31E **	1SBH143001R□□31 ■	
4	4	0	N40E **	1SBH141001R□□40 ■		NL40E **	1SBH143001R□□40 ■	

Refer coil voltage & codes mentioned below.

No: of contacts	Contact configuration		Type code reference	Ordering code	L.P.(₹)
	NO	NC			
4	2	2	NX22E	1SBH901074R□□22 ■	1,130
4	3	1	NX31E	1SBH901074R□□31 ■	
4	4	0	NX40E	1SBH901074R□□40 ■	

Refer coil voltage & codes mentioned below.

Wide band AC / DC operated

No: of contacts	Contact configuration		Type code reference	Ordering code	L.P.(₹)
	NO	NC			
4	2	2	NF22E **	1SBH137001R□□22 ■	2,430
4	3	1	NF31E **	1SBH137001R□□31 ■	
4	4	0	NF40E **	1SBH137001R□□40 ■	

Refer coil voltage & codes mentioned below.

Wide band low power consumption

Type code reference #	Ordering code	L.P.(₹)
NFZ22E **	1SBH136001R□□22	3,060
NFZ31E **	1SBH136001R□□31	
NFZ40E **	1SBH136001R□□40	

#Allows direct control by PLC output ≥ 24 V DC 500 mA

Coil voltages and codes

N & NX range (AC operated)

Voltage	Voltage	Code
V - 50Hz	V - 60Hz	□□
24	24	8 1 ■
110	110 ... 120	8 4 ■
220 ... 230	230 ... 240	8 0 ■
400 ... 415	415 ... 440	8 6 ■

NF range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	V DC	□□
24...60	20...60	1 1 ■
48...130	48...130	1 2 ■
100...250	100...250	1 3 ■
250...500	250...500	1 4 ■

NL (DC operated)

Voltage	Code
V DC	□□
24	8 1 ■
48	8 3 ■
110	8 6 ■
240	8 9 ■

NFZ range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	V DC	□□
-	12...20	2 0
24...60	20...60	2 1
48...130	48...130	2 2
100...250	100...250	2 3

■ Stock items

3 pole contactors: AX09...AX370 : AC operated



AX09



AX95



AX185



AX370

AX Contactor

AX contactors are mainly used for controlling 3-phase motors and power circuits up to 690 V AC. These contactors are of the block type design with:

- 3 main poles and built-in auxiliary contact
- Control circuit: AC operated
- Add-on auxiliary contact blocks for front or side mounting and a wide range of accessories

Contactors: 3-pole – AC operated

AC1 duty Amps	AC3 rating at 415V		Auxiliary contacts		Type code	Ordering code	L.P.(₹)
	Amps	kW					
22	9	4	1NO	-	AX09-30-10	1SBL901074R□□10 ■	1,030
22	9	4	-	1NC	AX09-30-01	1SBL901074R□□01 ■	1,030
25	12	5.5	1NO	-	AX12-30-10	1SBL911074R□□10 ■	1,160
25	12	5.5	-	1NC	AX12-30-01	1SBL911074R□□01 ■	1,160
27	18	9	1NO	-	AX18-30-10	1SBL921074R□□10 ■	1,320
27	18	9	-	1NC	AX18-30-01	1SBL921074R□□01 ■	1,320
32	25	11	1NO	-	AX25-30-10	1SBL931074R□□10 ■	1,840
32	25	11	-	1NC	AX25-30-01	1SBL931074R□□01 ■	1,840
55	32	15	1NO	-	AX32-30-10	1SBL281074R□□10 ■	3,840
55	32	15	-	1NC	AX32-30-01	1SBL281074R□□01 ■	3,840
60	40	18.5	1NO	-	AX40-30-10	1SBL321074R□□10 ■	5,820
60	40	18.5	-	1NC	AX40-30-01	1SBL321074R□□01 ■	5,820
100	50	25	1NO	1NC	AX50-30-11	1SBL351074R□□11 ■	7,170
115	65	30	1NO	1NC	AX65-30-11	1SBL371074R□□11 ■	9,760
125	80	37	1NO	1NC	AX80-30-11	1SBL411074R□□11 ■	12,300
145	96	45	1NO	1NC	AX95-30-11	1SFL431074R□□11 ■	14,260
160	115	55	1NO	1NC	AX115-30-11	1SFL981074R□□11 ■	18,040
190	150	75	1NO	1NC	AX150-30-11	1SFL991074R□□11 ■	23,680
250	185	90	1NO	1NC	AX185-30-11	1SFL491074R□□11 ■	27,790
275	205	110	1NO	1NC	AX205-30-11	1SFL501074R□□11 ■	32,800
400	265	132	1NO	1NC	AX260-30-11	1SFL547074R□□11 ■	43,290
500	305	160	1NO	1NC	AX300-30-11	1SFL587074R□□11 ■	50,790
600	370	200	1NO	1NC	AX370-30-11	1SFL607074R□□11 ■	64,510

Note: Complete the contactor code by replacing □□ with desired coil voltages as per above table.

Coil voltages and codes AX range

Voltage	Voltage	Code
□□ V - 50Hz	□□ V - 60Hz	□□
24	24	8 1 ■
110	110	8 4 ■
220 ... 230	220 ... 230	8 0 ■
400 ... 415	400 ... 415	8 6 ■

3 pole contactors: AC operated



Contactors: 3-pole – AC operated

AC1 duty Amps	AC3 rating at 415V			Auxiliary contacts		Type code	Ordering code	L.P.(₹)
Amps	Amps	hP	kW					
25	9	5.5	4	1NO	-	A09-30-10 **	1SBL141001R□□10 ■	1,250
25	9	5.5	4	-	1NC	A09-30-01 **	1SBL141001R□□01 ■	1,250
27	12	7.5	5.5	1NO	-	A12-30-10 **	1SBL161001R□□10 ■	1,410
27	12	7.5	5.5	-	1NC	A12-30-01 **	1SBL161001R□□01 ■	1,410
30	17	12.5	7.5	1NO	-	A16-30-10 **	1SBL181001R□□10 ■	1,600
30	17	12.5	7.5	-	1NC	A16-30-01 **	1SBL181001R□□01 ■	1,600
45	26	15	11	1NO	-	A26-30-10 **	1SBL241001R□□10 ■	2,210
45	26	15	11	-	1NC	A26-30-01 **	1SBL241001R□□01 ■	2,210
55	32	20	15	1NO	-	A30-30-10 **	1SBL281001R□□10 ■	4,430
55	32	20	15	-	1NC	A30-30-01 **	1SBL281001R□□01 ■	4,430
60	37	30	18.5	1NO	-	A40-30-10 **	1SBL321001R□□10 ■	6,950
60	37	30	18.5	-	1NC	A40-30-01 **	1SBL321001R□□01 ■	6,950
100	50	40	25	-	-	A50-30-00 **	1SBL351001R□□00 ■	8,500
115	65	50	37	-	-	A63-30-00 **	1SBL371001R□□00 ■	11,720
125	75	60	40	-	-	A75-30-00 **	1SBL411001R□□00 ■	14,720
145	96	70	55	1NO	1NC	A95-30-11**	1SFL431001R□□11 ■	18,680
160	110	75	59	1NO	1NC	A110-30-11**	1SFL451001R□□11 ■	23,550
250	145	100	75	1NO	1NC	A145-30-11**	1SFL471001R□□11 ■	30,070
275	185	115	90	1NO	1NC	A185-30-11**	1SFL491001R□□11 ■	37,150
350	205	150	110	1NO	1NC	AF205-30-11**	1SFL527002R□□11 ■	42,070
400	265	175	140	1NO	1NC	AF265-30-11**	1SFL547002R□□11 ■	46,990
500	305	215	160	1NO	1NC	AF305-30-11**	1SFL587002R□□11 ■	55,560
600	370	270	200	1NO	1NC	AF370-30-11**	1SFL607002R□□11 ■	72,170
600	400	300	220	1NO	1NC	AF400-30-11**	1SFL577001R□□11 ■	79,610
700	460	340	250	1NO	1NC	AF460-30-11**	1SFL597001R□□11 ■	99,850
800	580	470	355	1NO	1NC	AF580-30-11**	1SFL617001R□□11 ■	1,47,180
1050	750	570	425	1NO	1NC	AF750-30-11**	1SFL637001R□□11 ■	2,14,630
1260	-	-	-	1NO	1NC	AF1250-30-11**	1SFL647001R□□11	Upon request
1350	860	-	500	1NO	1NC	AF1350-30-11**	1SFL657001R□□11	
1650	1050	-	600	1NO	1NC	AF1650-30-11**	1SFL677001R□□11	
2050	-	-	-	1NO	1NC	AF2050-30-11**	1SFL707001R□□11	
2650	-	-	-	1NO	1NC	AF2650-30-11**	1SFL667001R□□11	
2850	-	-	-	1NO	1NC	AF2850-30-11**	1SFL687001R□□11	

Complete the contactor type code by replacing ** with desired coil voltage, AF contactors have advanced electronic coil interface with wideband AC/DC coil

Coil voltages and codes: A09 ... A185 range

Voltage	Voltage	Code
□□ V - 50Hz	□□ V - 60Hz	□□
24	24	8 1 ■
110	110 ... 120	8 4 ■
220 ... 230	230 ... 240	8 0 ■
400 ... 415	415 ... 440	8 6 ■

New AF205...AF370 range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	V DC	□□
24...60	20...60	1 1
48...130	48...130	1 2
100...250	100...250	1 3
250...500	250...500	1 4

AF400...AF1250 range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	V DC	□□
-	24...60	6 8
48...130	48...130	6 9
100...250	100...250	7 0
250...500	250...500	7 1

AF1350...AF2850 range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	DC	□□
100...250	100...250	7 0

Note: For non-standard coil voltage, other than this contact us for price.

4 pole contactors: AC operated



Contactors: 4-pole (AC operated)

Rating at 415V AC1 Amps	Main contact arrangement		Auxiliary contacts		Type code reference	Ordering code	L.P.(₹)
25	4NO	-	-	-	A09-40-00 **	1SBL141201R□□00 ■	1,640
25	2NO	2NC	-	-	A09-22-00 **	1SBL141501R□□00 ■	1,940
30	4NO	-	-	-	A16-40-00 **	1SBL181201R□□00 ■	1,730
30	2NO	2NC	-	-	A16-22-00 **	1SBL181501R□□00 ■	2,050
45	4NO	-	-	-	A26-40-00 **	1SBL241201R□□00 ■	3,110
45	2NO	2NC	-	-	A26-22-00 **	1SBL241501R□□00 ■	3,890
70	4NO	-	-	-	A45-40-00**	1SBL331201R□□00 ■	8,320
70	2NO	2NC	-	-	A45-22-00**	1SBL331501R□□00	11,670
100	4NO	-	-	-	A50-40-00**	1SBL351201R□□00 ■	11,670
125	4NO	-	-	-	A75-40-00**	1SBL411201R□□00 ■	15,530
125	2NO	2NC	-	-	A75-22-00**	1SBL411501R□□00	17,790
160	4NO	-	-	-	AF116-40-00	1SFL427102R□□00	26,670
200	4NO	-	-	-	AF140-40-00	1SFL447102R□□00	33,100
275	4NO	-	-	-	AF190-40-00	1SFL487102R□□00 ■	48,090
350	4NO	-	-	-	AF205-40-00	1SFL527102R□□00 ■	57,340
400	4NO	-	-	-	AF265-40-00	1SFL547102R□□00 ■	68,130
500	4NO	-	-	-	AF305-40-00	1SFL587102R□□00 ■	83,910
525	4NO	-	-	-	AF370-40-00	1SFL607102R□□00 ■	93,620
800	4NO	-	1NO	1NC	EK550-40-11 **	SK827041 - □□ ■	1,44,100
1000	4NO	-	1NO	1NC	EK1000-40-11 **	SK827044 - □□	2,00,480

Complete the contactor type code by replacing ** with desired coil voltage

Coil voltages and codes:

A09 ... A 75 range

Voltage	Voltage	Code
V - 50Hz	V - 60Hz	□□
24	24	8 1
110	110 ... 120	8 4
220 ... 230	230 ... 240	8 0
400 ... 415	415 ... 440	8 6

Note: For non-standard coil voltage, other than this contact us for price.

Coil voltages and codes: EK550 ... EK1000

Voltage	Voltage	Code
□□ V - 50Hz	□□ V - 60Hz	□□
-	110	A E
110	120	A F
220 ... 230	*	A L ■
230 ... 240	-	A M
400 ... 415	-	A R

■ Stock items

Coil voltages and codes:

New AF116 - AF370 (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	V DC	□□
24...60	20...60	1 1
48...130	48...130	1 2
100...250	100...250	1 3
250...500	250...500	1 4

3 pole contactors AL and TAL range: DC operated



AL contactors

AC 1 duty Amps	AC3 rating at 415V			Auxiliary contacts		Type code reference	Ordering code	L.P.(₹)
	Amps	hP	kW					
25	9	5	4	1NO	-	AL9-30-10	1SBL143001R□□10 ■	2,020
25	9	5	4	-	1NC	AL9-30-01	1SBL143001R□□01 ■	2,020
27	12	7.5	5.5	1NO	-	AL12-30-10	1SBL163001R□□10	2,260
27	12	7.5	5.5	-	1NC	AL12-30-01	1SBL163001R□□01	2,260
30	17	10	7.5	1NO	-	AL16-30-10	1SBL183001R□□10 ■	2,750
30	17	10	7.5	-	1NC	AL16-30-01	1SBL183001R□□01	2,750
45	26	20	11	1NO	-	AL26-30-10	1SBL243001R□□10 ■	3,830
45	26	20	11	-	1NC	AL26-30-01	1SBL243001R□□01	3,830
55	32	25	15	1NO	-	AL30-30-10	1SBL283001R□□10	7,650
55	32	25	15	-	1NC	AL30-30-01	1SBL283001R□□01	7,650
60	37	30	18.5	1NO	-	AL40-30-10	1SBL323001R□□10	9,610
60	37	30	18.5	-	1NC	AL40-30-01	1SBL323001R□□01	9,610

TAL contactors



AC 1 duty Amps	AC3 rating at 415V			Auxiliary contacts		Type code reference	Ordering code	L.P.(₹)
	Amps	hP	kW					
25	9	5	4	1NO	-	TAL9-30-10	1SBL143061R□□10 ■	2,430
25	9	5	4	-	1NC	TAL9-30-01	1SBL163061R□□10 ■	2,430
27	12	7.5	5.5	1NO	-	TAL12-30-10	1SBL163061R□□10	2,980
27	12	7.5	5.5	-	1NC	TAL12-30-01	1SBL163061R□□01	2,980
30	17	10	7.5	1NO	-	TAL16-30-10	1SBL183061R□□10 ■	3,190
30	17	10	7.5	-	1NC	TAL16-30-01	1SBL183061R□□01 ■	3,190
45	26	20	11	1NO	-	TAL26-30-10	1SBL243061R□□10 ■	4,360
45	26	20	11	-	1NC	TAL26-30-01	1SBL243061R□□01	4,360
55	32	25	15	1NO	-	TAL30-30-10	1SBL283061R□□10	8,580
55	32	25	15	-	1NC	TAL30-30-01	1SBL283061R□□01	8,580
60	37	30	18.5	1NO	-	TAL40-30-10	1SBL323061R□□10 ■	9,570
60	37	30	18.5	-	1NC	TAL40-30-01	1SBL323061R□□01	9,570

Coil voltages and codes: AL

Voltage	Code
□□ V DC	□□
24	8 1
110	8 6 ■
240	8 9

Coil voltages and codes: TAL

Voltage	Code
□□ V DC	□□
77...143	6 2 ■

Other voltages: contact nearest ABB sales office.

Contactors for special application - capacitors switching



Contactors for capacitor switching: 3 pole – AC operated:

kVAR Rating at 415V	Auxiliary contacts	Type code reference	Ordering code	L.P.(₹)
Type UA...RA with in-built damping resistors:				
12.5	1NO	UA16-30-10RA **	1SBL181024R□□10 ■	2,970
22	1NO	UA26-30-10RA **	1SBL241024R□□10 ■	4,950
30	1NO	UA30-30-10RA**	1SBL281024R□□10 ■	5,670
40	--	UA50-30-00RA	1SBL351024R□□10 ■	15,690
50	--	UA63-30-00RA**	1SBL371024R□□00 ■	16,880
60	--	UA75-30-00RA**	1SBL411024R□□00 ■	19,550
70	--	UA95-30-00RA**	1SFL431024R□□00 ■	20,450
80	--	UA110-30-00RA**	1SFL451024R□□00 ■	24,470

Type UA...RA with in-built damping resistors

Complete the contactor type code by replacing ** with desired coil voltage.

Peak current $\hat{I} \leq 100$ times the rms current

kVAR rating at 415V	Max peak current \hat{I}	Auxiliary contacts fitted		Type	Ordering code	L.P.(₹)
kvar	kA	NO	NC			
12.5	1.8	1	0	UA16-30-10	1SBL181022R□□10 ■	2,420
20	3	1	0	UA26-30-10	1SBL241022R□□10 ■	2,990
27.5	33.5	1	0	UA30-30-10	1SBL281022R□□10 ■	5,140
33	5	0	0	UA50-30-00	1SBL351022R□□00 ■	11,540
45	6.5	0	0	UA63-30-00	1SBL371022R□□00 ■	12,150
50	7.5	0	0	UA75-30-00	1SBL411022R□□00 ■	14,520
65	9.3	1	1	UA95-30-11	1SFL431022R□□11 ■	18,230
75	10.5	1	1	UA110-30-11	1SFL451022R□□11 ■	22,920

Single step - Peak current $\hat{I} \leq 30$ times the RMS current

kVAR Rating at 415V	Type code	Ordering code	L.P.(₹)
60	A95-30-11**	1SFL431001R□□11 ■	18,680
70	A110-30-11**	1SFL451001R□□11 ■	23,550
90	A145-30-11**	1SFL471001R□□11 ■	30,070
110	A185-30-11**	1SFL491001R□□11 ■	37,150
130	AF205-30-11**	1SFL527002R□□11 ■	42,070
145	AF265-30-11**	1SFL547002R□□11 ■	46,990
165	AF305-30-11**	1SFL587002R□□11 ■	55,560
200	AF370-30-11**	1SFL607002R□□11 ■	72,170
210	AF400-30-11**	1SFL577001R□□11 ■	79,610
240	AF460-30-11**	1SFL597001R□□11 ■	99,850
285	AF580-30-11**	1SFL617001R□□11 ■	1,47,180
400	AF750-30-11**	1SFL637001R□□11 ■	2,14,630

Note: Refer page no 101 for selection of AF contactor coil voltage

Coil voltages and codes UA...RA & UA

Voltage	Voltage	Code
□□□ V - 50Hz	□□□ V - 60Hz	□□
24	24	8 1 ■
110	110 ... 120	8 4 ■
220 ... 230	230 ... 240	8 0 ■
400 ... 415	415 ... 440	8 6 ■

■ Stock items

Contactors for DC circuit switching: AC/DC operated

Coil	Current ratings at 440V DC			Type code reference	Ordering code	L.P.(₹)
	DC-1	DC-3	DC-5			
AC	100A	85A	50A	GA75-10-11 **	1SBL411025R□□11	Upon request
DC	100A	85A	50A	GAE75-10-11 **	1SBL419025R□□11	



Complete the contactor type code by replacing ** with desired coil voltage

Coil	Current ratings at 1000V DC	Type code reference	Ordering code	L.P.(₹)
	DC-1 L/R 1 ms			
AC/DC	275A	GAF185-10-11	1SFL497025R□□11	Upon request
	450A	GAF300-10-11	1SFL557025R□□11	
	700A	GAF460-10-11	1SFL597025R□□11	
	1050A	GAF750-10-11	1SFL637025R□□11	
	1250A	GAF1250-10-11	1SFL647025R□□11	
	1650A	GAF1650-10-11	1SFL677025R□□11	
	2050A	GAF2050-10-11	1SFL707025R□□11	

For DC3, DC5 ratings refer technical catalog


Coil voltages and codes:

GA 75

Voltage	Voltage	Code
 V - 50Hz	 V - 60Hz	□□
24	24	8 1
110	110 ... 120	8 4
220 ... 230	230 ... 240	8 0
400 ... 415	415 ... 440	8 6



Coil voltages and codes:

GAE 75

Voltage	Code
 V d.c.	□□
12	8 0
24	8 2
42	8 1
110	8 6
240	8 9

Coil voltages and codes:

GAF range (AC/DC operated)

Voltage	Voltage	Code
 V 50/60 Hz	 V DC	□□
-	24...60	6 8
48...130	48...130	6 9
100...250	100...250	7 0
250...500	250...500	7 1

Accessories for contactors



Auxiliary contact block

Description	Mounting on contactors	Contact configuration		Type code reference	Ordering code	L.P.(₹)
		NO	NC			
Front mounted single pole add-on blocks	A9...A110 AL9...AL40, TAL9...TAL40 N,NL & UA	1NO	-	CA5-10	1SBN010010R1010 ■	220
		-	1NC	CA5-01	1SBN010010R1001 ■	220
		4NO	-	CA 5-40 E	1SBN010040R1040	1,030
		3NO	1NC	CA 5-31 E	1SBN010040R1031	
		2NO	2NC	CA 5-22 E	1SBN010040R1022 ■	
Side mounted 2 pole add-on blocks	A9...A75, AL9...AL40, TAL9...TAL40, N, NL & UA 16..75	4NC	CA 5-04 E	1SBN010040R1004		
		1NO	1NC	CAL5-11	1SBN010020R1011 ■	750
	A95...A185, UA95...UA110, AF400...AF2050	1NO	1NC	CAL18-11	1SFN010720R1011 ■	850
	A145...A185 AF400...AF2050	1NO	1NC	CAL18-11B	1SFN010720R3311 ■	
	AF205...AF370	1NO	1NC	CAL19-11	1SFN010820R1011 ■	
		1NO	1NC	CAL 19-11B	1SFN010820R3311	

Auxiliary contact blocks for EK range of contactors:

Description	Mounting on contactors	Contact configuration		Type code reference	Ordering code	L.P.(₹)
		NO	NC			
Side mounting Two pole auxiliary contact blocks	EK110 ... EK1000	1NO	1NC	CAL16-11A	SK829002-A ■	850
		1NO	1NC	CAL16-11B	SK829002-B ■	
		1NO	1NC	CAL16-11C	SK829002-C	
		1NO	1NC	CAL16-11D	SK829002-D	

* Refer technical catalogue for proper selection.

■ Stock items

Accessories for contactors



Auxiliary contact block

Description	Mounting on contactors	Contact configuration		Type code reference	Ordering code	L.P. (₹)
		NO	NC			
Front mounted single pole add-on blocks	AX09...AX150, NX 4-pole	1NO	-	CA5X-10	1SBN019010R1010 ■	210
		-	1NC	CA5X-01	1SBN019010R1001 ■	210
Front mounted Four pole add-on blocks	AX09...AX150, NX 4-pole	2NO	2NC	CA5X-22E	1SBN019040R1022 ■	760
		3NO	1NC	CA5X-31E	1SBN019040R1031	
		4NO	-	CA5X-40E	1SBN019040R1040	
		-	4NC	CA5X-04E	1SBN019040R1004	
Side mounted 2 pole add-on blocks	AX09...AX80, NX 4-pole	1NO	1NC	CAL5X-11	1SBN019020R1011 ■	680
	AX95...AX205	1NO	1NC	CAL18X-11	1SFN019820R1011 ■	700
		1NO	1NC	CAL18X-11B	1SFN019820R3311 ■	
	AX260...AX370	1NO	1NC	CAL19-11	1SFN010820R1011	820
		1NO	1NC	CAL19-11B	1SFN010820R3311	820

Surge suppressors



For contactor types	Voltage range	Type code reference	Ordering code	L.P. (₹)
AL9...AL40, TAL9...TAL40, NL	12...32 DC	RT5/32	1SBN050020R1000 ■	870
	25...65 DC	RT5/65	1SBN050020R1001	
	50...90 DC	RT5/90	1SBN050020R1002	
	77...150 DC	RT5/150	1SBN050020R1003 ■	
	150...264 DC	RT5/264	1SBN050020R1004	
A9...A110, AL9...AL40, TAL9...TAL40, N/NL AX09...AX150	24...50V AC/DC	RV5/50	1SBN050010R1000	870
	50...133V AC/DC	RV5/133	1SBN050010R1001	
	110...250V AC/DC	RV5/250	1SBN050010R1002	
	250...440V AC/DC	RV5/440	1SBN050010R1003	
A9...A40, N AX09...AX40	24...50V AC	RC5-1/50	1SBN050100R1000	870
	50...133V AC	RC5-1/133	1SBN050100R1001	
	110...250V AC	RC5-1/250	1SBN050100R1002 ■	
	250...440V AC	RC5-1/440	1SBN050100R1003 ■	
A45...A110 AX50...AX150	24...50V AC	RC5-2/50	1SBN050200R1000	870
	50...133V AC	RC5-2/133	1SBN050200R1001	
	110...250V AC	RC5-2/250	1SBN050200R1002 ■	
	250...440V AC	RC5-2/440	1SBN050200R1003 ■	
A145...A185, AX185...AX205	250...440	RC5-3/440	1SFN050300R1003 ■	2,510
EK550...EK1000	48...110V/AC	RC-EH 800/110	SK829007-C	3,710
	220...600V/AC	RC-EH 800/600	SK829007-D	

■ Stock items

Accessories for contactors



VM5-1



VM300

Mechanical interlocks

For contactor types	Description	Type code reference	Ordering code	L.P.(₹)
A9...A40, AL9...AL40 AX09...AX40	Horizontal Mechanical Interlock	VM5-1	1SBN030100R1000 ■	570
A9...A40, AL9...AL40 AX09...AX40	Horizontal Mechanical & Electrical Interlock with 2NC contacts	VE5-1	1SBN030110R1000 ■	850
A30...A110 AX50...AX115	Horizontal Mechanical & Electrical Interlock with 2NC contacts	VE5-2	1SBN030210R1000 ■	1,720
A95...A185, AX185...AX205	Horizontal with 2NC contacts	VM300H	1SFN034700R1000	3,610
EK110...EK150	Horizontal Mechanical Interlock	VH145	SK829071-A	4,790
EK175...EK210	Horizontal Mechanical Interlock	VH300	SK829071-B	5,580
AF116...AF146 and AF190. AF205	Horizontal Mechanical Interlock	VM140/190	1SFN034403R1000 ■	3,610
AF190, AF205 and AF265 ... AF370	Horizontal Mechanical Interlock	VM205/265	1SFN035203R1000 ■	3,610
AF116...AF370 AX260...AX370	Horizontal Mechanical Interlock	VM19	1SFN030300R1000	3,730

Note: Refer technical catalogue for proper selection.

Mechanical latching units description

For converting standard contactors into latched contactors. The WB75-A block contains a mechanical latching device with electromagnetic impulse unlatching (AC or DC) or manual unlatching.

Ordering details



For contactors	Rated control circuit voltage U _c		Type	Ordering code	L.P.(₹)
	V 50 Hz or DC	V 60 Hz			
N, NL, A9-A75	24	24...28	WB75-A	FPTN372726R1001	6,340
	220...230	220...255	WB75-A	FPTN372726R1006	6,340

For contactors	Time delay range selected by switch	Delay type	Auxiliary contacts	Type	Ordering code	L.P.(₹)
Electronic timers						
A9...A75	0.1...1 s	ON-delay	1	TEF5 ON	1SBN020312R1000	6,590
	1...10 s 10...100 s	OFF-delay	1	TEF5 OFF	1SBN020314R1000	6,270

Contactors: Wide band AC/DC operated

NF/AF contactors

Wide band AC/DC operated - with screw terminals


Description

- NF/AF contactors include an electronic coil interface accepting a wide control voltage U_c min. ... U_c max. only four coils cover control voltages between 24...500 V 50/60 Hz or 20...500 V DC
- NF/AF contactors can manage large control voltage variations. One coil (e.g. 100...250 V 50/60 Hz - DC) can be used for different control voltages used worldwide without any coil change.
- NF...Z/AF...Z contactor equipped with a Z coil type allows direct control by 24 V DC 500 mA PLC-output and obtain a reduced holding coil consumption.
- NF/AF contactors have built-in surge protection and do not require additional surge suppressors.



Innovative solution from ABB

- Electronically controlled coil
- Distinct drop out- and pick up value
- 20 ms sags and dip immunity
- Fulfills SEMI - F47- 0200 surge suppressors
- Specification for processing equipment regarding voltage drop immunity

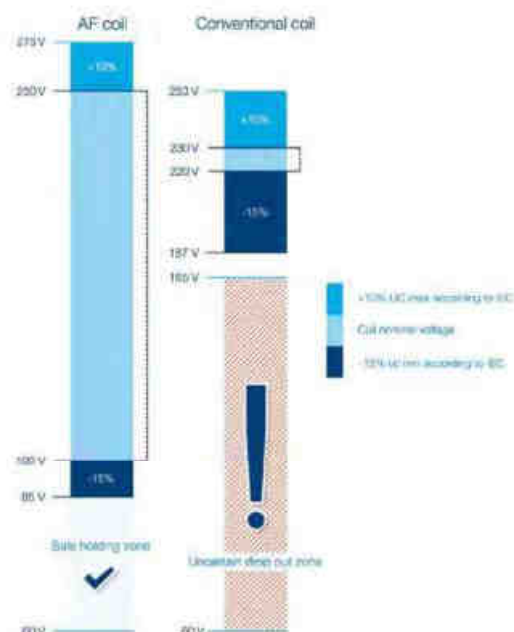

3 pole contactors AF range: Wide band AC/DC operated

AF contactors are built in with:

- Universal coil operable on wide band AC / DC voltages
- Surge suppressors
- Low power consumption coil



AC1duty Amps	AC3 rating at 415V			Auxiliary contacts		Type code	Ordering code	L.P.(₹)
	Amps	hP	kW					
25	9	5.5	4	1NO	-	AF09-30-10-□□	1SBL137001R□□10 ■	2,620
				-	1NC	AF09-30-01-□□	1SBL137001R□□01 ■	2,620
28	12	7.5	5.5	1NO	-	AF12-30-10-□□	1SBL157001R□□10 ■	2,770
				-	1NC	AF12-30-01-□□	1SBL157001R□□01 ■	2,770
30	18	12.5	7.5	1NO	-	AF16-30-10-□□	1SBL177001R□□10 ■	3,410
				-	1NC	AF16-30-01-□□	1SBL177001R□□01 ■	3,410
45	26	15	11	-	-	AF26-30-00-□□	1SBL237001R□□00 ■	4,230
50	32	20	18	-	-	AF30-30-00-□□	1SBL277001R□□00 ■	8,900
50	38	25	18.5	-	-	AF38-30-00-□□	1SBL297001R□□00 ■	10,130
70	40	30	18.5	-	-	AF40-30-00-□□	1SBL347001R□□00 ■	10,970
100	53	40	22	-	-	AF52-30-00-□□	1SBL367001R□□00 ■	13,930
105	65	50	30	-	-	AF65-30-00-□□	1SBL387001R□□00 ■	15,980
125	80	60	37	-	-	AF80-30-00-□□	1SBL397001R□□00 ■	19,420
130	96	70	45	-	-	AF96-30-00-□□	1SBL407001R□□00 ■	23,340
160	116	75	55	1NO	1NC	AF116-30-11-□□	1SFL427001R□□11 ■	25,940
200	140	100	75	1NO	1NC	AF140-30-11-□□	1SFL447001R□□11 ■	32,270
225	146	100	75	1NO	1NC	AF146-30-11-□□	1SFL467001R□□11 ■	33,190
275	190	120	90	1NO	1NC	AF190-30-11-□□	1SFL487002R□□11 ■	39,310
350	205	150	110	1NO	1NC	AF205-30-11-□□	1SFL527002R□□11 ■	42,070
400	265	175	140	1NO	1NC	AF265-30-11-□□	1SFL547002R□□11 ■	46,990
500	305	215	160	1NO	1NC	AF305-30-11-□□	1SFL587002R□□11 ■	55,560
600	370	270	200	1NO	1NC	AF370-30-11-□□	1SFL607002R□□11 ■	72,170
600	400	300	220	1NO	1NC	AF400-30-11**	1SFL577001R□□11 ■	79,610
700	460	340	250	1NO	1NC	AF460-30-11**	1SFL597001R□□11 ■	99,850
800	580	470	355	1NO	1NC	AF580-30-11**	1SFL617001R□□11 ■	1,47,180
1050	750	570	425	1NO	1NC	AF750-30-11**	1SFL637001R□□11 ■	2,14,630
1260	-	-	-	1NO	1NC	AF1250-30-11**	1SFL647001R□□11 ■	Upon request
1350	860	-	500	1NO	1NC	AF1350-30-11**	1SFL657001R□□11 ■	
1650	1050	-	600	1NO	1NC	AF1650-30-11**	1SFL677001R□□11 ■	
2050	-	-	-	1NO	1NC	AF2050-30-11**	1SFL707001R□□11 ■	
2650	-	-	-	1NO	1NC	AF2650-30-11**	1SFL667001R□□11 ■	
2850	-	-	-	1NO	1NC	AF2850-30-11**	1SFL687001R□□11 ■	

Complete the contactor type code by replacing ** with desired coil voltage, AF contactors have advanced electronic coil interface with wideband AC/DC coil

Coil voltages and codes:

New AF09...AF370 range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	V DC	□□
24...60	20...60	1 1 ■
48...130	48...130	1 2 ■
100...250	100...250	1 3 ■
250...500	250...500	1 4 ■

AF400...AF1250 range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	V DC	□□
-	24...60	6 8
48...130	48...130	6 9
100...250	100...250	7 0 ■
250...500	250...500	7 1 ■

AF1350...AF2850 range (AC/DC operated)

Voltage	Voltage	Code
V 50/60 Hz	DC	□□
100...250	100...250	7 0

Note: For non-standard coil voltage, other than this contact us for price.

4 pole contactors: Wide band AC/DC operated

New AF Contactors: 4 pole – AC / DC Operated

Rating at 415V AC1 Amps	Main contact arrangement	Auxiliary contacts	Type code reference	Ordering code	L.P.(₹)
25	4NO	-	AF09-40-00-□□	1SBL137201R□□00 ■	2,790
	2NO	2NC	AF09-22-00-□□	1SBL137501R□□00	3,500
30	4NO	-	AF16-40-00-□□	1SBL177201R□□00	3,500
	2NO	2NC	AF16-22-00-□□	1SBL177501R□□00 ■	4,290
45	4NO	-	AF26-40-00-□□	1SBL237201R□□00	5,310
	2NO	2NC	AF26-22-00-□□	1SBL237501R□□00	6,560
55	4NO	-	AF38-40-00-□□	1SBL297201R□□00 ■	10,890
	2NO	2NC	AF38-22-00-□□	1SBL297501R□□00	13,240
70	4NO	-	AF40-40-00-□□	1SBL347201R□□00	17,240
	2NO	2NC	AF40-22-00-□□	1SBL347501R□□00	19,070
100	4NO	-	AF52-40-00-□□	1SBL367201R□□00 ■	18,260
125	4NO	-	AF80-40-00-□□	1SBL397201R□□00	22,200
	2NO	2NC	AF80-22-00-□□	1SBL397501R□□00	24,880
160	4NO	-	AF116-40-00-□□	1SFL427102R□□00 ■	26,670
200	4NO	-	AF140-40-00-□□	1SFL447102R□□00 ■	33,100
275	4NO	-	AF190-40-00-□□	1SFL487102R□□00 ■	48,090
350	4NO	-	AF205-40-00-□□	1SFL527102R□□00 ■	57,340
400	4NO	-	AF265-40-00-□□	1SFL547102R□□00 ■	68,130
500	4NO	-	AF305-40-00-□□	1SFL587102R□□00 ■	83,910
525	4NO	-	AF370-40-00-□□	1SFL607102R□□00 ■	93,620

Coil voltages and codes: New AF range (AC/DC operated)

Voltage V 50/60 Hz	Voltage V DC	Code □□
24...60	20...60	1 1 ■
48...130	48...130	1 2 ■
100...250	100...250	1 3 ■
250...500	250...500	1 4 ■

Accessories for AF contactors

Auxiliary contact block



Description	Mounting on contactors	Contact configuration		Type code reference	Ordering code	L.P.(₹)
		NO	NC			
Front mounted 1 pole add-on blocks	AF09....AF96 / NF	1NO	-	CA4-10	1SBN010110R1010 ■	250
		-	1NC	CA4-01	1SBN010110R1001 ■	250
Front mounted 4 pole add-on blocks	AF09....AF80 / NF	4NO	-	CA4-40E	1SBN010140R1040 ■	1,050
		3NO	1NC	CA4-31E	1SBN010140R1031	1,050
		2NO	2NC	CA4-22E	1SBN010140R1022 ■	1,050
		-	4NC	CA4-04E	1SBN010140R1004	1,050
Side mounted 2 pole add-on blocks	AF09....AF96 / NF	1NO	1NC	CAL4-11	1SBN010120R1011 ■	670
	AF96...AF370	1NO	1NC	CAL19-11	1SFN010820R1011 ■	790
		1NO	1NC	CAL19-11B	1SFN010820R3311 ■	790

* Refer technical catalogue for proper selection.

■ Stock items

Accessories for AF contactors



Mechanical interlocks

Description	For contactor types	Type Code reference	Ordering code	L.P.(₹)
Horizontal Mechanical Interlock	AF09...AF38	VM 4	1SBN030105T1000	690
Horizontal Mechanical & Electrical Interlock	AF09...AF38	VEM 4	1SBN030111R1000	1,220
Horizontal Mechanical Interlock	AF40...AF96	VM96-4	1SBN033405T1000	2,490
Horizontal Mechanical Interlock	AF116...AF146 and AF190, AF205	VM140/190	1SFN034403R1000	3,610
Horizontal Mechanical Interlock	AF190, AF205 and AF265 ... AF370	VM205/265	1SFN034403R1000	3,610
Horizontal Mechanical Interlock	AF116...AF370	VM19	1SFN030300R1000	3,720

Note: Refer technical catalogue for proper selection.

Ordering details

For contactors	Rated control circuit voltage Uc	Type	Ordering code	L.P.(₹)
NF(Z),AF(Z)09....38,AF40...65	24V DC	WA4-10	1SBN040100R1010	2,700
NF(Z),AF(Z)09....38,AF40...65	24-60V50/60HZ-DC	WA4-11	1SBN040100R1011	2,700
NF(Z),AF(Z)09....38,AF40...65	48-130V50/60HZ-DC	WA4-12	1SBN040100R1012	2,700
NF(Z),AF(Z)09....38,AF40...65	100-250V50/60HZ-DC	WA4-13	1SBN040100R1013	2,700
NF(Z),AF(Z)09....38,AF40...65	250-500V50/60HZ-DC	WA4-14	1SBN040100R1014	2,700
AF80....96	24-60V50/60HZ-DC	WA4-96-11	1SBN040200R1011	2,700
AF80....96	48-130V50/60HZ-DC	WA4-96-12	1SBN040200R1012	2,700
AF80....96	100-250V50/60HZ-DC	WA4-96-13	1SBN040200R1013	2,700
AF80....96	250-500V50/60HZ-DC	WA4-96-14	1SBN040200R1014	2,700



Electronic timers

For contactor types	Time delay range selected by switch	Delay type	Auxiliary contacts	Type	Ordering code	L.P.(₹)
AF09 ... AF96	0.1...1 s	ON-delay	1NO + 1NC	TEF4-ON	1SBN020112R1000	6,530
	1...10 s	OFF-delay	1NO + 1NC	TEF4-OFF	1SBN020114R1000	6,210

Note: Rated control circuit voltage Uc 24...240 V 50/60 Hz or DC.

Connecting links with manual motor starters

For contactor types	Used with	Type	Ordering code	L.P.(₹)
AF09 ... AF16	MS116-0.16 ... MS116-25, MS132-0.16 ... MS132-25	BEA16-4	1SBN081306T1000	480
AF26 ... AF30	MS116-0.16 ... MS116-16, MS132-0.16 ... MS132-10	BEA26-4	1SBN082306T1000	550
	MS116-20 ... MS116-32, MS132-12 ... MS132-32	BEA38-4	1SBN082306T2000	590

Connection sets for reversing contactors


For contactor types	Type	Ordering code	L.P.(₹)
AF09 ... AF16	BER16-4	1SBN081311R1000	1,210
AF26 ... AF30	BER38-4	1SBN082311R1000	1,640
AF40 ... AF65	BER65-4	1SBN083411R1000	1,960
AF80 ... AF96	BER96-4	1SBN083911R1000	3,410

Connection sets for star-delta starting

For contactor types	Type	Ordering code	L.P.(₹)
AF09 ... AF16	BEY16-4	1SBN081313R2000	1,650
AF26 ... AF30	BEY38-4	1SBN082713R2000	2,550
AF40 ... AF65	BEY65-4	1SBN083413R2000	3,290
AF80 ... AF96	BEY96-4	1SBN083913R2000	4,220

AFC contactors for AC control applications **NEW**

ABB's AF platform is now extended with AFC contactors bringing AC control to the offer. It provides an additional choice, fitting to even more solutions up to 18.5 kW AC-3. With a single footprint, design work is simpler and installation time is shorter – all with the advantage of ABB's trusted quality and global support.

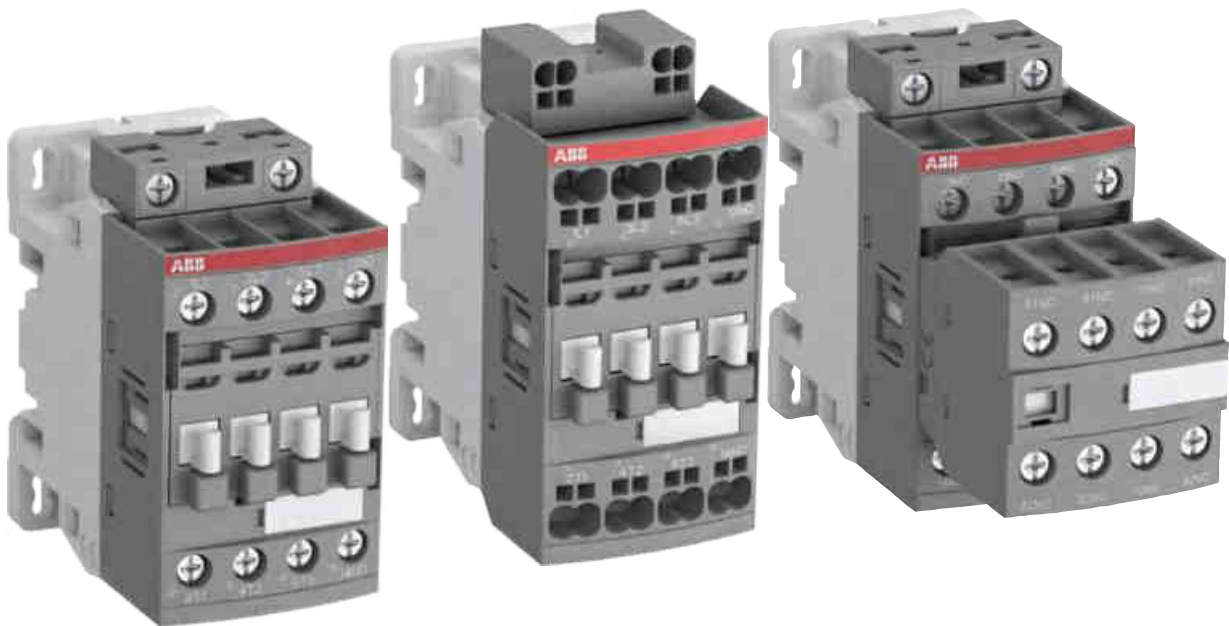

Speed up your projects

One modular design

AF platform shares the same footprint – giving standalone contactors and starter combinations the same space requirements. The short circuit performance is equivalent, making it possible to use one common circuit design for multiple applications. Plug-and-play it – save time!



Optimum interface

One contactor platform

AF platform is available with screw or Push-in Spring terminals and has a common range of accessories and protection devices. Reducing stock levels, minimizing mounting errors and maximizing interchangeability - the new AFC contactors are good for business.



Global availability

Expand your market

Use ABB's global distribution channels to source your AFC contactors. The range is compliant with all major inter-national standards and approvals and suitable for use in most countries. Supported by ABB's global service network all around the world, get peace of mind.



Optimized operating time for AC control applications

Within the ABB's AF platform, AFC contactors offer an optimized operating time, providing more alternatives to motor starters.

For installations requiring electromagnetic control

Tender specifications or existing customer applications might require control panels with AC electromagnetic coil control - AFC contactors offer the perfect solution.

AFC contactors for AC control applications **NEW**

Flexible and safe


Part of the AF platform

AFC contactors are an extension of the AF platform. Sharing same footprint and having equivalent electrical performance, installation design and maintenance are easier and faster. Protection devices (manual motor starters, overloads relays), accessories (auxiliary contacts, electronic timers, ...) and connection kits (direct-on-line, reversing, start delta) are common to the entire platform.



Great flexibility for coil terminal access and surge suppressor

AFC contactors offer free choice of coil terminal access from top, bottom or front. Surge suppressor can be mounted from top or bottom.

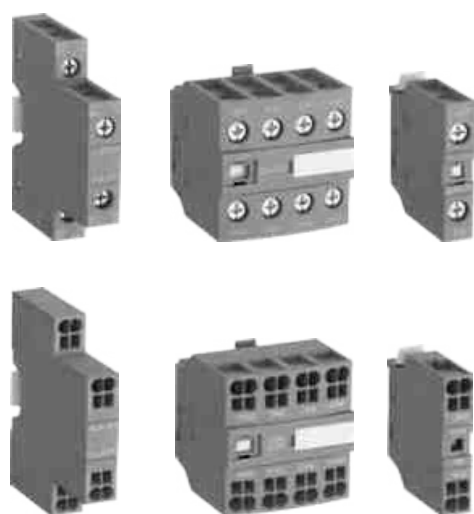

Compatible and easy to use accessories

1-pole, 2-pole and 4-pole auxiliary contact blocks (front or side mounted) are available with screw and Push-in Spring terminals: They can be mounted on every contactor of the AF platform, whatever its terminal connection type.



Easy, fast and secure starters assembly


The AF contactor range is perfect for motor starting applications and for solutions where space is limited. You can create any motor starting type and save assembly time with a complete range of accessories and connection sets.



Protect from overload in all conditions

Select thermal overload relays (trip class 10) or electronic overload relays (trip class 10E, 20E, 30E in the same product) to protect your motors against overload and phase failure.

Accessories for AF contactors

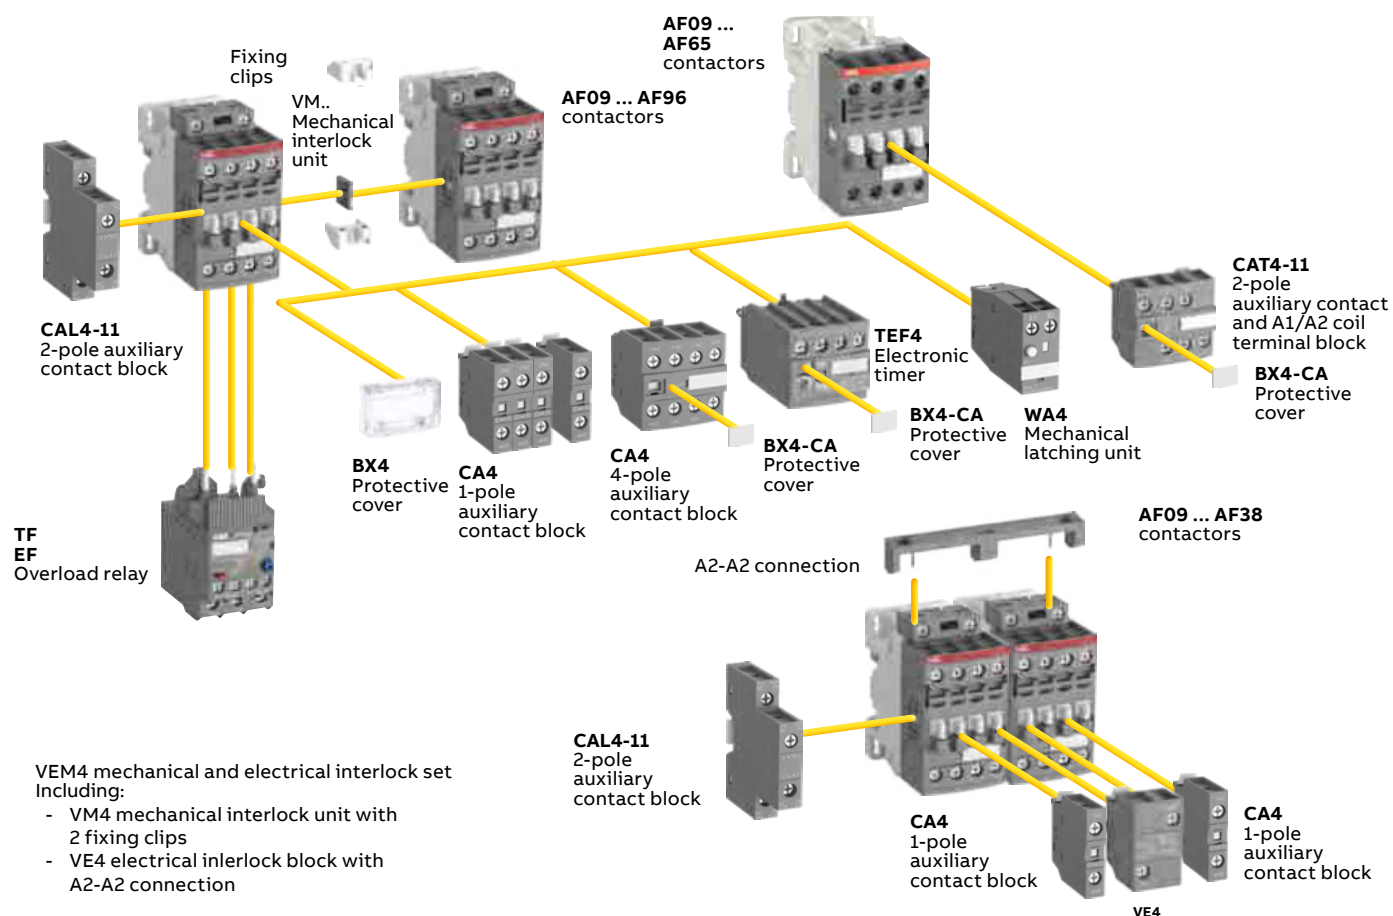

AF the premium range



The AF contactor is compact

The AF contactor is compact in size and has had its width reduced by up to 30% thanks to an 80% reduction of the coil's energy consumption.

The AF contactor is flexible

AF09...AF370 is perfect for motor starting applications and for solutions where space is limited. Interlocked reversing pairs require no spacing between contactors can fit more functions meaning you fit into cabinets or other small enclosures.




Powerful light switching made easy **NEW** ESB and EN installation contactors



ABB's hum-free installation contactor designs offer a wide range of ratings from 16 A to 100 A. With an innovative AC/DC coil design that eliminates hum, a broad selection of common accessories as well as manual and automatic versions, ESB..N contactors cover all your needs in both domestic and residential applications. Find out more at abb.com/lowvoltage

ABB



Easy status indication

red: on

green: off

EH-04 auxiliary contact block

- tool-free mounting
- clip on the left side

Terminals IP 20




OFF
AUTO
ON




Control with manual
override functionality






Field for label






ESB and EN Installation contactors





ABB's installation contactor range comes with a host of features to make installation and maintenance easier. A mechanical indicator shows the status in green or red color to make system diagnostics quicker. Some speciality types also feature a manual override functionality with a toggle switch providing independent control. Accessories such as auxiliaries, space holders, as well as safety covers can be mounted tool-free onto the contactor.



Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	1	24	ESB16-20N-01	1SBE11111R0120	2,860
	1	230	ESB16-20N-06	1SBE11111R0620	2,860
	1	24	ESB16-02N-01	1SBE11111R0102	2,990
	1	230	ESB16-02N-06	1SBE11111R0602	2,990
	1	24	ESB16-11N-01	1SBE11111R0111	2,920
	1	230	ESB16-11N-06	1SBE11111R0611	2,920

Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	1	24	ESB20-20N-01	1SBE12111R0120	3,170
	1	230	ESB20-20N-06	1SBE12111R0620	3,170
	1	24	ESB20-02N-01	1SBE12111R0102	3,310
	1	230	ESB20-02N-06	1SBE12111R0602	3,310
	1	24	ESB20-11N-01	1SBE12111R0111	3,200
	1	230	ESB20-11N-06	1SBE12111R0611	3,200


Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	2	24	ESB25-40N-01	1SAE23111R0140	3,230
	2	230 ... 240	ESB25-40N-06	1SAE23111R0640	3,230
	2	24	ESB25-04N-01	1SAE23111R0104	3,340
	2	230 ... 240	ESB25-04N-06	1SAE23111R0604	3,340
	2	24	ESB25-22N-01	1SAE23111R0122	3,340
	2	230 ... 240	ESB25-22N-06	1SAE23111R0622	3,340
	2	24	ESB25-31N-01	1SAE23111R0131	3,340
	2	230 ... 240	ESB25-31N-06	1SAE23111R0631	3,340
	2	24	ESB25-13N-01	1SAE23111R0113	3,340
	2	230 ... 240	ESB25-13N-06	1SAE23111R0613	3,340




Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	3	24	ESB40-40N-01	1SAE34111R0140	5,940
	3	230	ESB40-40N-06	1SAE34111R0640	5,940
	3	24	ESB40-22N-01	1SAE34111R0122	6,040
	3	230	ESB40-22N-06	1SAE34111R0622	6,040
	3	24	ESB40-31N-01	1SAE34111R0131	6,040
	3	230	ESB40-31N-06	1SAE34111R0631	6,040
	3	24	ESB40-30N-01	1SAE34111R0130	5,720
	3	230	ESB40-30N-06	1SAE34111R0630	5,720
	3	24	ESB40-20N-01	1SAE34111R0120	5,720
	3	230	ESB40-20N-06	1SAE34111R0620	5,510





Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	3	24	ESB63-40N-01	1SAE35111R0140	7,740
	3	230	ESB63-40N-06	1SAE35111R0640	7,740
	3	230	ESB63-31N-06	1SAE35111R0631	7,950
	3	230	ESB63-30N-06	1SAE35111R0630	7,530
	3	24	ESB63-20N-01	1SAE35111R0120	7,420
	3	230	ESB63-20N-06	1SAE35111R0620	7,420

Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	6	24	ESB100-40N-01	1SAE66111R0140	26,450
	6	230	ESB100-40N-06	1SAE66111R0640	26,450
	3	24	ESB100-20N-01	1SAE36111R0120	25,330
	3	230	ESB100-20N-06	1SAE36111R0620	25,330


ESB and EN Installation contactors

Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	1	24	EN20-20N-01	1SBE122111R0120	4,450
		230	EN20-20N-06	1SBE122111R0620	

Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	2	24	EN25- 40N- 01	1SAE232111R0140	13,300
		230 ... 240	EN25-40N-06	1SAE232111R0640	13,570
	2	24	EN25-31N-01	1SAE232111R0131	13,670
		230 ... 240	EN25-31N-06	1SAE232111R0631	13,670
	2	230 ... 240	EN25-30N-06	1SAE232111R0630	11,870

Main contacts	Width in number of modular spacings	Rated control circuit voltage ⁽¹⁾ V AC / DC	Type	Ordering code	L.P. (₹)
	3	24	EN40-40N-01	1SAE342111R0140	13,620
		230	EN40-40N-06	1SAE342111R0640	13,620
	3	24	EN40-31N-01	1SAE342111R0131	13,730
		230	EN40-31N-06	1SAE342111R0631	13,730
	3	230	EN40-30N-06	1SAE342111R0630	12,190
	3	230	EN40-20N-06	1SAE342111R0620	11,870

Auxiliary contact blocks

Auxiliary contacts	Suitable for	Type	Ordering code	L.P. (₹)
Single packaging				
	ESB16..N, ESB20..N, ESB25..N, ESB40..N, ESB63..N, ESB100..N, EN20..N, EN25..N, EN40..N	EH04-11N	1SAE901901R1011	1,050
		EH04-20N	1SAE901901R1020	1,050

Distant piece

Suitable for	Type	Ordering code	L.P. (₹)
Single packaging			
ESB25..N, ESB40..N, ESB63..N, EN25..N, EN40..N, ESB100..N, EN100..N	ESB-DIS	GHE3201902R0001	200

Mini contactors



Mini contactors with screw connection: 3 pole - AC operated

AC1 duty Amps	AC3 rating at 415V			Auxiliary contacts		Type code reference	Ordering code	L.P.(₹)
Amps	Amps	hP	kW					
16A	9	5.5	4	1NO	-	B06-30-10 **	GJL1211001R□10□ ■	1,270
16A	9	5.5	4	-	1NC	B06-30-01 **	GJL1211001R□01□ ■	
20A	12	7.5	5.5	1NO	-	B07-30-10 **	GJL1311001R□10□ ■	1,380
20A	12	7.5	5.5	-	1NC	B07-30-01 **	GJL1311001R□01□ ■	

Complete the contactor type code by replacing ** with desired coil voltage

3 pole - DC operated

Type code reference	Ordering code	L.P.(₹)
BC6-30-10 **	GJL1213001R□10□ ■	1,740
BC6-30-01 **	GJL1213001R□01□ ■	
BC7-30-10 **	GJL1313001R□10□ ■	1,890
BC7-30-01 **	GJL1313001R□01□ ■	

Mini reversing contactors with screw connection:

3 pole - AC operated

AC1 duty Amps	AC3 rating at 415V			Auxiliary contacts		Type code reference	Ordering code	L.P.(₹)
Amps	Amps	hP	kW					
16A	9	5.5	4	1NO	-	VB06-30-10 **	GJL1211901R□10□ □	3,700
16A	9	5.5	4	-	1NC	VB06-30-01 **	GJL1211901R□01□ □	3,700
20A	12	7.5	5.5	1NO	-	VB07-30-10 **	GJL1311901R□10□ □	3,900
20A	12	7.5	5.5	-	1NC	VB07-30-01 **	GJL1311901R□01□ □	3,900

Complete the contactor type code by replacing ** with desired coil voltage

3 pole - DC operated

Type code reference	Ordering code	L.P.(₹)
VBC6-30-10 **	GJL1213901R□10□ □	3,860
VBC6-30-01 **	GJL1213901R□01□ ■	3,860
VBC7-30-10 **	GJL1313901R□10□ □	4,130
VBC7-30-01 **	GJL1313901R□01□ □	4,130

Mini contactors are also available in 4 pole (4NO / 2NO + 2NC)

Mini auxiliary contactor 4 pole with screw connection

Control circuit	Contact configuration		Type code reference	Ordering code	L.P.(₹)
	NO	NC			
AC	2NO	2NC	K6-22Z**	GJH1211001R□22□ □	1,390
	3NO	1NC	K6-31Z **	GJH1211001R□31□ ■	
	4NO	-	K6-40E **	GJH1211001R□40□ □	
DC	2NO	2NC	KC6-22Z**	GJH1213001R□22□ ■	1,780
	3NO	1NC	KC6-31Z **	GJH1213001R□31□ □	
	4NO	-	KC6-40E **	GJH1213001R□40□ □	

Complete the contactor type code by replacing ** with desired coil voltage

Coil voltage for mini contactors

AC		DC	
50-60Hz	Code	DC V	Code
24	0 ... 1 ■	24	0 ... 1 ■
48	0 ... 3	110 ... 125	0 ... 4 ■
110 ... 127	8 ... 4 ■	220 ... 240	0 ... 5
220 ... 240	8 ... 0 ■		
380 ... 415	8 ... 5		

Auxiliary contact blocks for mini contactors Ordering details

For contactor types	Auxiliary contacts	Type	Ordering code	L.P.(₹)
Front mounted instantaneous auxiliary contact blocks				
B6-, B7-30-10, BC6-, BC7-30-10	1NO + 1NC	CAF6-11M	GJL1201330R0003	740
VB6, VB7, VBC6, VBC7, VB6A, VB7A	2NO	CAF6-20M	GJL1201330R0007	
VBC6A, VBC7A	2NC	CAF6-02M	GJL1201330R0011	
Side mounted instantaneous auxiliary contact block				
B6-, B7-30-10, BC6-, BC7-30-10	1NO + 1NC	CA6-11M	GJL1201317R0003	740

Spares for contactors

Spare coils for A range

For contactor types	Type code reference	Ordering code	L.P.(₹)
N, A9.....A16, UA16..RA	ZA16 **	1SBN151410R□□06	870
A26..A40;UA26..UA30 RA	ZA40 **	1SBN152410R□□06	1,080
A45..A75;UA50..UA75 RA	ZA75 **	1SBN153510R□□06	3,380
A95..A110; UA95..UA110 RA	ZA110 **	1SFN154310R□□06	4,430
A145...A185	ZA185 **	1SFN154710R□□06	7,240
A210...A300	ZA300 **	1SFN155110R□□06	8,010

Spare coils for AF range

For contactor types	Type code reference	Ordering code	L.P.(₹)
AF45...AF75	ZAF75	1SBN153570R□□06	9,240
AF95...AF110	ZAF110	1SFN153370R□□06	12,410
AF145...AF185	ZAF185	1SFN154770R□□06	14,520
AF210,AF260 &AF300	ZAF300	1SFN155170R□□06	26,400
AF400...AF460	ZAF460**	1SFN155770R□□06	31,010
AF580...AF750**	ZAF750**	1SFN156170R□□06	40,250

Coil voltages & codes

N range, A09.....A300, UA.....RA, AX09...AX205			AF45...AF300			AF400...AF750		
Voltage V-50 Hz	Voltage V-60 Hz	Code	Voltage V-50/60 Hz	Voltage V..dc	Code	Voltage V-50/60 Hz	Voltage V..dc	Code
24	24	81		20....60	72*		24....60	68
110	110....120	84	48....130	48....130	69	48....130	48....130	69
220....230	230....240	80	100....250	100....250	70	100....250	100....250	70
400....415	415....440	86				250....500	250....500	71

* For contactor AF95...AF300

Spare contact sets for 3 pole

Description	For contactor types	Type code reference	Ordering code	L.P.(₹)
Contact set for 3 -pole contactors consisting of 6 fixed contacts, 3 moving contacts, springs and the required screws.	A/AF/AE/TAE50	ZL 50	1SBN163503R1000 ■	4,660
	A/AF/AE/TAE63	ZL 63	1SBN163703R1000 ■	6,760
	A/AF/AE/TAE75	ZL 75	1SBN164103R1000 ■	8,580
	A/AF/AE/TAE95	ZL 95	1SFN164303R1000 ■	11,160
	A/AF/AE/TAE110	ZL 110	1SFN164503R1000 ■	12,220
	A/AF145	ZL 145	1SFN164703R1000 ■	15,450
	A/AF185	ZL 185	1SFN164903R1000 ■	19,460
	A/AF210	ZL 210	1SFN165103R1000 ■	25,070
	A/AF260	ZL 260	1SFN165303R1000 ■	30,340
	A/AF300	ZL 300	1SFN165503R1000 ■	36,290
	AF400	ZL 400	1SFN165703R1000 ■	40,880
	AF460	ZL 460	1SFN165903R1000 ■	50,430
	AF 580	ZL 580	1SFN166103R1000 ■	84,880
	AF 750	ZL 750	1SFN166303R1000 ■	1,06,570
	UA 50	ZLU 50	1SBN163502R1000	5,360
	UA 63	ZLU 63	1SBN163702R1000	7,470
	UA 75	ZLU 75	1SBN164102R1000	9,380

Spare contact sets for 3 pole for AX

For contactor types	Type code reference	Ordering code	L.P.(₹)
AX50	ZLX50	1SBN163506R1000	4,310
AX65	ZLX65	1SBN163706R1000	5,720
AX80	ZLX80	1SBN164106R1000	7,450
AX95	ZLX95	1SFN164306R1000	8,690
AX115	ZLX115	1SFN169806R1000	10,570
AX150	ZLX150	1SFN169906R1000	14,020
AX185	ZLX185	1SFN164906R1000	16,500
AX205	ZLX205	1SFN165006R1000	20,070

Spare coils for AX range

For contactor types	Type code reference	Ordering code	L.P.(₹)
AX25	ZAX25	1SBN158910R□□36	800
AX40	ZAX40	1SBN152810R□□36	1,060
AX80	ZAX80	1SBN153510R□□36	3,300
AX150	ZAX150	1SFN159910R□□36	5,020
AX205	ZAX205	1SFN155010R□□36	7,120

Complete the contactor type code by replacing□□ with desired coil voltage from above mentioned table

■ Stock items

DOL and star delta starters



Direct on line starter:

Rating at 415V 50Hz		Back - up Fuse rating (A)	Type code reference	Ordering code	L.P.(₹)
HP	kW				
0.25	0.18	4A	MA-0.25 **	1SYN140318R□□25	3,510
0.50	0.37	4A	MA-0.50 **	1SYN140318R□□05	3,510
0.75	0.52	6A	MA-0.75 **	1SYN140318R□□75	3,510
1.00	0.75	6A	MA-1.00 **	1SYN140318R□□10 ■	3,510
1.50	1.10	10A	MA-1.50 **	1SYN140318R□□15	3,510
2.00	1.50	10A	MA-2.00 **	1SYN140318R□□20 ■	3,510
3.00	2.20	16A	MA-3.00 **	1SYN140318R□□30 ■	3,510
5.00	3.70	25A	MA-5.00 **	1SYN140318R□□50 ■	3,510
7.50	5.50	32A	MA-7.50 **	1SYN16018R□□75 ■	3,510
10.00	7.50	32A	MA-10.00 **	1SYN180318R□□10 ■	3,790



Fully automatic Star Delta starter:

Rating at 415V 50Hz		Type code reference	Ordering code	L.P.(₹)
HP	kW			
12.5	12.5/9.3	SDA-12.5 **	1SYN184322R□□00 ■	13,340
15	15/11	SDA-15 **	1SYN242322R□□00 ■	14,510
20	20/15	SDA- 20 **	1SYN244322R□□00 ■	16,830
25	25/18.5	SDA-25 **	1SYN246322R□□00	17,540
30	30/22	SDA-30 **	1SYN282322R□□00	21,180
35	35/26	SDA-35 **	1SYN284322R□□00	23,500
40	40/30	SDA-40 **	1SYN322322R□□00	28,520
50	50/37	SDA-50 **	1SYN352342R□□00	34,240
60	60/45	SDA-60 **	1SYN372342R□□00	44,040
75	75/55	SDA-75 **	1SYN412342R□□00	51,630

Complete the starter type code by replacing the ** with the desired coil voltage.

Voltage	Code
□ □ □	□ □
220 ... 230 V coil	3 8
400 ... 415 V coil	8 6 ■

DOL Starter with IP65 enclosure



4KE 7.5KW 415V, IP65 compact plastic enclosure with double insulation



Description	Ordering code	L.P.(₹)
DRAS09-29P 4.0 kW 415V, 415V coil	1SBK104035R2900	6,760
DRAS12-29P 5.5 kW 415V, 415V coil	1SBK114035R2900	7,270
DRAS16-29P 7.5 kW 415V, 415V coil	1SBK124035R2900	9,770

Note: T16 OLR to be ordered separately. Plz refer page no. 120 for reference.

Manual motor starter

With thermal and electromagnetic protection



MS116 Manual motor starters with short circuit, overload and phase loss protection

Rated power 415V KW	Ie current setting range Amp	S/C Icu breaking capacity kA	Type	Ordering code	L.P. (₹)
0.03	0.10 ... 0.16	50	MS116-0.16	1SAM250000R1001 ■	3,340
0.06	0.16 ... 0.25	50	MS116-0.25	1SAM250000R1002 ■	3,340
0.09	0.25 ... 0.40	50	MS116-0.4	1SAM250000R1003 ■	3,340
0.12	0.40 ... 0.63	50	MS116-0.63	1SAM250000R1004 ■	3,800
0.25	0.63 ... 1.00	50	MS116-1.0	1SAM250000R1005 ■	3,800
0.55	1.00 ... 1.60	50	MS116-1.6	1SAM250000R1006 ■	3,810
0.75	1.60 ... 2.50	50	MS116-2.5	1SAM250000R1007 ■	3,810
1.5	2.50 ... 4.00	50	MS116-4.0	1SAM250000R1008 ■	3,890
2.2	4.00 ... 6.30	50	MS116-6.3	1SAM250000R1009 ■	3,890
4.0	6.30 ... 10.0	50	MS116-10	1SAM250000R1010 ■	4,000
5.5	8.00 ... 12.0	25	MS116-12	1SAM250000R1012 ■	4,550
7.5	10.0 ... 16.0	16	MS116-16	1SAM250000R1011 ■	5,050
9.0	16.0 ... 20.0	15	MS116-20	1SAM250000R1013 ■	5,480
12.5	20.0 ... 25.0	15	MS116-25	1SAM250000R1014 ■	5,650
15.5	25.0 ... 32.0	10	MS116-32	1SAM250000R1015 ■	9,860



MS132 Manual motor starters with short circuit, overload and phase loss protection

Rated power 415V KW	Ie current setting range Amp	S/C Icu breaking capacity kA	Type	Ordering code	L.P. (₹)
0.03	0.10 ... 0.16	100	MS132-0.16	1SAM350000R1001	4,370
0.06	0.16 ... 0.25	100	MS132-0.25	1SAM350000R1002 ■	4,370
0.09	0.25 ... 0.40	100	MS132-0.4	1SAM350000R1003 ■	4,370
0.12	0.40 ... 0.63	100	MS132-0.63	1SAM350000R1004 ■	4,730
0.25	0.63 ... 1.00	100	MS132-1.0	1SAM350000R1005 ■	4,770
0.55	1.00 ... 1.60	100	MS132-1.6	1SAM350000R1006 ■	4,990
0.75	1.60 ... 2.50	100	MS132-2.5	1SAM350000R1007 ■	4,990
1.5	2.50 ... 4.00	100	MS132-4.0	1SAM350000R1008 ■	5,010
2.2	4.00 ... 6.30	100	MS132-6.3	1SAM350000R1009 ■	5,120
4.0	6.30 ... 10.0	100	MS132-10	1SAM350000R1010 ■	5,450
5.5	8.00 ... 12.0	100	MS132-12	1SAM350000R1012 ■	5,980
7.5	10.0 ... 16.0	100	MS132-16	1SAM350000R1011 ■	6,620
9.0	16.0 ... 20.0	100	MS132-20	1SAM350000R1013 ■	7,110
12.5	20.0 ... 25.0	50	MS132-25	1SAM350000R1014 ■	7,250
15.5	25.0 ... 32.0	50	MS132-32	1SAM350000R1015 ■	11,540



MS165 manual motor starters with short circuit, overload and phase loss protection

Ie current setting range Amp	S/C Icu breaking capacity kA	Type	Ordering code	L.P. (₹)
10 ... 16	100	MS165-16	1SAM451000R1011	12,400
14 ... 20	100	MS165-20	1SAM451000R1012	12,970
18 ... 25	100	MS165-25	1SAM451000R1013	13,290
23 ... 32	100	MS165-32	1SAM451000R1014 ■	14,250
30 ... 42	50	MS165-42	1SAM451000R1015 ■	14,520
40 ... 54	50	MS165-54	1SAM451000R1016 ■	17,640
52 ... 65	50	MS165-65	1SAM451000R1017 ■	18,770
62 ... 73	-	MS165-73	1SAM451000R1018	20,280
70 ... 80	-	MS165-80	1SAM451000R1019	22,260

■ Stock items

Manual motor starter

With thermal and electromagnetic protection

MO132 Manual motor starters with short circuit protection only



0.03	0.16	100	MO132-0.16	1SAM360000R1001	4,230
0.06	0.25	100	MO132-0.25	1SAM360000R1002	4,230
0.09	0.40	100	MO132-0.4	1SAM360000R1003	4,230
0.12	0.63	100	MO132-0.63	1SAM360000R1004	4,520
0.25	1.0	100	MO132-1.0	1SAM360000R1005 ■	4,590
0.55	1.6	100	MO132-1.6	1SAM360000R1006 ■	4,590
0.75	2.5	100	MO132-2.5	1SAM360000R1007 ■	4,590
1.5	4.0	100	MO132-4.0	1SAM360000R1008 ■	4,640
2.2	6.3	100	MO132-6.3	1SAM360000R1009 ■	4,630
4.0	10	100	MO132-10	1SAM360000R1010 ■	4,800
5.5	12	100	MO132-12	1SAM360000R1012 ■	4,800
7.5	16	100	MO132-16	1SAM360000R1011 ■	4,800
9.0	20	100	MO132-20	1SAM360000R1013 ■	5,160
12.5	25	50	MO132-25	1SAM360000R1014 ■	5,340
15.5	32	50	MO132-32	1SAM360000R1015 ■	11,000

MO132, MO165, MO495 and MO497 Manual motor starters

MO165 manual motor starters with short circuit protection only

Rated operational current Amp	S/C Icu breaking capacity kA	Type	Ordering code	L.P. (₹)
16	100	MO165-16	1SAM461000R1011	11,920
20	100	MO165-20	1SAM461000R1012	12,520
32	100	MO165-32	1SAM461000R1014 ■	12,770
42	50	MO165-42	1SAM461000R1015	13,670
54	50	MO165-54	1SAM461000R1016 ■	14,240
65	50	MO165-65	1SAM461000R1017	14,790
73	30	MO165-73	1SAM461000R1018	17,900
80	30	MO165-80	1SAM461000R1019	19,630

MS132-T circuit breakers for transformer protection



Description

MS132-T Circuit breakers for transformer protection are electro-mechanical protection devices specially designed to protect control transformers on the primary side.

The short-circuit current setting is fixed to 20 times the operating current to handle the high inrush current generated by transformers.

Ie current setting range Amp	S/C Icu breaking capacity kA	Type	Ordering code	L.P. (₹)
0.10 ... 0.16	100	MS132-0.16T	1SAM340000R1001	5,120
0.16 ... 0.25	100	MS132-0.25T	1SAM340000R1002	5,120
0.25 ... 0.40	100	MS132-0.4T	1SAM340000R1003	5,120
0.40 ... 0.63	100	MS132-0.63T	1SAM340000R1004	5,570
0.63 ... 1.00	100	MS132-1.0T	1SAM340000R1005	5,610
1.00 ... 1.60	100	MS132-1.6T	1SAM340000R1006	5,870
1.60 ... 2.50	100	MS132-2.5T	1SAM340000R1007	5,870
2.50 ... 4.00	100	MS132-4.0T	1SAM340000R1008 ■	5,900
4.00 ... 6.30	100	MS132-6.3T	1SAM340000R1009 ■	5,980
6.30 ... 10.0	100	MS132-10T	1SAM340000R1010 ■	6,390
8.00 ... 12.0	100	MS132-12T	1SAM340000R1012	7,060
10.0 ... 16.0	100	MS132-16T	1SAM340000R1011 ■	7,060
16.0 ... 20.0	100	MS132-20T	1SAM340000R1013	8,520
20.0 ... 25.0	50	MS132-25T	1SAM340000R1014	8,540

■ Stock items

Manual motor starter

MS116, MS132, MO132, MS165, MO165, MS4xx, MO4xx


General accessories

Description

With this solution of door coupling rotary mechanism it is possible to operate a Manual Motor Starter in the back of a switch cabinet from outside. The door coupling mechanism prevents opening of the door of a switch cabinet with the Manual Motor Starter in ON position. The complete mechanism includes handle, shaft, driver, shaft alignment ring and shaft supporter. All accessories fit for 6 mm shafts with a maximum length of 180 mm. The degree of protection for handles MSHD is IP64.

Ordering details

Frame	Description	Type	Ordering code	L.P.(₹)
MS116 MS132 MO132 MS165 MO165 MS4xx, MO4xx	SHAFT - Shaft diameter 6 mm. Shaft extension for door coupling driver	OX56X130	1SCA101655R1001	490
	MSHD - Handle	MSHD-LB1	1SAM201920R1001	1,380
		MSHD-LY2	1SAM201920R1002	1,380
		MSHD-LTB3	1SAM201920R1011	1,380
		MSHD-LTY3	1SAM201920R1012	1,380
	MSMN- Driver	MSMN4	1SAM101923R0002	200
		MSMNO5	1SAM101923R0012	200
	MSH-AR Shaft alignment ring	MSH-AR	1SAM201920R1000	230
MS116, MS132	MSAH1-Shaft supporter	MSAH1	1SAM201909R1021	920

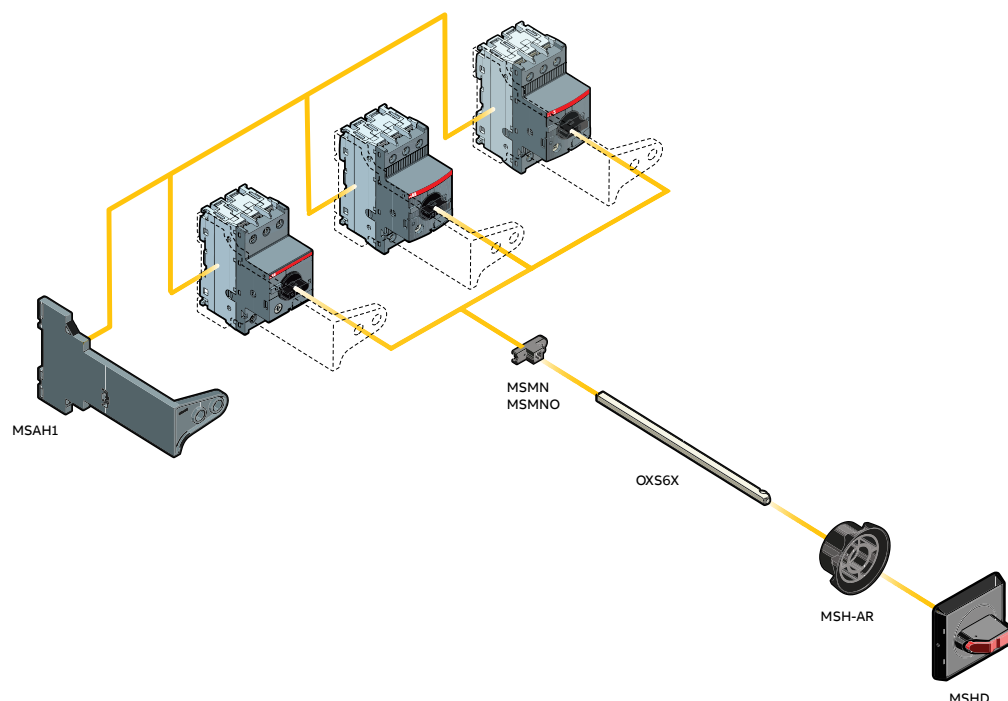

Manual motor starter

Accessories for MS116, MS132, MO132, MS132-T, MS165, MO165



AA1-24

Shunt trip				
Suitable for	Rated voltage	Type	Ordering code	L.P.(₹)
MS116, MS132, MO132, MS132-T MS165 MO165	20 ... 24	AA1-24	1SAM201910R1001	3,690
	110	AA1-110	1SAM201910R1002 ■	3,690
	200-240	AA1-230	1SAM201910R1003 ■	3,690
	350-415	AA1-400	1SAM201910R1004	3,690
	Undervoltage release			
	24	UA1-24	1SAM201904R1001	3,020
	110	UA1-110	1SAM201904R1004	3,020
	230	UA1-230	1SAM201904R1005	3,020
	415	UA1-415	1SAM201904R1007	3,020



HKF1-11

Auxiliary contacts – mountable on the front				
Suitable for	Aux contacts	Type	Ordering code	L.P.(₹)
MS116, MS132, MO132, MS132-T MS165 MO165	1NO+1NC	HKF1-11	1SAM201901R1001 ■	750
	2 NO	HKF1-20	1SAM201901R1002 ■	750
	2NC	-	-	-
	1NO	HKF1-10	1SAM201901R1003 ■	470
	1NC	HKF1-01	1SAM201901R1004 ■	470
Auxiliary contacts – mountable on the right				
		HK1-11	1SAM201902R1001 ■	1,020
		HK1-20	1SAM201902R1002 ■	1,020
		HK1-02	1SAM201902R1003 ■	1,020



SK1-11

CK1-11

Suitable for	Aux contacts	Type	Ordering code	L.P.(₹)
MS116, MS132, MO132, MS 165 MO 165 MS132-T MS132 MS132-T MS165	1NO+1NC	SK1-11**	1SAM201903R1001 ■	1,350
	2 NO	SK1-20**	1SAM201903R1002 ■	1,350
	2 NC	SK1-02**	1SAM201903R1003	1,350
	1NO+1NC	CK1-11#	1SAM301901R1001 ■	1,890
	2 NO	CK1-20#	1SAM301901R1002 ■	1,890
MS165	2 NC	CK1-02#	1SAM301901R1003	1,890

**for tripped alarm, max 2 piece

#for short-circuit alarm, max. 2 pieces

Manual motor starter

Manual motor starters with short Circuit, overload and phase loss protection



MS495/MS497 Manual motor starters with short circuit, overload and phase loss protection

Rated power 415V KW	Ie current setting range Amp	S/C Icu breaking capacity kA	Type	Ordering code	L.P. (₹)
37	57.0 ... 75.0	50	MS495-75	1SAM550000R1008	Upon request
45	70.0 ... 90.0	50	MS495-90	1SAM550000R1009	
55	80.0 100.0	50	MS495-100	1SAM550000R1010	
37	57.0 ... 75.0	100	MS497-75	1SAM580000R1008	
45	70.0 ... 90.0	100	MS497-90	1SAM580000R1009	
55	80.0 ... 100.	100	MS497-100	1SAM580000R1010	

Accessories for MS4xx



HK4-11

Auxiliary contacts – mountable on the front

Suitable for	Aux contacts	Type	Ordering code	L.P. (₹)
MS49x, MO49x	1NO+1NC	HK4-11	1SAM401901R1001 ■	1,170

Auxiliary contacts – mountable on the right

Rated voltage	Type	Ordering code	L.P. (₹)
1NO+1NC	HKS4-11	1SAM401902R1001 ■	1,170
2 NO	HKS4-20	1SAM401902R1002 ■	1,170
2 NC	HKS4-02	1SAM401902R1003	1,170

Shunt trip units – mountable on the right

Suitable for	Rated voltage	Type	Ordering code	L.P. (₹)
MS49x, MO49x	20 ... 24	AA4-24	1SAM401907R1001	3,710
	110	AA4-110	1SAM401907R1002	4,100
	200-240	AA4-230	1SAM401907R1003	4,100
	350-415	AA4-400	1SAM401907R1004	4,100

Undervoltage release mountable on the right

Rated voltage	Type	Ordering code	L.P. (₹)
24	UA4-24	1SAM401905R1004	4,100
110	UA4-110	1SAM401905R1001	4,100
230	UA4-230	1SAM401905R1002	4,100
415	UA4-415	1SAM401905R1002	4,100

Signaling contacts – mountable on the right*

Suitable for	Aux contacts	Type	Ordering code	L.P. (₹)
MS49x, MO49x	1NO+1NC	SK4-11	1SAM401904R1001 ■	2,110



AA4-24



SK4-11

*for tripped alarm, max 2 piece

■ Stock items

Thermal overload relays



TA25, TA42 and TA75 relays

Relay range in Amps	Direct mounting on contactors	Type code reference	Ordering code	L.P.(₹)
0.1 ... 0.16	A9...A40 AX9...AX40 AL9...AL40 TAL9...TAL40	TA25DU 0.16M	1SAZ211201R2005 ■	1,630
0.16 ... 0.25		TA25DU 0.25M	1SAZ211201R2009 ■	1,630
0.25 ... 0.4		TA25DU 0.4M	1SAZ211201R2013 ■	1,630
0.4 ... 0.63		TA25DU 0.63M	1SAZ211201R2017 ■	1,630
0.63 ... 1.0		TA25DU 1.0M	1SAZ211201R2021 ■	1,630
1.0 ... 1.4		TA25DU 1.4M	1SAZ211201R2023 ■	1,630
1.3 ... 1.8		TA25DU 1.8M	1SAZ211201R2025 ■	1,630
1.7 ... 2.4		TA25DU 2.4M	1SAZ211201R2028 ■	1,630
2.2 ... 3.1		TA25DU 3.1M	1SAZ211201R2031 ■	1,630
2.8 ... 4.0		TA25DU 4.0M	1SAZ211201R2033 ■	1,630
3.5 ... 5.0		TA25DU 5.0M	1SAZ211201R2035 ■	1,630
4.5 ... 6.5		TA25DU 6.5M	1SAZ211201R2038 ■	1,630
6.0 ... 8.5		TA25DU 8.5M	1SAZ211201R2040 ■	1,630
7.5 ... 11.0		TA25DU 11M	1SAZ211201R2043 ■	1,630
10.0 ... 14.0		TA25DU 14M	1SAZ211201R2045 ■	1,630
13.0 ... 19.0		TA25DU 19M	1SAZ211201R2047 ■	2,020
18.0 ... 25.0		TA25DU 25M	1SAZ211201R2051 ■	2,020
24.0 ... 32.0		TA25DU 32M	1SAZ211201R2053 ■	2,020
TA42DU				
18.0 ... 25.0	A30,A40,	TA42DU 25	1SAZ311201R2001 ■	3,350
22.0 ... 32.0	AX32...AX40	TA42DU 32	1SAZ311201R2002 ■	3,640
29.0 ... 42.0	AL30,AL40, TAL30,TAL 40	TA42DU 42	1SAZ311201R2003 ■	3,640
TA75DU				
22 ... 32	A50...A75 AX50...AX80	TA75DU 32	1SAZ321201R2002 ■	4,210
29 ... 42		TA75DU 42	1SAZ321201R2003 ■	4,950
36 ... 52		TA75DU 52	1SAZ321201R2004 ■	4,950
45 ... 63		TA75DU 63	1SAZ321201R2005 ■	4,950
60 ... 80		TA75DU 80	1SAZ321201R2006 ■	5,300
TA80DU				
36 ... 52	A95...A110, AX95...AX150	TA80DU-52	1SAZ331201R1004 ■	6,090
45 ... 63		TA80DU-63	1SAZ331201R1005 ■	6,090
60 ... 80		TA80DU-80	1SAZ331201R1006 ■	6,550

TA25/TA42/TA75/TA80/TA110/TA200 are direct operated relays with trip class 10A

TA110DU

66 ... 90	A95...A110,	TA110DU-90	1SAZ411201R1001 ■	10,150
80 ... 110	AX95...AX150	TA110DU-110	1SAZ411201R1002 ■	11,010

TA200DU

66 ... 90	A145...A185 AX185...AX205 AF190, AF205	TA200DU-90	1SAZ421201R1001 ■	11,680
80 ... 110		TA200DU-110	1SAZ421201R1002 ■	12,650
100 ... 135		TA200DU-135	1SAZ421201R1003 ■	13,490
110 ... 150		TA200DU-150	1SAZ421201R1004 ■	14,690
130 ... 175		TA200DU-175	1SAZ421201R1005 ■	15,290
150 ... 200		TA200DU-200	1SAZ421201R1006 ■	15,980

Accessories

Independent Mounting Kit	TA25DU0.16..25A	DB25/25	1SAZ201108R0001 ■	420
	TA25DU32	DB25/32	1SAZ201108R0002	890
	TA42DU,TA75DU, TA80DU	DB80	1SAZ301110R0001 ■	3,880
	TA110DU, TA200DU	DB200	1SAZ401110R0001 ■	4,020

■ Stock items

Thermal overload relays



TF42

T16 Relays

Relay range in Amps	Direct mounting on contactors	Type code reference	Ordering code	L.P. (₹)
0.10 ... 0.13	B6/BC6 B7/BC7 VB6/VBC6 VB7/VBC7 AS/ASL DOL starter IP65	T16-0.13	1SAZ711201R1005	Upon request
0.13 ... 0.17		T16-0.17	1SAZ711201R1008	
0.17 ... 0.23		T16-0.23	1SAZ711201R1009	
0.23 ... 0.31		T16-0.31	1SAZ711201R1013	
0.31 ... 0.41		T16-0.41	1SAZ711201R1014	
0.41 ... 0.55		T16-0.55	1SAZ711201R1017	
0.55 ... 0.74		T16-0.74	1SAZ711201R1021	
0.74 ... 1.00		T16-1.0	1SAZ711201R1023	
1.00 ... 1.30		T16-1.3	1SAZ711201R1025	
1.30 ... 1.70		T16-1.7	1SAZ711201R1028	
1.70 ... 2.30		T16-2.3	1SAZ711201R1031	
2.30 ... 3.10		T16-3.1	1SAZ711201R1033	
3.10 ... 4.20		T16-4.2	1SAZ711201R1035	
4.20 ... 5.70		T16-5.7	1SAZ711201R1038 ■	
5.70 ... 7.60		T16-7.6	1SAZ711201R1040	
7.60 ... 10.0		T16-10	1SAZ711201R1043	
10.0 ... 13.0		T16-13	1SAZ711201R1045	
13.0 ... 16.0		T16-16	1SAZ711201R1047	

TF42 Relays

Relay range in Amps	Direct mounting on contactors	Type code reference	Ordering code	L.P. (₹)
0.10 ... 0.13	AF09...AF38	TF42-0.13	1SAZ721201R1005	Upon request
0.13 ... 0.17		TF42-0.17	1SAZ721201R1008	
0.17 ... 0.23		TF42-0.23	1SAZ721201R1009	
0.23 ... 0.31		TF42-0.31	1SAZ721201R1013	
0.31 ... 0.41		TF42-0.41	1SAZ721201R1014	
0.41 ... 0.55		TF42-0.55	1SAZ721201R1017	
0.55 ... 0.74		TF42-0.74	1SAZ721201R1021	
0.74 ... 1.00		TF42-1.0	1SAZ721201R1023	
1.00 ... 1.30		TF42-1.3	1SAZ721201R1025	
1.30 ... 1.70		TF42-1.7	1SAZ721201R1028 ■	
1.70 ... 2.30		TF42-2.3	1SAZ721201R1031 ■	
2.30 ... 3.10		TF42-3.1	1SAZ721201R1033 ■	
3.10 ... 4.20		TF42-4.2	1SAZ721201R1035 ■	
4.20 ... 5.70		TF42-5.7	1SAZ721201R1038 ■	
5.70 ... 7.60		TF42-7.6	1SAZ721201R1040 ■	
7.60 ... 10.0		TF42-10	1SAZ721201R1043	
10.0 ... 13.0		TF42-13	1SAZ721201R1045 ■	
13.0 ... 16.0		TF42-16	1SAZ721201R1047 ■	
16.0 ... 20.0		TF42-20	1SAZ721201R1049	
20.0 ... 24.0		TF42-24	1SAZ721201R1051	
24.0 ... 29.0		TF42-29	1SAZ721201R1052	
29.0 ... 35.0		TF42-35	1SAZ721201R1053	
35.0 ... 38.0/40.0		TF42-38	1SAZ721201R1055	

■ Stock items

Thermal overload relays



TF42

TF65/TF96/TF140 Relay

Relay range in Amps	Direct mounting on contactors	Type code reference	Ordering code	L.P. (₹)
22.0...28.0	AF40, AF52, AF65	TF65-28	1SAZ811201R1001	Upon request
25.0...33.0		TF65-33	1SAZ811201R1002	
30.0...40.0		TF65-40	1SAZ811201R1003	
36.0...47.0		TF65-47	1SAZ811201R1004	
44.0...53.0		TF65-53	1SAZ811201R1005	
50.0...60.0		TF65-60	1SAZ811201R1006	
57.0...67.0		TF65-67	1SAZ811201R1007	
40.0...51.0	AF80, AF96	TF96-51	1SAZ911201R1001	
48.0...60.0		TF96-60	1SAZ911201R1002	
57.0...68.0		TF96-68	1SAZ911201R1003	
65.0...78.0		TF96-78	1SAZ911201R1004	
75.0...87.0		TF96-87	1SAZ911201R1005	
84.0...96.0		TF96-96	1SAZ911201R1006	
66...90	AF116, AF140	TF140DU-90	1SAZ431201R1001	
80...110		TF140DU-110	1SAZ431201R1002	
100...135		TF140DU-135	1SAZ431201R1003	
110...142		TF140DU-142	1SAZ431201R1004	

For AF190 and AF205 use TA200DU OLR

Description	Type	Ordering code	L.P. (₹)
Separate mounting kit	DB16E	1SAX101110R0001 ■	Upon request
Separate mounting kit	DB42	1SAZ701902R0001 ■	
Separate mounting kit for TF65	DB65	1SAZ801901R1001	
Separate mounting kit for TF96	DB96	1SAZ901901R1001	

Electronic overload relays and suitable contactors

Suitable for Contactor	A9 ... A16 TAL9...TAL16	A26 ... A40	A50 ... A75	A95, A110	AF190, AF205			
	AL9 ... AL16	AL30 ... AL40						
EOLR	E16DU	E45DU	E80DU	E140DU	EF205			
Suitable for Contactor	AF400,	AF580,	AF1350,	B6/BC6				
	AF460	AF750	AF1650	B7/BC7				
EOLR	EF460	EF750	E1250DU	E16DU, T16				
Suitable for Contactor	AF09 ... AF16	AF26, AF38	AF40, AF52, AF65	AF80, AF96	AF116, AF140, AF146	AF265, AF305, AF370	AF400, AF460,	AF580, AF750, AF1250
	EF19	EF45	EF65	EF96	EF146	EF370	EF460	EF750

■ Stock items

Electronic overload relays class 10, 20, 30



Electronic overload relays

Trip class 10, 20, 30 selectable

Setting range	Trip class	Type	Ordering code	L.P.(₹)
0.1... 0.32A	Selecatable 10E, 20E and 30E	E16DU 0.32	1SAX111001R1101	8,880
0.3 ... 1.0A		E16DU 1.0	1SAX111001R1102	8,880
0.8 ... 2.7A		E16DU 2.7	1SAX111001R1103 ■	8,880
1.9 ... 6.3A		E16DU 6.3	1SAX111001R1104 ■	9,810
5.7... 18.9A		E16DU 18.9	1SAX111001R1105 ■	9,810
9 ... 30A		E45DU 30	1SAX211001R1101 ■	12,640
15 ... 45A		E45DU 45	1SAX211001R1102 ■	13,760
27 ... 80A		E80DU 80	1SAX311001R1101 ■	18,070
50 ... 140A		E140DU 140	1SAX321001R1101 ■	21,760
63 ... 210A		EF205-210	1SAX531001R1101	Upon request
115 ... 380A		EF370-380	1SAX611001R1101	Upon request
150 ... 500A		EF460	1SAX721001R1101 ■	Upon request
250 ... 800A		EF750	1SAX821001R1101	Upon request
375 ... 1250A		E1250DU 375 - 1250 A	1SFA739001R1000	Upon request
0.10...0.32A	Selecatable 10E, 20E and 30E	EF19-0.32	1SAX121001R1101	Upon request
0.30...1.00A		EF19-1.0	1SAX121001R1102	
0.80...2.70A		EF19-2.7	1SAX121001R1103 ■	
1.90...6.30A		EF19-6.3	1SAX121001R1104 ■	
5.70...18.9A		EF19-18.9	1SAX121001R1105 ■	
9.00...30.0A		EF45-30	1SAX221001R1101 ■	
15.0...45.0A		EF45-45	1SAX221001R1102 ■	
25...70A		EF65-70	1SAX331001R1101 ■	
36...100A		EF96-100	1SAX341001R1101 ■	
54...150A		EF146-150	1SAX351001R1101 ■	
63 ... 210A		EF205-210	1SAX531001R1101 ■	
115 ... 380A		EF370-380	1SAX611001R1101 ■	
150 ... 500A		EF460	1SAX721001R1101	
250 ... 800A		EF750	1SAX821001R1101	

Accessories

Description	Type	Ordering code	L.P.(₹)
Separate mounting kit	DB16E	1SAX101110R0001	2,840
Separate mounting kit - EF19	DB19EF	1SAX101910R1001 ■	2,870
Separate mounting kit - EF45	DB45EF	1SAX201910R0001 ■	4,590
Separate mounting kit	DB45E	1SAX201110R1001	4,590
Separate mounting kit	DB80E	1SAX301110R1001 ■	5,720
Separate mounting kit	DB140E	1SAX301110R1002	8,270


For suitable contactors refer page no. 101

■ Stock items

Just push it

Push-in Spring motor starting solution

- Faster than ever installation
- Easier than ever wiring
- Reliable as ever connections

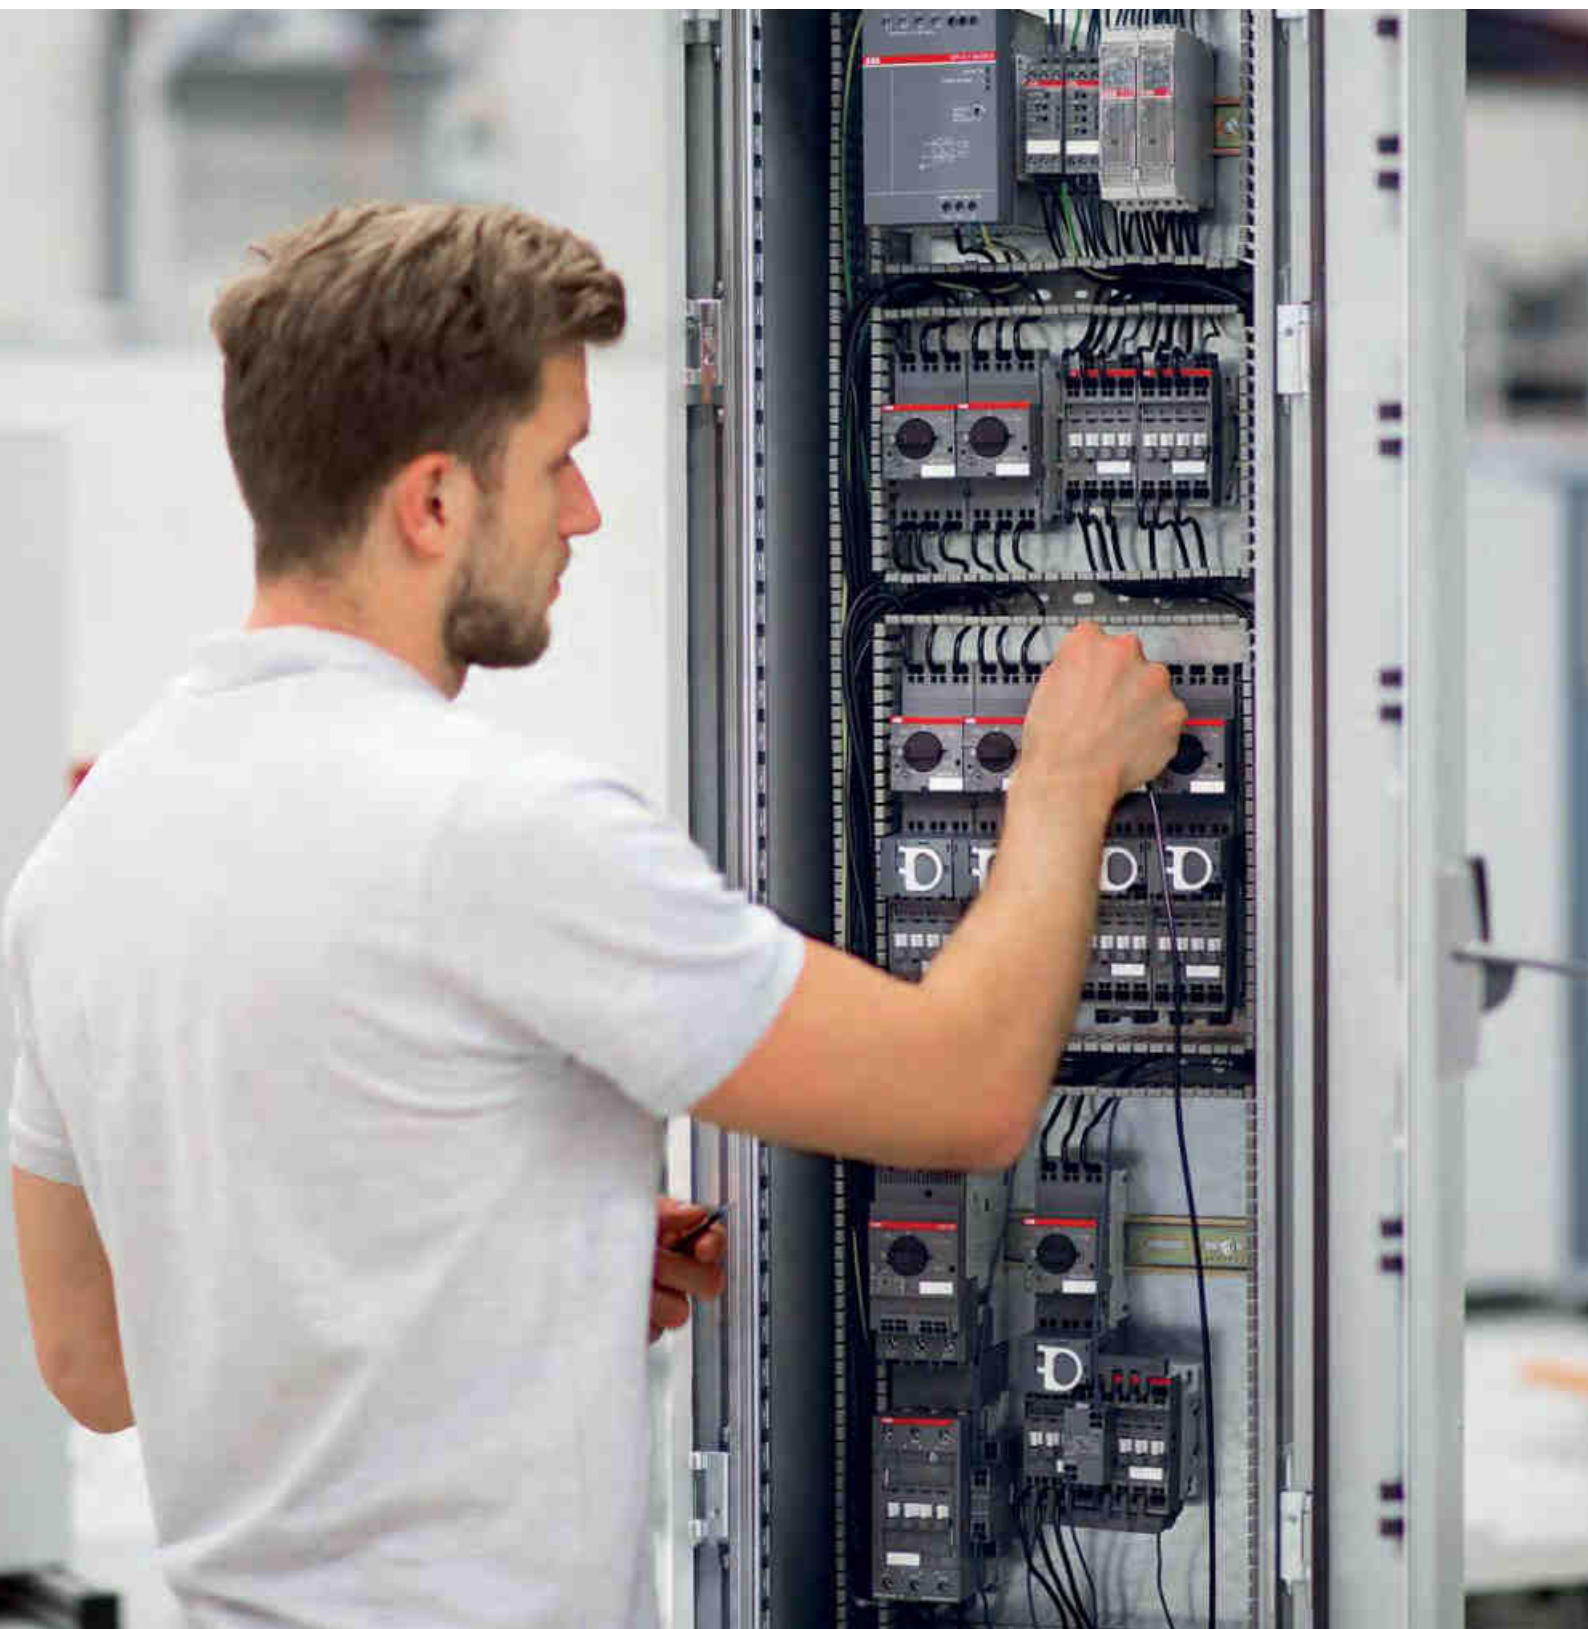

Push-in Spring motor starting solution

Complete range, complete efficiency

With the new Push-in Spring motor starting solution, one push is all you need for extremely fast wiring. No tool is required, so you can save up to 50% wiring time with Push-in Spring compared to conventional spring solutions. And the connections are just as reliable. So for speed, ease and reliability, just push it.



2-in-1

Benefit from both Push-in mode and Spring mode and use ferruled cables or cables without ferrules in the same terminal.




Compatible with screw range

Mount accessories for control circuits on the screw range up to 30 kW AC-3 400 V on manual motor starters and up to 45 kW AC-3 400 V, 130 A AC-1 on contactors.



Robust by design

Contact robustness by design, independent from operator.

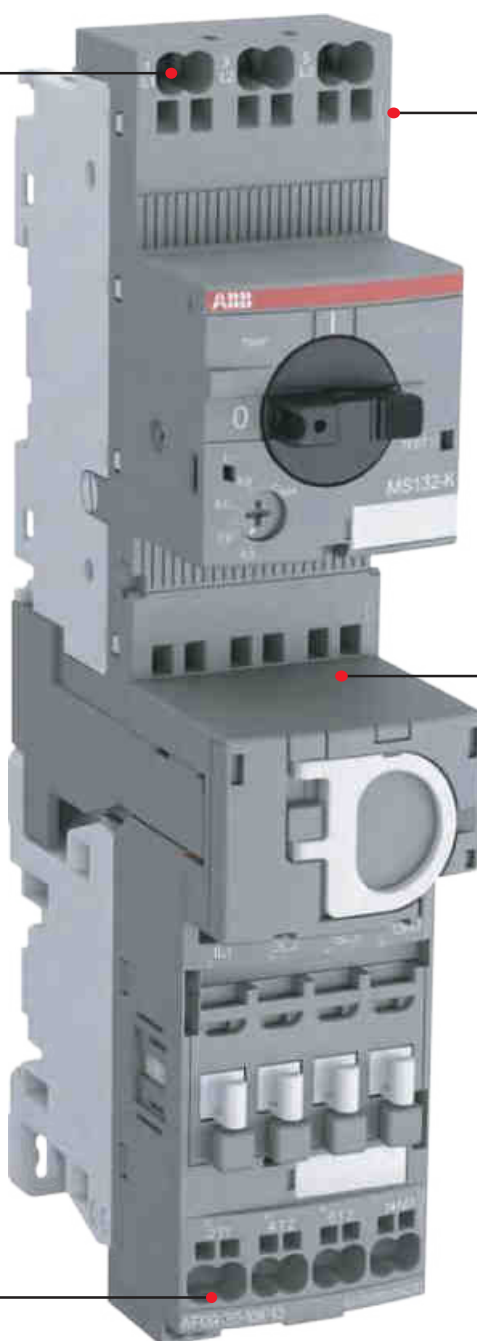


Just one tool for everything

You only need a 3 mm screwdriver in Spring mode as well as for de-wiring the complete solution.



Tool-less connecting links

100% tool-less mounting and dismantling connecting links.



Higher connecting capacity

The solution ranges up to 18.5 kW 400 V AC-3 and 50 A AC-1 (25 hp 480 V and 45 A 600 V general use).

Note: Contact our nearest sales office for more information

Softstarters NEW

ABB softstarters - The complete range



PSR - The compact range

PSR is our most compact softstarter with basic benefits and values. PSR can handle up to 100 starts per hour. Suitable for small motors.

PSE - The efficient range


The new generation PSE is a true general purpose softstarter. It's a perfect balance between high starting capacity and cost efficiency. Now featuring built-in fieldbus communication.

PSTX - The advanced range

PSTX is our most advanced softstarter with full control and motor protection built-in. PSTX is the most complete alternative for any motor starting application. Featuring built-in modbus and anybus modules that support all major communication protocols.

PSR	PSE	PSTX	* Standard, O Optional, - Not available
*	*	*	Built-in by-pass 1) on PSTB
-	-	*	Inside delta connection
-	*	*	Coated PCBs
-	*	*	Display and keypad,
-	*	*	Torque control / Pump control
-	*	*	Settable current limit function
-	*	*	Electronic motor overload protection
-	-	*	PTC input for motor protection
-	-	*	Phase imbalance protection
-	-	*	Phase reversal protection
-	*	*	Locked rotor protection
-	*	*	Thyristor overtemperature protection
-	*	*	Underload protection
-	-	*	UV/OV protection
-	-	*	Programmable warning functions
-	*	*	Analog output
O	* 1)	* 1)	FieldBus communication, 1) built in Modbus-RTU
-	O	*	Event log
-	O	* 1)	External keypad 1) detachable key pad
-	-	*	Motor heating
-	-	*	Pump cleaning
-	-	*	Limp mode
-	-	*	Network diagnostics

PSR18 - 600 -70

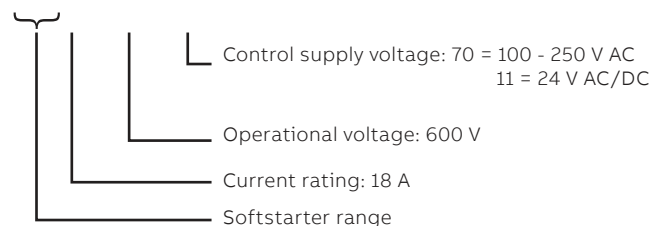

Softstarters selection **NEW**

ABB softstarters offering consists of three ranges, covering every need. The products help you secure motor reliability, improve installation efficiency and increase application productivity.



PSR – The compact range	PSE – The efficient range	PSTX – The advanced range
<ul style="list-style-type: none"> When soft start and stop benefits and values are requested When operating a small motor When up to 100 starts per hour are requested 	<ul style="list-style-type: none"> When there is limited space When common softstarter functions and protections are needed When communication is needed 	<ul style="list-style-type: none"> When full control and motor protection is needed When an advanced softstarter with an extensive functionality is needed When motor is connected inside delta or in 690 V

Step	Process
1	Determine softstarter series First, determine the softstarter series that fulfill the needs of the application and motor. Use the guide on the left to explore the three series and the power range each one covers.
2	Match the softstarter size with the motor current When the softstarter series is selected, the correct size should now be determined. The selection of a softstarter is based on the current. Find the softstarter that corresponds to the motor current.
3	Fine tune and select the correct size The last step is to fine tune the selection, and there are three different factors to consider: <ul style="list-style-type: none"> a. Normal or a heavy load: If the load is characterized as a heavy load, select the next size softstarter in the series. b. High ambient temperature c. High altitude Use the equations and the table on the right to find the correct de-rating equation.

Note: If the application is more complicated and there are specific requirements on acceleration time, maximum starting current or many starts per hour, the software proSoft should be used for a fine tuned selection.

Altitude formula	
De-rate for altitudes between 1000-4000 m or 3280-13123 ft with the following equations for all softstarters:	
In meters: % of I _e = 100 – (x-1000)/150	
In feet: % of FLA = 100 – (y-3280)/480	
Where x/y is the actual altitude in m/ft	
Temperature equations	
PSTX and PSR In Celsius:	40...60 oC: Reduce I _e with 0.8%/°C
PSTX and PSR In Fahrenheit:	104...140 oF: Reduce FLA with 0.44%/°F
PSE In Celsius:	40...60 oC: Reduce I _e with 0.6%/°C
PSE In Fahrenheit:	104...140 oF: Reduce FLA with 0.33%/°F
Typical applications	
Normal duty start	Heavy duty
Bow thrusters	Centrifugal fan
Centrifugal pump	Conveyor belt (long)
Compressors	Crusher
Conveyor belt (short)	Stirrer
Elevator	Sawmill

Softstarters

NEW

ABB softstarters - The complete range



PSR - The compact range

- Rated operational current: 3...105 A
- Operational voltage: 208...600 V AC
- Wide rated control supply voltage: 100...240 V AC, 50/60 Hz or 24 V AC/DC
- Two-phase controlled
- Soft start and soft stop with voltage ramp
- Built-in bypass for energy saving and easy installation
- Fieldbus communication with fieldbus plug adapter and the fieldbus plug

PSR3 ... PSR105

Rated operational voltage U_e , 208-600 V AC

Rated control supply voltage, U_s , 100 - 240 V AC



415V Pe kW	IEC Max rated operational I_e A	Type	Order code	L.P. (₹)
1.5	3.9	PSR3-600-70	1SFA896103R7000	13,150
3	6.8	PSR6-600-70	1SFA896104R7000	13,930
4	9	PSR9-600-70	1SFA896105R7000	15,850
5.5	12	PSR12-600-70	1SFA896106R7000	18,820
7.5	16	PSR16-600-70	1SFA896107R7000	23,620
11	25	PSR25-600-70	1SFA896108R7000	26,080
15	30	PSR30-600-70	1SFA896109R7000	35,740
18.5	37	PSR37-600-70	1SFA896110R7000	42,370
22	45	PSR45-600-70	1SFA896111R7000	46,050
30	60	PSR60-600-70	1SFA896112R7000	61,650
37	72	PSR72-600-70	1SFA896113R7000	75,850
45	85	PSR85-600-70	1SFA896114R7000	85,630
55	105	PSR105-600-70	1SFA896115R7000	93,300

For rated control supply voltage, U_s , 24 V Dc replace R7000 by R1100



PSE - The efficient range

- Rated operational current: 18...370 A
- Operational voltage: 208...600 V AC
- Wide rated control supply voltage: 100...250 V AC, 50/60 Hz
- Voltage ramp and torque control for both start and stop
- Two-phase controlled, Current limit and Kick-start
- Built-in bypass for energy saving and easy installation
- External keypad rated IP66 (Type 1, 4X,12) as an option
- **NEW** Built-in modbus-RTU communication for monitoring and control
- Fieldbus communication with fieldbus plug adapter and the fieldbus plug
- Analog output for display of motor current
- Electronic overload, Underload and locked rotor protection

PSE18 ... PSE370

Normal starts, Class 10, In-Line

Rated operational voltage U_e , 208-600 V AC

Rated control supply voltage, U_s , 100 - 240 V AC

415V Pe kW	IEC Max rated operational I_e A	Type	Order code	L.P. (₹)
7.5	18	PSE18-600-70	1SFA897101R7000	54,400
11	25	PSE25-600-70	1SFA897102R7000	54,680
15	30	PSE30-600-70	1SFA897103R7000	57,550
18.5	37	PSE37-600-70	1SFA897104R7000	65,080
22	45	PSE45-600-70	1SFA897105R7000	70,990
30	60	PSE60-600-70	1SFA897106R7000	80,050
37	72	PSE72-600-70	1SFA897107R7000	91,500
45	85	PSE85-600-70	1SFA897108R7000	97,160
55	106	PSE105-600-70	1SFA897109R7000	1,10,100
75	143	PSE142-600-70	1SFA897110R7000	1,44,550
90	171	PSE170-600-70	1SFA897111R7000	1,56,370
110	210	PSE210-600-70-1	1SFA897112R7001	1,86,300
132	250	PSE250-600-70-1	1SFA897113R7001	2,01,200
160	300	PSE300-600-70-1	1SFA897114R7001	2,24,650
200	370	PSE370-600-70-1	1SFA897115R7001	2,47,500

For accessories consult

Softstarters

PSTX - The advanced range



- Rated operational current: 30 to 1250 A
- Three-phase controlled
- Operational voltage: 208 – 690 VAC
- Wide rated control supply voltage: 100 – 250 V, 50/60 Hz (inside-delta: 2160 A)
- Both in-line and inside-delta connection
- Coated circuit boards protecting from dust, moist and corrosive atmosphere
- Detachable keypad rated IP66 (4X outdoor)
- Built-in bypass for energy saving and easy installation
- Built-in Modbus RTU for monitoring and control
- Support for all major communication protocols
- Analog output for measurement of current, voltage, power factor etc.

PSTX30 ... PSTX370

Normal starts, class 10, in-line, ordering details

Rated operational voltage U_e, 208-600 V

Rated control supply voltage U_s, 100-250 V AC, 50/60 Hz



415V Pe kW	IEC Max rated operational I _e A	Type	Ordering code	L.P. (₹)
15	30	PSTX30-600-70	1SFA898103R7000	Upon request
18.5	37	PSTX37-600-70	1SFA898104R7000	
22	45	PSTX45-600-70	1SFA898105R7000	
30	60	PSTX60-600-70	1SFA898106R7000	
37	72	PSTX72-600-70	1SFA898107R7000	
45	85	PSTX85-600-70	1SFA898108R7000	
55	106	PSTX105-600-70	1SFA898109R7000	
75	143	PSTX142-600-70	1SFA898110R7000	
90	171	PSTX170-600-70	1SFA898111R7000	
110	210	PSTX210-600-70	1SFA898112R7000	
132	250	PSTX250-600-70	1SFA898113R7000	
160	300	PSTX300-600-70	1SFA898114R7000	
200	370	PSTX370-600-70	1SFA898115R7000	
250	470	PSTX470-600-70	1SFA898116R7000	
315	570	PSTX570-600-70	1SFA898117R7000	
400	720	PSTX720-600-70	1SFA898118R7000	
450	840	PSTX840-600-70	1SFA898119R7000	
560	1050	PSTX1050-600-70	1SFA898120R7000	
710	1200	PSTX1250-600-70	1SFA898121R7000	

Rated operational voltage U_e, 208-690 V

Rated control supply voltage U_s, 100-250 V AC, 50/60 Hz



690V Pe kW	IEC Max rated operational I _e A	Type	Ordering code	L.P. (₹)
25	30	PSTX30-690-70	1SFA898203R7000	Upon request
30	37	PSTX37-690-70	1SFA898204R7000	
37	44	PSTX45-690-70	1SFA898205R7000	
55	60	PSTX60-690-70	1SFA898206R7000	
59	72	PSTX72-690-70	1SFA898207R7000	
75	85	PSTX85-690-70	1SFA898208R7000	
90	106	PSTX105-690-70	1SFA898209R7000	
132	143	PSTX142-690-70	1SFA898210R7000	
160	171	PSTX170-690-70	1SFA898211R7000	
184	210	PSTX210-690-70	1SFA898212R7000	
220	250	PSTX250-690-70	1SFA898213R7000	
257	300	PSTX300-690-70	1SFA898214R7000	
355	370	PSTX370-690-70	1SFA898215R7000	
450	470	PSTX470-690-70	1SFA898216R7000	
560	570	PSTX570-690-70	1SFA898217R7000	
710	720	PSTX720-690-70	1SFA898218R7000	
800	840	PSTX840-690-70	1SFA898219R7000	
1000	1050	PSTX1050-690-70	1SFA898220R7000	
1200	1250	PSTX1250-690-70	1SFA898221R7000	



PSTX142 ... PSTX170

1SFC132053V0001

Softstarters

PSTX30 ... PSTX370

Normal starts, class 10, inside delta, ordering details

Rated operational voltage U_e , 208-600 V

Rated control supply voltage U_s , 100-250 V AC, 50/60 Hz



PSTX210 ... PSTX370

1SFC132058V0001

415V Pe kW	IEC Max rated operational Ie A	Type	Ordering code	L.P. (₹)
25	30	PSTX30-600-70	1SFA898103R7000	Upon request
30	37	PSTX37-600-70	1SFA898104R7000	
37	44	PSTX45-600-70	1SFA898105R7000	
55	60	PSTX60-600-70	1SFA898106R7000	
59	72	PSTX72-600-70	1SFA898107R7000	
75	85	PSTX85-600-70	1SFA898108R7000	
90	106	PSTX105-600-70	1SFA898109R7000	
132	143	PSTX142-600-70	1SFA898110R7000	
160	171	PSTX170-600-70	1SFA898111R7000	
184	210	PSTX210-600-70	1SFA898112R7000	
220	250	PSTX250-600-70	1SFA898113R7000	
257	300	PSTX300-600-70	1SFA898114R7000	
355	370	PSTX370-600-70	1SFA898115R7000	
450	470	PSTX470-600-70	1SFA898116R7000	
540	570	PSTX570-600-70	1SFA898117R7000	
710	720	PSTX720-600-70	1SFA898118R7000	
800	840	PSTX840-600-70	1SFA898119R7000	
1000	1050	PSTX1050-600-70	1SFA898120R7000	
1200	1250	PSTX1250-600-70	1SFA898121R7000	

Soft starter communication accessories



EtherNet/IP (2-port)
Modbus TCP (2-port)
Profinet (2-port)



EtherNet/IP (1-port)
Modbus TCP (1-port)



Profibus
Modbus-RTU

For communication protocol	Type	Ordering code	L.P. (₹)
Profibus	AB-PROFIBUS-1	1SFA899300R1001	Upon request
Devicenet	AB-DEVICENET-1	1SFA899300R1002	
Modbus-RTU	AB-MODBUS-RTU-1	1SFA899300R1003	
EtherNet/IP (1-port)	AB-ETHERNET-IP-1	1SFA899300R1005	
EtherNet/IP (2-port)	AB-ETHERNET-IP-2	1SFA899300R1006	
Modbus TCP (1-port)	AB-MODBUS-TCP-1	1SFA899300R1007	
Modbus TCP (2-port)	AB-MODBUS-TCP-2	1SFA899300R1008	
Profinet (2-port)	AB-PROFINET-2	1SFA899300R1010	

AFS contactors with front-mounted auxiliary contact blocks

Dedicated for safety applications

ABB's complete range of safety components make protection systems easier to build. Designed for machine safety applications, AFS contactors come with fixed front auxiliary

contact blocks, making them ideal for monitoring and controlling circuits. Mechanically linked and mirror contacts help make your system safer.



Safety and protection

Safety in all things

ABB's AFS contactors can be easily integrated in machine manufacturer's systems complying with main safety standards EN ISO 13849 and EN 62061 guaranteeing the safe use of your machinery and equipment. The AFS contactor range is an integral part of ABB's comprehensive range of safety products.



Continuous operation

Secure uptime

The AFS contactor secures system uptime. It allows direct control by relay outputs of safety PLCs and safety relays to ensure the safety performance customers require. A low energy auxiliary contact guarantees system status feedback.



Speed up your projects

Simplify design

Perfect design makes integration easier. ABB's distinctive yellow auxiliary contact block makes identifying the right product quicker. By reducing the contactor coil's power consumption, panels can also be made smaller and transformers more compact. In addition, all the safety data for the contactors are readily available using safety design tools.


Note: Contact our nearest sales office for more information

M mini contactors and contactor relays **NEW**

Reliability, always



The M contactors range is a performance-dimension optimized solution for all the purposes. Its high reliability, even in extreme conditions, combined to the small sizes and the safe connections lead to easy design and compact panels.



Space-saving

Small dimensions for big projects

The M range devices are a great solution when high performances are needed but the space is limited. The small dimensions of the products and the possibility to mount them side by side will maximize the cost efficiency of the cabinets without making compromises.



Reliability in extreme conditions

Made for all the applications

The technology used in the design of the contactors and the wide set of variants available guarantee reliability of operation with heavy working conditions as well. Instability of the network, high altitude and extreme temperatures will not be a limit anymore.





Optimum interface

Never without a solution

A wide set of coils is provided for matching all the requirements: pure AC or DC for very fast switching, with low energy consumption for direct control by PLC and with extended operating limits to face voltage fluctuations. A complete offer for realizing your projects.

M mini contactors and contactor relays **NEW**


Efficient - High performances in small dimensions

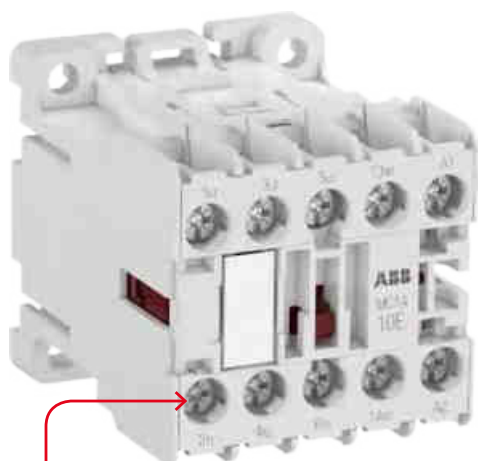

Screw

Screw terminals

The same screw is used for all the terminals and circuits of the device for an efficient and fast screwing. The connection is always stable, the range of usable wire dimensions wide and the maintenance easy.

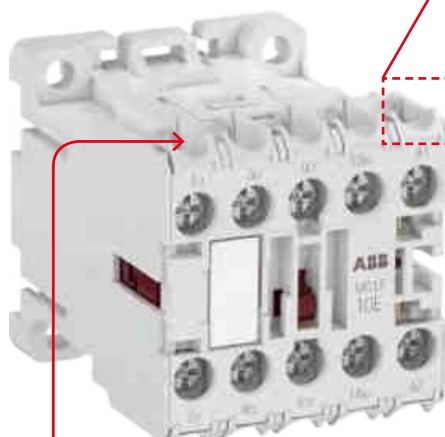

Ring tongue ferrules

With specific screw terminal

A large set of contactors and contactor relays is equipped with specific screw terminals; these allow quick and simple installations using ring tongue ferrules. A must for applications with shocks and vibrations and when the solidity of the connection is a crucial factor.

Lugs easy connection



Wide range of accessories

Up to 6 auxiliary contacts can be mounted on the devices, on the side or the front and with both the connection types. Electronic timers, surge suppressors and parallel connection links are also available in the assortment.



Assemble your reversing starter

Thanks to the mechanical interlock and the connection sets a compact reversing starter can be easily assembled for motor controlling in both directions. Auxiliary contact blocks can be installed on the front or on both sides of the reversing contactor.



Compact protection


The M mini contactors are fully compatible with the T16 thermal overload relays for creating a very compact but still effective solution to defend your loads against current overloads and phase failures.

Electronic compact starters: HF range

A compact solution with great functionality

ABB's electronic compact starter, up to 3 kW / 400 V, is a 22.5 mm wide product. Even though its compact, it has, direct-on-line, reversed starting, motor overload

protection, and emergency stop all included. It is well suited for paper machines, conveyors or machine tools.



Space saving

Up to 90% less space required

Decrease your cabinet size.

ABB's electronic compact starter is 22.5 mm wide while still containing motor starting functionalities and embedding motor protection and safety.



Safety and protection

Integrated safety function

Protect your personnel with emergency stop version complying with SIL3, PL e safety standards. Extend equipment life time and decrease maintenance cost as our starters service life is 10 times higher than electromechanical solutions.



Easy to install

Up to 75% reduced time in wiring

Wiring time upon installation is reduced to a minimum as motor protection, reversing function and emergency stop are already part of the product. Only one component to install reduces the risk of wiring errors.

Pilot devices

Pilot Devices Offering

ABB Pilot Devices offers both modular and compact range of pushbuttons. Both feature the same front-of-panel design and appear consistent when combined.

Modular range, features a wide range of operators that can be combined with high flexibility. The unique snap-on design promotes simple and fast assembly.

Compact range features an all-in-one construction and rugged design for added simplicity and ease of installation.



Modular range

Technical data compact range

Standard and approvals	
IEC / EN 60947-1	Low-voltage switchgear and controlgear - Part 1: General rules
IEC / EN 60947-5-1	Low-voltage switchgear and controlgear - Part 5-1: Control circuit devices and switching elements - Electromechanical control circuit devices
IEC / EN 60947-5-5	Low-voltage switchgear and controlgear - Part 5-5: Control circuit devices and switching elements - Electrical emergency stop device with mechanical latching function
IEC / EN 60073	Basic and safety principles for man-machine
IEC / EN 60529	Degrees of protection provided by enclosures (IP Code)
EN 50013	Low-voltage switchgear and controlgear for industrial use - Terminal marking and distinctive number for particular control switches
DIN 40050-9	Road vehicles; degrees of protection (IP-code); protection against foreign objects; water and contact; electrical equipment
UL 508	Industrial control equipment
CSA C22.2 No 14	Industrial control equipment

Environmental data

Degrees of protection

Pilot device:	IEC/EN DIN	UL/CSA
Pushbutton	IP66, IP67 and IP69K	Type 1, 3R, 4, 4X, 12, 13
Selector switch	IP66, IP67 and IP69K	Type 1, 3R, 4, 4X, 12, 13
Pilot light	IP66, IP67 and IP69K	Type 1, 3R, 4, 4X, 12, 13
Emergency stops	IP66, IP67 and IP69K	Type 1, 3R, 4, 4X, 12, 13
Terminals	IP20	

Temperature

Ambient temperature during operation	-25 to +70 °C
Storage temperature	-40 to +85 °C

Technical data

Cable connections

Operator	Cable terminal
Pushbutton Selector switch Emergency stop	Plus-minus Pozidriv No. 2 Connectable area: min. 1 x 0.5 mm ² /1 x AWG22 max. 2 x 1.5 mm ² /2 x AWG14

Tightening torque

Operators, M22	Min. 2 Nm / Max. 2.3 Nm
Pushbutton and selector switch	Cable terminals M3, 0.8 Nm
Pilot light	Cable terminals M3.5, 0.9 Nm
Emergency stop	Cable terminals M3, 0.8 Nm

Electrical data

Electrical ratings

Contacts

Ratings as per IEC 60947-5-1


Rated insulation voltage, U _i	300 V
Rated thermal current, I _{th}	5 A
Rated operational current, I _e utilisation category AC-15	at: 240 V 1 A
Rated operational current, I _e utilization category DC-13,	at: 24 V 0.3 A at: 125 V 0.2 A

Ratings as per UL, CSA, NEMA

	C300 AC	R300 DC
Rated insulation voltage	250 V	250 V
Rated thermal current	2.5 A	1 A
Rated operational current	at: 120 V 1.5 A at: 125 V 0.75 A at: 240 V 0.75 A at: 250 V 0.11 A	0.22 A 0.11 A

Short circuit protection

Max. fuse at 1 kA	gG 10A
Make-and-break contacts	

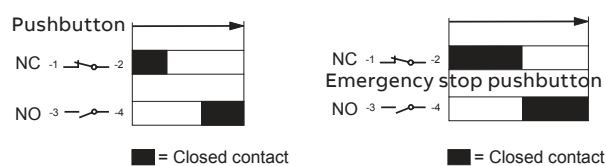

LEDs (for both compact and modular)

Service life for LED's means number of service hours until the brightness has been reduced down 50 %. Service life 50 000 h

White LEDs	x=0.31 Y=3.2 means the position of color in the ICI Chromaticity Diagram
Over voltage on LEDs	10 % overvoltage is acceptable without affecting the service life
Voltage peaks on LEDs	Voltage peaks up to 1000 V Current peaks up to 500 mA during a few msec
Gloaming light	All integrated LEDs have a function built in to cut leakage currents

Mechanical data

Mechanical life

Pushbuttons, selector switches	500 000 operations
Emergency stop pushbutton	50 000 operations

Pilot devices

Compact range

Order example:

Ex 1: Type CP1-10 ■-10, to order color red replace ■ with R: CP1-10 R-10

Ex 2: Ordering code 1SFA619100R101 □ To order color red replace □ with 1: 1SFA619100R1011 ■

Color codes							
	Red ●	Green ●	Yellow ●	Blue ●	White ○	Black ●	Grey ●
Type ■	R	G	Y	L	W	B	U
Ordering code □	1	2	3	4	5	6	7



Non-illuminated flush Push-button with black plastic bezel

Non-illuminated flush pushbutton				
	Type	Pack size	Ordering code	L.P.(₹)
Momentary				
1 NO	CP1-10 □-10	1 X 10	1SFA619100R101 □	110
2 NO	CP1-10 □-20	1 X 10	1SFA619100R102 □	162
1 NC	CP1-10 □-01	1 X 10	1SFA619100R104 □	110
2 NC	CP1-10 □-02	1 X 10	1SFA619100R105 □	162
1 NO+1 NC	CP1-10 □-11	1 X 10	1SFA619100R107 □	162
Maintained				
1 NO	CP2-10 □-10	1 X 10	1SFA619101R101 □	152
2 NO	CP2-10 □-20	1 X 10	1SFA619101R102 □	184
1 NC	CP2-10 □-01	1 X 10	1SFA619101R104 □	148
2 NC	CP2-10 □-02	1 X 10	1SFA619101R105 □	184
1 NO+1 NC	CP2-10 □-11	1 X 10	1SFA619101R107 □	204



Non-illuminated extended Push-button with black plastic bezel

Non-illuminated extended pushbutton				
	Type	Pack size	Ordering code	L.P.(₹)
Momentary				
1 NO	CP3-10 ■-10	1 X 10	1SFA619102R101 □	131
2 NO	CP3-10 ■-20	1 X 10	1SFA619102R102 □	183
1 NC	CP3-10 ■-01	1 X 10	1SFA619102R104 □	142
2 NC	CP3-10 ■-02	1 X 10	1SFA619102R105 □	187
1 NO+1 NC	CP3-10 ■-11	1 X 10	1SFA619102R107 □	204
Maintained				
1 NO	CP4-10 ■-10	1 X 10	1SFA619103R101 □	152
2 NO	CP4-10 ■-20	1 X 10	1SFA619103R102 □	180
1 NC	CP4-10 ■-01	1 X 10	1SFA619103R104 □	152
2 NC	CP4-10 ■-02	1 X 10	1SFA619103R105 □	187
1 NO+1 NC	CP4-10 ■-11	1 X 10	1SFA619103R107 □	208

Pilot devices

Compact range











Pilot Light with intergrated LED,
with leakage current protection

































Pilot Light with intergrated LED,
with leakage current protection



Pilot Light with intergrated LED,
with leakage current protection

Color codes						
	Red 	Green 	Yellow 	Blue 	White 	Amber 
Type 	R	G	Y	L	W	A
Ordering code 	1	2	3	4	5	9

Pilot light with integrated LED			
Type	Pack size	Ordering code	L.P.(₹)
24 V, AC/DC			
CL-502R	1 X 10	1SFA619402R5021 	152
CL-502G	1 X 10	1SFA619402R5022 	
CL-502Y	1 X 10	1SFA619402R5023 	
CL-502L	1 X 10	1SFA619402R5024 	294
CL-502W	1 X 10	1SFA619402R5025 	152
CL-502A	1 X 10	1SFA619402R5029 	
110-130 V, AC			
CL-513R	1 X 10	1SFA619402R5131 	152
CL-513G	1 X 10	1SFA619402R5132 	
CL-513Y	1 X 10	1SFA619402R5133 	
CL-513L	1 X 10	1SFA619402R5134 	294
CL-513W	1 X 10	1SFA619402R5135 	152
CL-513A	1 X 10	1SFA619402R5139 	
110-130 V, DC			
CL-515R	1 X 10	1SFA619402R5151 	152
CL-515G	1 X 10	1SFA619402R5152 	
CL-515Y	1 X 10	1SFA619402R5153 	
CL-515L	1 X 10	1SFA619402R5154 	294
CL-515W	1 X 10	1SFA619402R5155 	152
CL-515A	1 X 10	1SFA619402R5159 	
220 V, DC			
CL-520R	1 X 10	1SFA619402R5201 	152
CL-520G	1 X 10	1SFA619402R5202 	
CL-520Y	1 X 10	1SFA619402R5203 	
CL-520L	1 X 10	1SFA619402R5204 	294
CL-520W	1 X 10	1SFA619402R5205 	152
CL-520A	1 X 10	1SFA619402R5209 	
230 V, AC			
CL-523R	1 X 10	1SFA619402R5231 	152
CL-523G	1 X 10	1SFA619402R5232 	
CL-523Y	1 X 10	1SFA619402R5233 	
CL-523L	1 X 10	1SFA619402R5234 	294
CL-523W	1 X 10	1SFA619402R5235 	152
CL-523A	1 X 10	1SFA619402R5239 	

Note:
48 V AC/DC, 60 V AC/DC, 380 V AC and 415 V AC Pilot devices are available with ABB range of Pilot lamps L.P.(₹)s will be available upon request

Pilot devices

Compact range



Non-illuminated black selector switch with plastic bezel

Selector switch				
	Type	Pack size	Ordering code	L.P. (₹)
Maintained / Two-positions				
1 NO	C2SS1-10B-10	1 X 10	1SFA619200R1016	257
2 NO	C2SS1-10B-20	1 X 10	1SFA619200R1026	283
1 NC	C2SS1-10B-01	1 X 10	1SFA619200R1046	257
2 NC	C2SS1-10B-02	1 X 10	1SFA619200R1056	284
1 NO+1 NC	C2SS1-10B-11	1 X 10	1SFA619200R1076	
Maintained / Two-positions				
1 NO	C2SS2-10B-10	1 X 10	1SFA619201R1016	257
2 NO	C2SS2-10B-20	1 X 10	1SFA619201R1026	284
1 NC	C2SS2-10B-01	1 X 10	1SFA619201R1046	257
2 NC	C2SS2-10B-02	1 X 10	1SFA619201R1056	284
1 NO+1 NC	C2SS2-10B-11	1 X 10	1SFA619201R1076	
Momentary / Two-positions				
1 NO	C2SS3-10B-10	1 X 10	1SFA619202R1016	247
2 NO	C2SS3-10B-20	1 X 10	1SFA619202R1026	284
1 NC	C2SS3-10B-01	1 X 10	1SFA619202R1046	247
2 NC	C2SS3-10B-02	1 X 10	1SFA619202R1056	284
1 NO+1 NC	C2SS3-10B-11	1 X 10	1SFA619202R1076	
Maintained / Three-positions				
2 NO	C3SS1-10B-20	1 X 10	1SFA619210R1026	284
2 NC	C3SS1-10B-02	1 X 10	1SFA619210R1056	
1 NO+1 NC	C3SS1-10B-11	1 X 10	1SFA619210R1076	
Momentary / Three-positions				
2 NO	C3SS2-10B-20	1 X 10	1SFA619211R1026	284
2 NC	C3SS2-10B-02	1 X 10	1SFA619211R1056	
1 NO+1 NC	C3SS2-10B-11	1 X 10	1SFA619211R1076	
Momentary / Three-positions				
2 NO	C3SS3-10B-20	1 X 10	1SFA619212R1026	284
2 NC	C3SS3-10B-02	1 X 10	1SFA619212R1056	
1 NO+1 NC	C3SS3-10B-11		1SFA619212R1076	

Pilot devices

Compact range



Non-illuminated emergency stop pushbutton, 30 mm



Non-illuminated emergency stop pushbutton, 40 mm



Non-illuminated machine stop pushbutton, pull release, 30 mm



Non-illuminated machine stop pushbutton, push release, 30 mm

Emergency stop pushbutton					
Description	Type	Pack size	Ordering code	L.P.(₹)	
•	Twist release				
1 NC Ø 30 mm	CE3T-10R-01	1	1SFA619500R1041 ■	200	
2 NC Ø 30 mm	CE3T-10R-02	1	1SFA619500R1051	255	
1NO+1NC Ø 30 mm	CE3T-10R-11	1	1SFA619500R1071	247	
	Pull release				
2 NC Ø 30 mm	CE3P-10R-02	1	1SFA619501R1051	250	
1NO+1NC Ø 30 mm	CE3P-10R-11	1	1SFA619501R1071	288	
	Key release: Ronis 455, key code 71				
2 NC Ø 30 mm	CE3K1-10R-02	1	1SFA619502R1051	760	
1NO+1NC Ø 30 mm	CE3K1-10R-11	1	1SFA619502R1071		
	Twist release				
1 NC Ø 40 mm	CE4T-10R-01	1	1SFA619550R1041 ■	205	
2 NC Ø 40 mm	CE4T-10R-02	1	1SFA619550R1051 ■	260	
1NO+1NC Ø 40 mm	CE4T-10R-11	1	1SFA619550R1071 ■		
	Pull release				
2 NC Ø 40 mm	CE4P-10R-02	1	1SFA619551R1051 ■	264	
1NO+1NC Ø 40 mm	CE4P-10R-11	1	1SFA619551R1071		
	Key release: Ronis 455, key code 71				
2 NC Ø 40 mm	CE4K1-10R-02	1	1SFA619552R1051	815	
1NO+1NC Ø 40 mm	CE4K1-10R-11	1	1SFA619552R1071		

Machine stop					
Description	Type	Pack size	Ordering code	L.P.(₹)	
•	Twist release				
1NO+1NC Ø 30 mm	CE3T-10B-11	1	1SFA619500R1076	247	
	Pull release				
1NO+1NC Ø 30 mm	CE3P-10B-11	1	1SFA619501R1076	580	
	Key release: Ronis 455, Key code 71				
1NO+1NC Ø 30 mm	CE3K1-10B-11	1	1SFA619502R1076	810	
	Twist release				
1NO+1NC Ø 40 mm	CE4T-10B-11	1	1SFA619550R1076	247	
	Pull release				
1NO+1NC Ø 40 mm	CE4P-10B-11	1	1SFA619551R1076	580	
	Key release: Ronis 455, Key code 71				
1NO+1NC Ø 40 mm	CE4K1-10B-11	1	1SFA619552R1076	810	









Pilot devices

Compact range



Buzzer						
Description	Sound output	Rated current mA	Type	Pack size	Ordering code	L.P.(₹)
Rated voltage 24 V, AC/DC						
● Black	Continuous	40	CB1-620B	1	1SFA619600R6206	1,181
● Black	Pulsation	48	CB1-630B	1	1SFA619600R6306	
Rated voltage 230 V, AC						
● Black	Continuous	40	CB1-623B	1	1SFA619600R6236	1,181
● Black	Pulsation	40	CB1-633B	1	1SFA619600R6336	
Rated voltage 110-130 V, DC						
● Black	Continuous	15	CB1-622B	1	1SFA619600R6226	1,181
● Black	Pulsation	15	CB1-632B	1	1SFA619600R6326	
Rated voltage 110-130 V, AC						
● Black	Continuous	40	CB1-621B	1	1SFA619600R6216	1,181
● Black	Pulsation	45	CB1-631B	1	1SFA619600R6316	



Assembled compact emergency stop enclosures				
Description	Type	Pack size	Ordering code	L.P.(₹)
1-seat plastic enclosure (yellow)				
  Twist release. Red button 2 NC	CEPY1-1001	1	1SFA619821R1001	Upon Request
  Pull release. Red button 2 NC	CEPY1-1002	1	1SFA619821R1002	
Emergency stop enclosure with shroud				
  Twist release. Red button 2 NC	CEPY1-2002	1	1SFA619821R2002	Upon Request
  Pull release. Red button 2 NC	CEPY1-2001	1	1SFA619821R2001	



Assembled compact emergency stop enclosures					
Description	Type	Pack size	Ordering code	L.P.(₹)	
1-seat plastic enclosure with black mushroom pushbutton (dark grey)					
■ □ Twist release. Black button 1 NO + 1 NC	CEP1-1001	1	1SFA619811R1001	Upon Request	
■ □ Pull release. Black button 1 NO + 1 NC	CEP1-1002	1	1SFA619811R1002		
Machine stop enclosure with shroud					
■ □ Twist release. Black button 1 NO + 1 NC	CEP1-2001	1	1SFA619811R2001	Upon Request	
■ □ Pull release. Black button 1 NO + 1 NC	CEP1-2002	1	1SFA619811R2002		

Pilot devices

Technical data modular range

Standard and approvals	
IEC / EN 60947-1	Low-voltage switchgear and controlgear - Part 1: General rules
IEC / EN 60947-5-1	Low-voltage switchgear and controlgear - Part 5-1: Control circuit devices and switching elements - Electromechanical control circuit devices
IEC / EN 60947-5-5	Low-voltage switchgear and controlgear - Part 5-5: Control circuit devices and switching elements - Electrical emergency stop device with mechanical latching function
IEC / EN 60073	Basic and safety principles for man-machine interface, marking and identification - Coding principles for indicators and actuators
IEC / EN 60529	Degrees of protection provided by enclosures (IP Code)
EN 50013	Low-voltage switchgear and controlgear for industrial use - Terminal marking and distinctive number for particular control switches
UL 508	Industrial control equipment
CSA C22.2 No 14	Industrial control equipment

Environmental data		
Degrees of protection		
Operators	IEC/EN	UL/CSA
Pushbutton	IP 66	Type 1, 3R, 4, 4X, 12, 13
Double pushbutton	IP 66	Type 1, 3R, 4, 4X, 12, 13
Mushroom	IP 66	Type 1, 3R, 4, 4X, 12, 13
Emergency stop	IP 66	Type 1, 3R, 4, 4X, 12, 13
Selector switch	IP 66	Type 1, 3R, 4, 4X, 12, 13
Key operated selector switch	IP 66	Type 1, 3R, 4, 4X, 12
Toggle switch	IP 66	Type 1, 3R, 4, 4X, 12, 13
Extreme duty pushbutton	-	Type 1, 3R, 4, 4X
Reset button	IP 66	Type 1, 3R, 4, 4X, 12, 13
Joystick	IP 66, 67, 69K	Type 1, 4X (indoor), 12, 13
Pilot lights	IP 66	Type 1, 3R, 4, 4X, 12, 13
Buzzer	IP 65	Type 4X
Potentiometer	IP 66	Type 1, 3R, 4, 4X, 12, 13
Contact block and transformer block	IP 20	-
Plastic enclosures	IP 66	Type 1, 3R, 4, 4X, 12, 13
Metallic enclosures	IP 66, 67, 69K	-

Temperature	
Ambient temperature during operation	-25 to +70 °C
Storage temperature	-40 to +85 °C

Technical data	
Terminals	
Plus-minus Pozidriv No.2 screw with DIN-washer	
Connectable area	min. 1 x 0.5 mm ² AWG 20 max. 2 x 2.5 mm ² /2 x AWG14

Tightening torque	
Operators, M22	Min. 2 Nm / Max. 2.3 Nm
Cable terminals	0.9 Nm
Recommended maximum number of blocks: 6	

Electrical data	
Standards contact blocks	
Mechanical endurance	10 million operations
Self cleaning contacts of silver, NC contact with positive opening. At voltages and currents below 24 V and 5.6 mA we recommended our micro switch blocks or as an alternative, gold plated contacts.	

Ratings as per IEC 60947-5-1		
Rated insulation voltage, U _i	690 V	
Rated thermal current, I _{th}	10 A	
Rated operational current, I _e utilisation category AC 15,	at: 120 V	8 A
	at: 230 V	6 A
	at: 400 V	4 A
	at: 690 V	2 A
Rated operational current, I _e utilisation category DC 13,	at: 24 V	5 A
	at: 125 V	1.1 A
	at: 250 V	0.55 A

Ratings as per UL, CSA, NEMA		A600 AC	Q600 DC
Rated insulation voltage		600 V	600 V
Rated thermal current		10 A	2.5 A
Rated operational current	at: 120 V	6 A	at: 125 V 0.55 A
	at: 240 V	3 A	at: 250 V 0.27 A
	at: 480 V	1.5 A	at: 480 V 0.10 A
	at: 600 V	1.2 A	at: 600 V 0.10 A

Contact resistance	< 25 mΩ	
Compulsory functiontest	at: 5V, 16 mA	
Micro switch block / ratings as per IEC 60947-5-1		
Rated insulation voltage, U _i		125 V
Rated thermal current, I _{th}		3 A
Rated operational current, I _e utilisation category AC 14,	at: 125 V	0.5 A
Rated operational current, I _e utilization category DC 13,	at: 24 V	0.3 A
Rated operational current, I _e utilization category DC 12,	at: 24 V	0.1 A
Minimum switching capacity	3 V DC	1 mA

Ratings as per UL 508		
	125 V AC	3 A
	60 V DC	0.2 A
	48 V DC	0.1 A

Short circuit protection	
Max. fuse at 1 kA	gG 16A
Note: LEDs see technical data compact range	

Mechanical data	
Mechanical life	
Pushbuttons, momentary mushroom	2 million operations
Selector switches. Present standard (no operation of center contact)	500 000 operations
With operation of center contact	250 000 operations
	150 000 operations
Maintained mushroom, pushbutton, key operated selector switch and double pushbutton	500 000 operations
Emergency stop	100 000 operations
Toggle switch	1 million operations

Pilot devices

Modular range




Modular product features

- Widest range of integrated LEDs on the market
- Parts of Range IP 66, 67, 69K
- All range & UL Type 1, 3R, 4, 4X, 12, 13
- Snap-on feature reduces installation time
- Quick release contact holder
- Several bezel colors
- Unique low energy solutions, including wiping action

How to order standard operators:

- Non-illuminated operator + holder
- + contact block(s)
- Illuminated operator + holder
- + contact block(s)
- + lamp block



*Only for illuminated operator

How to order Bezel:

Bezel options	Type	Ordering code
Black plastic	MPX-10X	1SFA611 10X R1XXX

Color codes

	Red ●	Green ●	Yellow ●	Blue ●	White ○	Black ●	Grey ●
Type ■	R	G	Y	L	W	B	U
Ordering code □	1	2	3	4	5	6	7

Ordering example:

Ex 1: Type MP1-10 ■, to order color red replace ■ with R: MP1-10R

Ex 2: Ordering code 1SFA611100R1001 n, to order color red replace □ with 1: 1SFA619100R1001

Operator : Flush button Non-illuminated push button

	Type	Pack size	Ordering code	L.P. (₹)
Momentary	MP1-10 ■	1 X 10	1SFA611100R100 □	47
Maintained	MP2-10 ■	1 X 10	1SFA611101R100 □	74

Operator : Extended button Non-illuminated push button

Momentary	MP3-10 ■	1 X 10	1SFA611102R100 □	74
Maintained	MP4-10 ■	1 X 10	1SFA611103R100 □	74

Color codes

	Red ●	Green ●	Yellow ●	Blue ●	White ○	Black ●	Grey ●	Amber ●
Type ■	R	G	Y	L	W	B	U	AN
Ordering code □	1	2	3	4	5	6	7	9


	Type	Pack size	Ordering code	L.P. (₹)
Operator : Flush button illuminated push button				
Momentary	MP1-11 ■	1 X 10	1SFA611100R110 □	75
	MP1-11AN	1 X 10	1SIN611100R1109	73
Maintained	MP2-11 ■	1 X 10	1SFA611101R110 □	93
	MP2-11AN	1 X 10	1SIN611101R1109	
Operator : Extended button illuminated push button				
Momentary	MP3-11 ■	1 X 10	1SFA611102R110 □	
	MP3-11AN	1 X 10	1SIN611102R1109	
Maintained	MP4-11 ■	1 X 10	1SFA611103R110 □	93
	MP4-11AN	1 X 10	1SIN611103R1109	

Note:

1. Integrated LED block to be considered from MBL range of suitable voltage from page no. 109

Separate holder

Holders for three blocks	MCBH-00	1 X 10	1SFA611605R1100	19
Contact blocks only (without holder)				
1 NO	MCB-10	1 X 10	1SFA611610R1001 ■	63
1 NC	MCB-01	1 X 10	1SFA611610R1010 ■	63



Blocks and holder

■ Stock items

Pilot devices

Modular range



LED lamp block with built in leakage currage protection

Operator : Pilot lights				
	Type	Pack size	Ordering code	L.P.(₹)
● Red	ML1-100R	1 X 10	1SFA611400R1001 ■	56
● Green	ML1-100G	1 X 10	1SFA611400R1002 ■	
● Yellow	ML1-100Y	1 X 10	1SFA611400R1003 ■	
● Blue	ML1-100L	1 X 10	1SFA611400R1004	
○ White	ML1-100W	1 X 10	1SFA611400R1005	
● Amber	ML1-100AN	1 X 10	1SIN611400R1009	
Separate holder				
	Type	Pack size	Ordering code	L.P.(₹)
Holders for three blocks	MCBH-00	1 X 10	1SFA611605R1100 ■	19
Lamp blocks with integrated LED				
Rated voltage 24 V, AC/DC				
	Type	Pack size	Ordering code	L.P.(₹)
● Red	MLBL-01R	1 X 10	1SFA611621R1011 ■	137
● Green	MLBL-01G	1 X 10	1SFA611621R1012 ■	
● Yellow	MLBL-01YN	1 X 10	1SIN611621R1013	306
● Blue	MLBL-01L	1 X 10	1SFA611621R1014 ■	
○ White	MLBL-01W	1 X 10	1SFA611621R1015 ■	137
● Amber	MLBL-01A	1 X 10	1SFA611621R1016	
Rated voltage 110-130 V, AC				
	Type	Pack size	Ordering code	L.P.(₹)
● Red	MLBL-04R	1 X 10	1SFA611621R1041	137
● Green	MLBL-04G	1 X 10	1SFA611621R1042	
● Yellow	MLBL-04YN	1 X 10	1SIN611621R1043	306
● Blue	MLBL-04L	1 X 10	1SFA611621R1044	
○ White	MLBL-04W	1 X 10	1SFA611621R1045	137
● Amber	MLBL-04A	1 X 10	1SFA611621R1046	
Rated voltage 110-130 V, DC				
	Type	Pack size	Ordering code	L.P.(₹)
● Red	MLBL-05R	1 X 10	1SFA611621R1051	137
● Green	MLBL-05G	1 X 10	1SFA611621R1052	
● Yellow	MLBL-05YN	1 X 10	1SIN611621R1053	306
● Blue	MLBL-05L	1 X 10	1SFA611621R1054	
○ White	MLBL-05W	1 X 10	1SFA611621R1055	137
● Amber	MLBL-05A	1 X 10	1SFA611621R1056	
Rated voltage 220 V, DC				
	Type	Pack size	Ordering code	L.P.(₹)
● Red	MLBL-06R	1 X 10	1SFA611621R1061	137
● Green	MLBL-06G	1 X 10	1SFA611621R1062	
● Yellow	MLBL-06YN	1 X 10	1SIN611621R1063	323
● Blue	MLBL-06L	1 X 10	1SFA611621R1064	
○ White	MLBL-06W	1 X 10	1SFA611621R1065	137
● Amber	MLBL-06A	1 X 10	1SFA611621R1066	
Rated voltage 230 V, AC				
	Type	Pack size	Ordering code	L.P.(₹)
● Red	MLBL-07R	1 X 10	1SFA611621R1071	137
● Green	MLBL-07G	1 X 10	1SFA611621R1072 ■	
● Yellow	MLBL-07YN	1 X 10	1SIN611621R1073	323
● Blue	MLBL-07L	1 X 10	1SFA611621R1074 ■	
○ White	MLBL-07W	1 X 10	1SFA611621R1075	137
● Amber	MLBL-07A	1 X 10	1SFA611621R1076	

Note: 48 V AC/DC, 60 V AC/DC, 380 V AC and 415 V AC L.P.(₹)s will be available upon request

■ Stock items

Pilot devices

Modular range



Operator : Emergency stop pushbutton				
	Type	Pack size	Ordering code	L.P.(₹)
●	Ø 30 mm / Non-illuminated			
Twist release	MPET3-10R	1	1SFA611520R1001	390
Pull release	MPEP3-10R	1	1SFA611521R1001	
Key release code 71/Ronis 455	MPEK3-11R	1	1SFA611522R1101	
Key release code 72/ Ronis 421	MPEK3-12R	1	1SFA611522R1201	767
Key release code 73/ Ronis 3433-E	MPEK3-13R	1	1SFA611522R1301	
Ø 40 mm / Non-illuminated				
Twist release	MPET4-10R	1	1SFA611523R1001	340
Pull release	MPEP4-10R	1	1SFA611524R1001	727
Key release code 71/Ronis 455	MPEK4-11R	1	1SFA611525R1101	747
Key release code 72/ Ronis 421	MPEK4-12R	1	1SFA611525R1201	
Key release code 73/ Ronis 3433-E	MPEK4-13R	1	1SFA611525R1301	
Ø 60 mm /Non-illuminated				
Twist release	MPMT4-10R	1	1SFA611513R1001	614
Pull release	MPMP4-10R	1	1SFA611514R1001	509
Ø 40 mm / Illuminated				
Twist release	MPMT3-11R	1	1SFA611510R1101 ■	588
Pull release	MPMP3-11R	1	1SFA611511R1101	473
Ø 60 mm / Illuminated				
Twist release	MPMT4-11R	1	1SFA611513R1101	803
Pull release	MPMP4-11R		1SFA611514R1101	646

Refer holder and contact block configuration for standard operator from page no. 110



Operator : Machine stop pushbutton				
	Type	Pack size	Ordering code	L.P.(₹)
●	Ø 30 mm			
Twist release	MPET3-10B	1	1SFA611520R1006	390
Pull release	MPEP3-10B	1	1SFA611521R1006	
Key release	MPEK3-10B	1	1SFA611522R1106	
	Ø 40 mm			
Twist release	MPET4-10B	1	1SFA611523R1006	390
Pull release	MPEP4-10B	1	1SFA611524R1006	

Refer holder and contact block configuration for standard operator from page no. 110



Operator : Double pushbutton				
	Type	Pack size	Ordering code	L.P.(₹)
● Upper ● Lower	Extended lower button / Non-illuminated			
I / O	MPD13-11B	1	1SFA611142R1106	411
START / STOP	MPD15-11B	1	1SFA611144R1106	
● Upper ● Lower	Extended lower button / Illuminated			
I / O	MPD13-11C	1	1SFA611142R1108	614
START / STOP	MPD15-11C	1	1SFA611144R1108	
● Upper ● Lower	○ Upper Extended lower button / ● Lower Non-illuminated			
I / O	MPD17-11B	1	1SFA611146R1106	411

Refer holder and contact block configuration for standard operator

Pilot devices

Modular range



Operator: non-illuminated black two-position selector switch

Type	Pack size	Ordering code	L.P.(₹)
Maintained / Short handle			
M2SS1-10B	1	1SFA611200R1006	271
Maintained / Short handle			
M2SS2-10B	1	1SFA611201R1006	271
Momentary / Short handle, spring return from C to B			
M2SS3-10B	1	1SFA611202R1006	281
Maintained / Long handle			
M2SS4-10B	1	1SFA611203R1006	827
Maintained / Long handle			
M2SS5-10B	1	1SFA611204R1006	827
Momentary / Long handle, spring return from C to B			
M2SS6-10B	1	1SFA611205R1006	848

Refer holder and contact block configuration for standard operator

Operator: non-illuminated black three-position selector switch

Type	Pack size	Ordering code	L.P.(₹)
Maintained / Short handle			
M3SS1-10B	1	1SFA611210R1006	271
Momentary / Short handle, spring return from A to B and C to B			
M3SS2-10B	1	1SFA611211R1006	281
Momentary / Short handle, spring return from C to B			
M3SS3-10B	1	1SFA611212R1006	281
Momentary / Short handle, spring return from A to B			
M2SS7-10B	1	1SFA611216R1006	281
Maintained / Long handle			
M3SS4-10B	1	1SFA611213R1006	827
Momentary / Long handle, spring return from A to B and C to B			
M3SS5-10B	1	1SFA611214R1006	815
Momentary / Long handle, spring return from C to B			
M3SS6-10B	1	1SFA611215R1006	1,072
Momentary / Long handle, spring return from A to B			
M2SS8-10B	1	1SFA611217R1006	770

Refer holder and contact block configuration for standard operator

Operator: non-illuminated black three-position selector switch with operation of center position

Type	Pack size	Ordering code	L.P.(₹)
Short handle			
M3SSC1-10B	1	1SFA611250R1006	300
M3SSC2-10B	1	1SFA611251R1006	
M3SSC3-10B	1	1SFA611252R1006	
M3SSC7-10B	1	1SFA611256R1006	
Long handle			
M3SSC4-10B	1	1SFA611253R1006	874
M3SSC5-10B	1	1SFA611254R1006	
M3SSC6-10B	1	1SFA611255R1006	

Refer holder and contact block configuration for standard operator

Pilot devices

Modular range





Operator : Key operated selector switch				
	Type		Pack size	Ordering code
●	Maintained / Two positions (The key can be removed in both position)			
71/Ronis 455	M2SSK1-101		1	1SFA611280R1001
72/Ronis 421	M2SSK1-102		1	1SFA611280R1002
73/Ronis 3433-E	M2SSK1-103		1	1SFA611280R1003
Random selection*)	M2SSK1-104		1	1SFA611280R1004
	Maintained / Two positions (The key can be removed in position B only)			
71/Ronis 455	M2SSK2-101		1	1SFA611281R1001
72/Ronis 421	M2SSK2-102		1	1SFA611281R1002
73/Ronis 3433-E	M2SSK2-103		1	1SFA611281R1003
Random selection*)	M2SSK2-104		1	1SFA611281R1004
	Momentary / Two positions, spring return from C to B (The key can be removed in position B only)			
71/Ronis 455	M2SSK3-101		1	1SFA611282R1001
72/Ronis 421	M2SSK3-102		1	1SFA611282R1002
73/Ronis 3433-E	M2SSK3-103		1	1SFA611282R1003
Random selection*)	M2SSK3-104		1	1SFA611282R1004

Refer holder and contact block configuration for standard operator

Operator : Key operated selector switch				
	Type		Pack size	Ordering code
●	Maintained / Three positions (The key can be removed in both position)			
71/Ronis 455	M3SSK1-101		1	1SFA611283R1001
72/Ronis 421	M3SSK1-102		1	1SFA611283R1002
73/Ronis 3433-E	M3SSK1-103		1	1SFA611283R1003
Random selection*)	M3SSK1-104		1	1SFA611280R1004
	Maintained / Three positions (The key can be removed in position B only)			
71/Ronis 455	M3SSK2-101		1	1SFA611284R1001
72/Ronis 421	M3SSK2-102		1	1SFA611284R1002
73/Ronis 3433-E	M3SSK2-103		1	1SFA611284R1003
Random selection*)	M3SSK2-104		1	1SFA611284R1004
	Momentary / Three positions, spring return from C to B (The key can be removed in position B only)			
71/Ronis 455	M3SSK3-101		1	1SFA611285R1001
72/Ronis 421	M3SSK3-102		1	1SFA611285R1002
73/Ronis 3433-E	M3SSK3-103		1	1SFA611285R1003
Random selection*)	M3SSK3-104		1	1SFA611285R1004

Refer holder and contact block configuration for standard operator




Potentiometer				
	Type		Pack size	Ordering code
●	with resistor 5 kohm			
Black plastic	MT-105B		1	1SFA611410R1056
●	with resistor 10 kohm			
Black plastic	MT-110B		1	1SFA611410R1106
●	with resistor 50 kohm			
Black plastic	MT-150B		1	1SFA611410R1506

Toggle switch*				
	Type		Pack size	Ordering code
●	Maintained / Two-positions			
Black plastic	MTS1-10B		1	1SFA611300R1006
●	Momentary / Three-positions			
Black plastic	MTS2-10B		1	1SFA611301R1006
●	Maintained / Three-positions			
Black plastic	MTS3-10B		1	1SFA611302R1006

Pilot devices

Modular range

• Joystick (holder included)
+ contact blocks

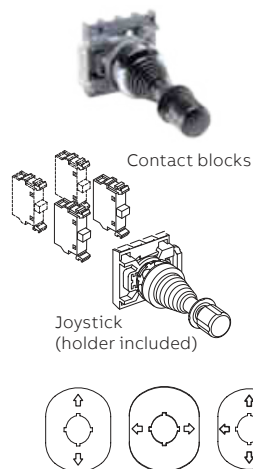

Joystick				
	Type	Pack size	Ordering code	L.P.(₹)
Maintained				
2 - position	MJS1-60B	1	1SFA611701R6006	3,359
4 - position	MJS5-60B	1	1SFA611705R6006	3,691
Spring return				
2 - position	MJS2-60B	1	1SFA611702R6006	3,359
4 - position	MJS6-60B	1	1SFA611706R6006	3,691
Maintained / Latching function				
2 - position	MJS7-60B	1	1SFA611707R6006	3,691
4 - position	MJS11-60B	1	1SFA611711R6006	4,271
Spring return / Latching function				
2 - position	MJS8-60B	1	1SFA611708R6006	3,691
4 - position	MJS12-60B	1	1SFA611712R6006	4,271
Legend plates for joystick				
2 - position	MA6-1240	1	1SFA611930R1240	284
2 - position	MA6-1241	1	1SFA611930R1241	
4 - position	MA6-1242	1	1SFA611930R1242	

Refer holder and contact block configuration for standard operator



Micro switch blocks				
Description	Type	Pack size	Ordering code	L.P.(₹)
1 NO	MCBL-10	1	1SFA611612R1010	510
1 NC	MCBL-01	1	1SFA611612R1001	



Extreme duty pushbutton				
	Type	Pack size	Ordering code	L.P.(₹)
● ● ●	For Ø 30 mm mounting hole			
	KP6-40 ■	1	1SFA616105R400 □	1,425

Refer contact block configuration for standard operator



Reset pushbutton				
	Type	Pack size	Ordering code	L.P.(₹)
● ○	With shaft			
No text	KPR3-100 ■	1	1SFA616162R100 □	442
● ○	Without shaft			
No text	KPR1-100 ■	1	1SFA616160R100 □	333
● ○	Accessories: Shaft (black)			
No text	KA1-8046	1	1SFA616920R8046	137



Accessories				
	Type	Pack size	Ordering code	L.P.(₹)
Mounting tool	MA1-8015	1	1SFA611920R8015	306
Membrane of silicone flush button	KA1-8052	1	1SFA611920R8052	192
Membrane of silicone extended button	KA1-8002	1	1SFA611920R8002	361
Locking nut	MA1-8019	1	1SFA611920R8019	235

*Spacer is needed when legendplates are not used in plastic enclosures

Pilot devices

Enclosures



Empty enclosures



Shroud



DIN-rail adaptor

Empty plastic enclosures for modular and compact range				
Description	Type	Pack size	Ordering code	L.P.(₹)
■ □ 1-seat	MEPY1-0	1	1SFA611821R1000	1,747
■ □ 1-seat	MEP1-0	1	1SFA611811R1000	1,715
■ □ 2-seat	MEP2-0	1	1SFA611812R1000	1,584
■ □ 3-seat	MEP3-0	1	1SFA611813R1000	2,245
■ □ 4-seat	MEP4-0	1	1SFA611814R1000	3,048
■ □ 6-seat	MEP6-0	1	1SFA611816R1000	4,642
Shroud for modular range push button operator				
■ Yellow	MA1-8053	1	1SFA611920R8053	492
■ Grey	MA1-8128	1	1SFA611920R8128	1,480
Empty enclosures for compact range				
■ □ Yellow/Light grey	CEPY1-0	1	1SFA619821R1000	1,490
■ □ Dark grey/Light grey	CEP1-0	1	1SFA619811R1000	1,218
Shroud for compact range push buttons				
■ Yellow	CA1-8053	1	1SFA619920R8053	306
■ Grey	CA1-8054	1	1SFA619920R8054	306
DIN-rail adaptor				
DIN-rail adaptor	MA1-8131	1	1SFA611920R8131	825

Signal towers and signal beacons*



* Price on request

Signal tower and beacons



KL70-401B

1SFC151507F0001



KL70-401Y

1SFC151508F0001



KA4-102...

1SFC151509F0001

Description					
Colors	Red	Green	Yellow	Blue	Clear
Replace ■ in type with	R	G	Y	B	C
Replace □ in Ordering code with	1	2	3	4	8

Description	Type	Ordering code	L.P.(₹)
Light element			
Available in red, green, yellow, blue and clear			
Permanent light, 12-240 V AC/DC For bulb BA 15d. Bulb not included	KL70-401 ■	1SFA616070R401 □	1,830
Blinking light, 24 V AC/DC with integrated LED	KL70-306 ■	1SFA616070R306 □	7,628
Flashing light, 24 V AC/DC with integrated xenon tube	KL70-203 ■	1SFA616070R203 □	10,564
Blinking light, 115 V AC with integrated LED	KL70-342 ■	1SFA616070R342 □	6,859
Flashing light, 115 V AC with integrated xenon tube	KL70-113 ■	1SFA616070R113 □	8,557
Blinking light, 230 V AC with integrated LED	KL70-352 ■	1SFA616070R352 □	7,628
Flashing light, 230 V AC with integrated xenon tube	KL70-123 ■	1SFA616070R123 □	8,190
LED permanent light, 24 V AC/DC with integrated LED	KL70-305 ■	1SFA616070R305 □	7,176
LED rotating light, 24 V AC/DC with integrated LED	KL70-307 ■	1SFA616070R307 □	16,120

Bulbs: Bulb Ba 15d, 42mm, max 7 W for permanent or blinking light			
24 V, 5 W, AC/DC	KA4-1021	1SFA616923R1028	144
115 V, 5 W, AC/DC	KA4-1118	1SFA616923R1118	218
230 V, 5 W, AC/DC	KA4-1148	1SFA616923R1148	229

LED bulbs Ba 15d, 40mA			
Available in red, green, yellow, blue and white			
24 V AC/DC	KA4-102 ■	1SFA616924R102 □	4,482

Audible modules buzzer element. 85 dB, continuous or pulsating tone, adjustable			
24 V AC/DC	KB70-3001	1SFA616071R3001	4,706
115 V AC	KB70-3101	1SFA616071R3101	5,372
115 V AC	KB70-1201	1SFA616071R1201	4,992



Signal towers



KT70-10...

1SFC151510F0001



KA70-1001

1SFC151511F0001



KA70-1034

1SFC151512F0001

Description	Type	Ordering code	L.P.(₹)
Siren element			
Multi function, 8 diff. Tones adjustable, volume adjustable 100 dB, 115 V AC	KS70-1104	1SFA616073R1104	7,868
Multi function, 8 diff. Tones adjustable, volume adjustable 100 dB, 230 V AC	KS70-1204	1SFA616073R1204	7,868
Multi function, 7 diff. Tones adjustable, volume adjustable, 100 dB, 24 V DC	KS70-2004	1SFA616073R2004	8,636
Multi function, 8 diff. Tones adjustable, volume adjustable 100 dB, 24 V AC/DC	KS70-3004	1SFA616073R3004	6,646
Continuous tone alternating 108 dB, 24 V DC	KS70-2002	1SFA616073R2002	5,112

Terminal elements			
For tube mounting, including cap	KT70-1001	1SFA616075R1001	2,683
For bracket or base, including cap	KT70-1002	1SFA616075R1002	2,683

Special parts			
Contact box			
Cable exit at side	KA70-1001	1SFA616077R1001	562
Magnetic base	KA70-1002	1SFA616077R1002	3,500

Base with tube			
D=25 mm L=110 mm	KA70-1011	1SFA616077R1011	1,421

Base for tube			
D=25 mm, plastic	KA70-1012	1SFA616077R1012	681
D=25 mm, metal	KA70-1013	1SFA616077R1013	2,135

Tube, anodized aluminum			
D=25 mm L=250 mm	KA70-1021	1SFA616077R1021	1,142
D=25 mm L=400 mm	KA70-1022	1SFA616077R1022	1,376
D=25 mm L=800 mm	KA70-1023	1SFA616077R1023	2,751

Bracket			
1-sided mounting	KA70-1031	1SFA616077R1031	993
2-sided mounting	KA70-1032	1SFA616077R1032	993
For tube mounting	KA70-1033	1SFA616077R1033	1,050
For surface mounting	KA70-1034	1SFA616077R1034	1,050

Signal beacons



KSB-401G

SFC151513F0001



KASB-100

SFC151514F0001

Description					
Colors	Red	Green	Yellow	Blue	Clear
Replace ■ in type with	R	G	Y	B	C
Replace □ in Ordering code with	1	2	3	4	8

Light element: Available in red, green, yellow, blue and clear

Permanent light, 12-240 V AC/DC. For Bulb BA 15dBulb not included	KSB-401 ■	1SFA616080R401 □	11,669
Flashing light, 24 V DC. With integrated xenon tube	KSB-203 ■	1SFA616080R203 □	11,721
Flashing light, 115 V AC. With integrated xenon tube	KSB-113 ■	1SFA616080R113 □	9,984
Flashing light, 230 V AC. With integrated xenon tube	KSB-123 ■	1SFA616080R123 □	9,984

Light element LED: Available in red, green and yellow

LED permanent light, 24 V AC/DC. With integrated LED	KSB-305 ■	1SFA616080R305 □	12,925
LED blinking light, 24 V AC/DC. With integrated LED	KSB-306 ■	1SFA616080R306 □	12,925
LED rotation light, 24 V AC/DC. With integrated LED	KSB-307 ■	1SFA616080R307 □	11,669

Special parts

Anti-twist device	KASB-100	1SFA616087R1000	445
-------------------	----------	-----------------	-----

Bulbs for signal beacons max 10 W. For permanent light Bulb Ba 15d, 52mm

12 V, 7 W, AC/DC	KA3-1018	1SFA616922R1018	169
24 V, 7 W, AC/DC	KA3-1028	1SFA616922R1028	230
115 V, 7 W, AC/DC	KA3-1118	1SFA616922R1118	268
220-260 V, 7-10 W, AC/DC	KA3-1148	1SFA616922R1118	277

Electronic products and relays

The product range



Time relays, CT range

Three ranges of electronic timers provide timing functions for all applications: the CT-D range with a width of just 17.5 mm; the CT-E and CT-C range, the ideal solution for serial applications; and the CT-S range that has two different types of connection terminals and is ideally suited for universal use. The CT range has a wide variety of timing functions (from ON or OFF delay to star-delta changeover). The time relays are available with output relays, solid-state outputs and precise direct time adjustment.

Measuring and monitoring relays, CM range

State-of-the-art monitors for single and three-phase systems. Monitoring of: voltage, current, frequency, power factor (motor load), thermistors, temperature, liquid level, insulation resistance, and grid feeding. ABB has one of the world's widest product ranges of measuring and monitoring relays. The CM range is a key product line of the EPR range.

Power supplies, CP range

Modern power supply units are a vital component in most areas of energy management and automation technology. As your global partner in this area, ABB pays close attention to corresponding requirements. Innovation is the key to the substantial enlargement of our power supply product range. ABB offers four different product lines for single and three-phase supplies, output voltages 5/12/24, and 48 VDC in plastic and metal enclosure, as well as various accessories.

Interface relays and optocouplers, CR range and R600

Interface relays and optocouplers are widely used in various industrial applications. As an interface, they link the controller, e.g. PLC (programmable logic controller), PC or field bus systems to the sensor/actuator level. Here, they have various functions: switching AC or DC loads with different resistive, inductive and capacitive parts, switching voltages from a few mV up to 250 V, switching currents from a few mA up to 16 A, amplification of weak control signals, electrical isolation of control and load circuits, and signal multiplying.

Temperature monitoring relays CM-TCS & CM-TCN monitor

overtemperature, undertemperature, or temperatures between two threshold values (window monitoring) with PT100 sensor. As soon as the temperature falls below or exceeds the threshold value the output relays change their positions according to the configured functionality and the front-face LEDs display the current status. Regardless of the selected configuration, the device is monitoring its measuring circuit for interrupted wires or short circuits.

Time relays

CT-C, CT-S and CT-D



CT-C range

Operating controls



Connection terminals

Wide terminal spacing makes wiring connections easier: 2 x 1.5 mm² (2 x 16 AWG) with wire end ferrules or 2 x 2.5 mm² (2 x 14 AWG) without ferrules.



Preselection of the time range




Direct reading scales

Direct setting of the time delay without any additional calculation provides accurate time delay adjustment.



Selection of the timing function

- ON-delay
- OFF-delay with aux. voltage
- Impulse-ON
- Impulse-OFF with aux. voltage
- Flasher starting with ON
- Flasher starting with OFF
- Pulse former

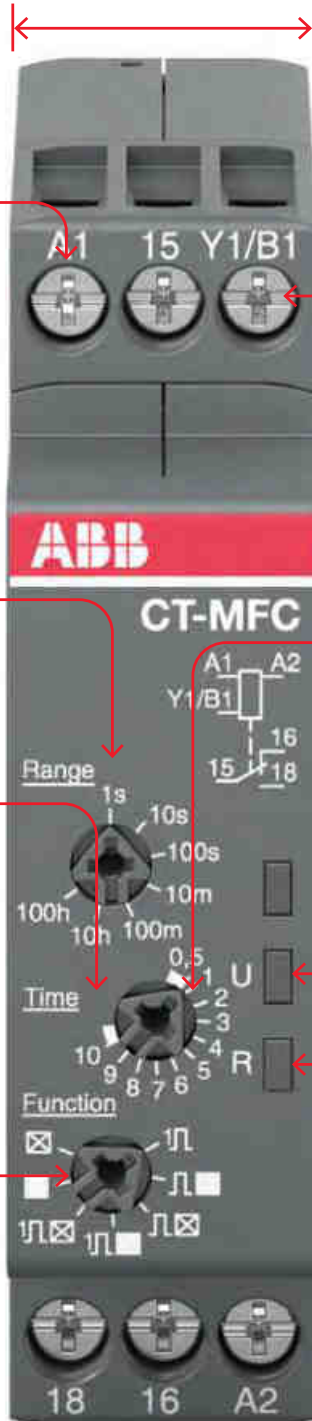

Width 17.5 mm

With a width of just 17.5mm, CT-C time relays are ideal for installations with limited space.

Control input to start timing



Fine adjustment of the time delay



LEDs for status indication

All actual operational states are displayed by front-facing LEDs, simplifying commissioning and troubleshooting.

- U - green LED:
 control supply voltage applied / timing
- R, R1, R2 - yellow LED:
 output relay energized

ABB CT-C Product Portfolio



2CDC251030V0018

CT-MFC.12



2CDC251029V0018

CT-ERC.22

- M Control input with voltage-related triggering
- No triggering

Supply voltage:

24-48 V DC + 24-240 V AC, 12-240 V AC/DC (CT-MFC.21)

Timing range: 0.05s – 100h

Output: 1 c/o, 2 c/o, Solid state

Width: 17.5 mm

Description

The CT-C range combines lower cost with higher value and performance in a slim 17.5 mm-wide housing. All relays have a wide time setting range from 0.05 seconds up to 100 hours. Combined with a wide voltage range they are the perfect choice for applications worldwide.

Ordering details

Type	Ordering code	L.P.(₹)
CT-ERC.12 Time relay, ON-delay 1c/o, 24-48VDC/24-240VAC, Time Range 0.05 s ... 100 h	1SVR508100R0000	2,226
CT-AHC.12 Time relay, OFF-delay 1c/o, 24-48VDC/24-240VAC, Time Range:0.05 s ... 100 h	1SVR508110R0000	2,597
CT-SDC.22 Time relay, star-delta 2n/o, 24-48VDC/24-240VAC, Time Range:0.05 s ... 10 min	1SVR508211R0100	2,968
CT-SAC.22 Time relay, star-delta 2n/o, 24-48VDC/24-240VAC, Time Range:0.05 s ... 10 min	1SVR508210R0100	3,074
CT-ARC.12 Time relay, Dual function 1c/o, 24-48VDC/24-240VAC,w/o aux.supply Time Range:0.05 s ... 10 min	1SVR508120R0000	3,657
CT-MFC.12 Time relay, multifunctional 1c/o, 24-48VDC/24-240VAC, Time Range:0.05 s ... 100 h	1SVR508020R0000	2,703
CT-MKC.31 Time relay, multifunctional solid-state, 12-240VAC/DC, Time Range:0.05 s ... 100 h	1SVR508010R1300	2,968
CT-VWC.12 Time relay, impulse-ON 1c/o, 24-48VDC/24-240VAC, Time Range:0.05 s ... 100 h	1SVR508130R0000	3,922
CT-EBC.12 Time relay, Flasher 1c/o, 0.1-10s, 110-130VAC, Time Range:0.1 ... 10 s	1SVR508150R0000	2,862

- 1) Functions: ON-delay, OFF-delay with auxiliary voltage, Impulse-ON, Impulse-OFF with auxiliary voltage, Flasher starting with ON, Flasher starting with OFF, Pulse former
- 2) ON and OFF times adjustable independently: 2 x 7 time ranges 0.05 s - 100 h
- 3) Transition time 50 ms fixed
- 4) Transition time adjustable



CT-C Range

Electronic products and relays

Electronic timer



**CT-E Range
Till Stock
Available**

ON-delay timers

CT-ERE : 1 c/o contact, 2 LEDs

Type	Rated control supply voltage	Time range	Ordering code	L.P.(₹)*
CT-ERE	24 V AC / DC, 220-240 V AC	0.1-10 s	1SVR550107R1100	Upon request
		0.3-30 s	1SVR550107R4100 ■	
		3-300 s	1SVR550107R2100 ■	
		0.3-30 min	1SVR550107R5100 ■	
	110-130 V AC	0.1-10 s	1SVR550100R1100	
		0.3-30 s	1SVR550100R4100 ■	
		3-300 s	1SVR550100R2100	
		0.3-30 min	1SVR550100R5100	

OFF-delay timers

CT-AHE : 1 c/o contact, 2 LEDs

Type	Rated control supply voltage	Time range	Ordering code	L.P.(₹)*
CT-AHE	24 V AC/DC	0.1-10 s	1SVR550118R1100	Upon request
		0.3-30 s	1SVR550118R4100	
		3-300 s	1SVR550118R2100	
	110-130 V AC	0.1-10 s	1SVR550110R1100	
		0.3-30 s	1SVR550110R4100 ■	
		3-300 s	1SVR550110R2100	
	220-240 V AC	0.1-10 s	1SVR550111R1100	
		0.3-30 s	1SVR550111R4100 ■	
		3-300 s	1SVR550111R2100 ■	

CT-ARE : without auxiliary voltage, 1 c/o contact, 1 LED

Type	Rated control supply voltage	Time range	Ordering code	L.P.(₹)*
CT-ARE	"24 V AC/DC, 220-240 V AC"	0.1-10 s	1SVR550127R1100	Upon request
		0.3-30 s	1SVR550127R4100 ■	
	110-130 V AC	0.1-10 s	1SVR550120R1100	
		0.3-30 s	1SVR550120R4100 ■	

Multifunction timer

CT-MFE : 6 functions, 8 time ranges (0.05 s - 100 h), 1 c/o contact, 2 LEDs

Type	Rated control supply voltage	Time range	Ordering code	L.P.(₹)*
CT-MFE	24-240 V AC/DC	0.05 s - 100 h	1SVR550029R8100 ■	Upon request

Star Delta timers

CT-YDE : ON-delayed, OFF-delayed without auxiliary voltage, 1 c/o contact, 2 LEDs

Type	Rated control supply voltage	Time range	Ordering code	L.P.(₹)*
CT-YDE	24 V AC/DC, 220 -240V AC	0.1-10 s	1SVR550207R1100	Upon request
		0.3-30 s	1SVR550207R4100 ■	
		3-300 s	1SVR550207R2100 ■	
	110-130V AC	0.1-10 s	1SVR550200R1100	
		0.3-30 s	1SVR550200R4100	
		3-300 s	1SVR550200R2100	

* Price valid upto June 2020

■ Stock items

Electronic products and relays

Electronic timer



CT-SDE: ON-delayed with fixed transition time, 1 n/c contact, 1 n/o contact, internally wired, 2 LEDs

Type	Rated control supply voltage	Time range	Ordering code	L.P. (₹)*
CT-SDE	24 V AC/DC, 220-240V AC	0.3-30 s	1SVR550217R4100 ■	Upon request
	110-130V AC		1SVR550210R4100	
	380-415V AC		1SVR550212R4100 ■	

CT-VWE: Impulse-ON, 1 c/o contact

Type	Rated control supply voltage	Time range	Ordering code	L.P. (₹)*
CT-VWE	24 V AC/DC, 220-240 V AC	0.1-10 s	1SVR550137R1100	Upon request
		0.3-30 s	1SVR550137R4100	
		3-300 s	1SVR550137R2100	
	110-130 V AC	0.1-10 s	1SVR550130R1100	
		0.3-30 s	1SVR550130R4100	
		3-300 s	1SVR550130R2100	

CT-AWE: Impulse-OFF, 1 c/o contact

Type	Rated control supply voltage	Time range	Ordering code	L.P. (₹)*
CT-AWE w/o Aux.	24 V AC/DC	0.05-1 s	1SVR550158R3100	Upon request
	110-130 V AC		1SVR550150R3100	
	220-240 V AC		1SVR550151R3100	
CT-AWE with Aux.	24 V AC/DC	0.1-10 s	1SVR550148R1100	
		0.3-30 s	1SVR550148R4100	
		3-300 s	1SVR550148R2100	
	220-240 V AC	0.1-10 s	1SVR550141R1100	
		0.3-30 s	1SVR550141R4100	
		3-300 s	1SVR550141R2100	

CT-EBE: Flasher starting with OFF, 1 c/o contact

Type	Rated control supply voltage	Time range	Ordering code	L.P. (₹)*
CT-EBE	24 V AC/DC, 220-240 V AC	0.1-10 s	1SVR550167R1100	Upon request
	110-130 V AC		1SVR550160R1100	

CT-MFS.21: ON-delay (accumulative), OFF-delay without aux., Symmetrical ON-delay and OFF-delay and Impulse-ON, ON/OFF function, pulse former, star-delta changeover with impulse, Flasher starting with OFF, Flasher starting with ON, impulse -OFF, 2 c/o



Type	Rated control supply voltage	Time range	Ordering code	L.P. (₹)
CT-MFS.21S	24-240 V AC/DC	10 (0.05 s- 300 h)	1SVR730010R0200	Upon request

CT-ERS.22: ON-delay (accumulative), 2 c/o

Type	Rated control supply voltage	Time range	Ordering code	L.P. (₹)
CT-ERS.22S	24-48 V DC, 24-240 V AC	10 (0.05 s- 300 h)	1SVR730100R3300	Upon request

Electronic products and relays

Measuring and monitoring relays



Single and three phase monitoring relays for phase failure detection

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
With neutral monitoring			
CM-PBE	3x380-440 V AC, 220-240 V AC	1SVR550881R9400	5,511
Without neutral monitoring			
CM-PBE	3x380-440 V AC	1SVR550882R9500	5,511

Single and three phase monitoring relays for over / undervoltage and phase failure detection

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
With neutral monitoring			
CM-PVE	3x320-460 V AC, 185-265 V AC	1SVR550870R9400 ■	5,511
Without neutral monitoring			
CM-PVE	3x320-460 V AC	1SVR550871R9500	5,511

Three phase monitoring relays for phase sequence monitoring and phase failure detection

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
CM-PFS.S	3x200-500 V AC	1SVR730824R9300	4,070

Three phase monitoring relays for over and undervoltage with adjustable threshold values

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
CM-PVS.31P	3x160-300 V AC	1SVR740794R1300	18,612
CM-PVS.31S		1SVR730794R1300	15,356
CM-PVS.41P	3x300-500 V AC	1SVR740794R3300	16,566
CM-PVS.41S		1SVR730794R3300	16,566



Three phase monitoring relays for phase unbalance

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
CM-PAS.31P	3x160-300 V AC	1SVR740774R1300	17,699
CM-PAS.31S		1SVR730774R1300	15,356
CM-PAS.41P	3x300-500 V AC	1SVR740774R3300	17,699
CM-PAS.41S		1SVR730774R3300	15,356

Multifunctional three phase monitoring relays (phase failure detection, phase sequence monitoring, overvoltage, undervoltage, phase unbalance)

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
With interrupted neutral monitoring			
CM-MPS.11P	3x90-170 V AC	1SVR740885R1300	18,425
CM-MPS.11S		1SVR730885R1300	17,182
CM-MPS.21P	3x180-280 V AC	1SVR740885R3300	17,798
CM-MPS.21S		1SVR730885R3300	16,896
Without interrupted neutral monitoring			
CM-MPS.41S	3x300-500 V AC	1SVR730884R3300 ■	7,480

Electronic products and relays

Measuring and monitoring relays

Three phase monitoring relays



Multifunctional three phase monitoring relays, automatic phase sequence correction and separate monitoring of over and undervoltage (window monitoring) configurable

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
With interrupted neutral monitoring			
CM-MPS.23P	3x180-280 V AC	1SVR740885R4300	23,430
CM-MPS.23S		1SVR730885R4300	20,625
Without interrupted neutral monitoring			
CM-MPS.43P	3x300-500 V AC	1SVR740884R4300	22,594
CM-MPS.43S		1SVR730884R4300	18,711

Multifunctional three phase monitoring relays, automatic phase sequence correction and separate monitoring of over and undervoltage (window monitoring) configurable

Type	Rated control supply voltage = measuring voltage	Ordering code	L.P.(₹)
CM-MPN.52P	3x350-580 V AC	1SVR760487R8300	25,718
CM-MPN.52S		1SVR750487R8300	21,846
CM-MPN.62P	3x450-720 V AC	1SVR760488R8300	25,718
CM-MPN.62S		1SVR750488R8300	22,594
CM-MPN.72P	3x530-820 V AC	1SVR760489R8300	25,718
CM-MPN.72S		1SVR750489R8300 ■	22,594

Insulation monitors for unearthed supply systems



Type	Nominal voltage Un of the distribution system to be monitored	Rated control supply voltage	Ordering code	L.P.(₹)
CM-IWS.1P	0-250 V AC / 0-300 V DC	24-240 V AC/DC	1SVR740660R0100	29,480
CM-IWS.1S			1SVR730660R0100 ■	28,380
CM-IWS.2P	0-400 V AC	24-240 V AC/DC	1SVR740670R0200	26,125
CM-IWS.2S			1SVR730670R0200 ■	23,320
CM-IWN.1P	0-400 V AC / 0-600 V DC	24-240 V AC/DC	1SVR760660R0200	74,206
CM-IWN.1S			1SVR750660R0200	54,010
Coupling unit				
CM-IVN.S	Passive device, no control supply voltage needed	0-690 V AC / 0-1000 V DC	1SVR750669R9400 ■	28,248
CM-IVN.P			1SVR760669R9400	34,386

Thermistor motor protection relays



Type	Rated control supply voltage	Ordering code	L.P.(₹)
CM-MSE	24 V AC	1SVR550805R9300	6,138
	110-130 V AC	1SVR550800R9300 ■	4,664
	220-240 V AC	1SVR550801R9300 ■	6,138
CM-MSS.12S	24 V AC/DC	1SVR730700R0100	7,810
CM-MSS.12P	24 V AC/DC	1SVR740700R0100	8,239
CM-MSS.13S	110-130 V AC/220-240 V AC	1SVR730700R2100	7,359
CM-MSS.13P	110-130 V AC/220-240 V AC	1SVR740700R2100	8,239
CM-MSS.22S	24 V AC/DC	1SVR730700R0200	7,854
CM-MSS.22P	24 V AC/DC	1SVR740700R0200	9,020
CM-MSS.23S	110-130 V AC/220-240 V AC	1SVR730700R2200	7,854
CM-MSS.23P	110-130 V AC/220-240 V AC	1SVR740700R2200	9,020

■ Stock items

Electronic products and relays

Pluggable interface relays



CR-M

Ordering details - CR-M range without LED

Version	Outputs	Type	Ordering code	L.P.(₹)
12 V DC	2 c/o (SPDT)	CR-M012DC2	1SVR405611R4000	651
24 V DC		CR-M024DC2	1SVR405611R1000 ■	651
48 V DC		CR-M048DC2	1SVR405611R6000	651
60 V DC		CR-M060DC2	1SVR405611R4200	651
110 V DC		CR-M110DC2	1SVR405611R8000 ■	725
125 V DC		CR-M125DC2	1SVR405611R8200	714
220 V DC		CR-M220DC2	1SVR405611R9000	683
24 V AC		CR-M024AC2	1SVR405611R0000	683
48 V AC		CR-M048AC2	1SVR405611R5000	683
110 V AC		CR-M110AC2	1SVR405611R7000	683
120 V AC	4 c/o (SPDT)	CR-M120AC2	1SVR405611R2000	683
230 V AC		CR-M230AC2	1SVR405611R3000 ■	756
12 V DC		CR-M012DC4	1SVR405613R4000	651
24 V DC		CR-M024DC4	1SVR405613R1000 ■	651
48 V DC		CR-M048DC4	1SVR405613R6000	693
60 V DC		CR-M060DC4	1SVR405613R4200	662
110 V DC		CR-M110DC4	1SVR405613R8000 ■	756
125 V DC		CR-M125DC4	1SVR405613R8200 ■	767
220 V DC		CR-M220DC4	1SVR405613R9000 ■	798
24 V AC		CR-M024AC4	1SVR405613R0000	767
48 V AC		CR-M048AC4	1SVR405613R5000	714
110 V AC		CR-M110AC4	1SVR405613R7000 ■	767
120 V AC		CR-M120AC4	1SVR405613R2000	767
230 V AC		CR-M230AC4	1SVR405613R3000 ■	798

Ordering details - CR-M range with LED

Version	Outputs	Type	Ordering code	L.P.(₹)
12 V DC	2 c/o (SPDT)	CR-M012DC2L	1SVR405611R4100	651
24 V DC		CR-M024DC2L	1SVR405611R1100 ■	672
48 V DC		CR-M048DC2L	1SVR405611R6100	683
60 V DC		CR-M060DC2L	1SVR405611R4300	683
110 V DC		CR-M110DC2L	1SVR405611R8100	767
125 V DC		CR-M125DC2L	1SVR405611R8300	767
220 V DC		CR-M220DC2L	1SVR405611R9100	788
24 V AC		CR-M024AC2L	1SVR405611R0100	756
48 V AC		CR-M048AC2L	1SVR405611R5100	693
110 V AC		CR-M110AC2L	1SVR405611R7100	756
120 V AC	4 c/o (SPDT)	CR-M120AC2L	1SVR405611R2100	767
230 V AC		CR-M230AC2L	1SVR405611R3100	798
12 V DC		CR-M012DC4L	1SVR405613R4100	809
24 V DC		CR-M024DC4L	1SVR405613R1100 ■	809
48 V DC		CR-M048DC4L	1SVR405613R6100	809
60 V DC		CR-M060DC4L	1SVR405613R4300	714
110 V DC		CR-M110DC4L	1SVR405613R8100 ■	903
125 V DC		CR-M125DC4L	1SVR405613R8300	903
220 V DC		CR-M220DC4L	1SVR405613R9100 ■	945
24 V AC		CR-M024AC4L	1SVR405613R0100	903
48 V AC		CR-M048AC4L	1SVR405613R5100	903
110 V AC		CR-M110AC4L	1SVR405613R7100	903
120 V AC		CR-M120AC4L	1SVR405613R2100	819
230 V AC		CR-M230AC4L	1SVR405613R3100 ■	945



CR-M



CR-M4SS

Ordering details - CR-M range accessories

Version	Type	Ordering code	L.P.(₹)
Standard socket for 2 c/o	CR-M2SS	1SVR405651R1000 ■	410
Standard socket for 2/4 c/o	CR-M4SS	1SVR405651R3000 ■	441
Plastic holder	CR-MH	1SVR405659R1000 ■	53
Metal holder	CR-MH1	1SVR405659R1100 ■	42

■ Stock items

Electronic products and relays

Pluggable interface relays



Ordering details - CR-MX range with LED

Version	Outputs	Type	Ordering code	L.P.(₹)
12 V DC	2 c/o (SPDT), 250 V, 7 A	CR-MX012DC2L	1SVR405631R4100	273
24 V DC		CR-MX024DC2L	1SVR405631R1100 ■	294
48 V DC		CR-MX048DC2L	1SVR405631R6100	315
110 V DC		CR-MX110DC2L	1SVR405631R8100 ■	294
220 V DC		CR-MX220DC2L	1SVR405631R9100	536
24 V AC		CR-MX024AC2L	1SVR405631R0100 ■	273
110 V AC		CR-MX110AC2L	1SVR405631R7100	273
230 V AC		CR-MX230AC2L	1SVR405631R3100 ■	315
12 V DC	4 c/o (SPDT), 250 V, 5 A	CR-MX012DC4L	1SVR405633R4100	315
24 V DC		CR-MX024DC4L	1SVR405633R1100 ■	336
48 V DC		CR-MX048DC4L	1SVR405633R6100	347
110 V DC		CR-MX110DC4L	1SVR405633R8100 ■	347
220 V DC		CR-MX220DC4L	1SVR405633R9100	578
24 V AC		CR-MX024AC4L	1SVR405633R0100 ■	347
110 V AC		CR-MX110AC4L	1SVR405633R7100 ■	368
230 V AC		CR-MX230AC4L	1SVR405633R3100 ■	368

Ordering details - CR-MX range with Integrated LED & Test Button

Version	Outputs	Type	Ordering code	L.P.(₹)
12 V DC	2 c/o (SPDT), 250 V, 7 A	CR-MX012DC2LT	1SVR405641R4100	331
24 V DC		CR-MX024DC2LT	1SVR405641R1100 ■	357
48 V DC		CR-MX048DC2LT	1SVR405641R6100	368
110 V DC		CR-MX110DC2LT	1SVR405641R8100 ■	368
220 V DC		CR-MX220DC2LT	1SVR405641R9100	588
24 V AC		CR-MX024AC2LT	1SVR405641R0100 ■	368
110 V AC		CR-MX110AC2LT	1SVR405641R7100	378
230 V AC		CR-MX230AC2LT	1SVR405641R3100 ■	410
12 V DC	4 c/o (SPDT), 250 V, 5 A	CR-MX012DC4LT	1SVR405643R4100	378
24 V DC		CR-MX024DC4LT	1SVR405643R1100 ■	399
48 V DC		CR-MX048DC4LT	1SVR405643R6100	410
110 V DC		CR-MX110DC4LT	1SVR405643R8100 ■	420
220 V DC		CR-MX220DC4LT	1SVR405643R9100	662
24 V AC		CR-MX024AC4LT	1SVR405643R0100 ■	420
110 V AC		CR-MX110AC4LT	1SVR405643R7100 ■	441
230 V AC		CR-MX230AC4LT	1SVR405643R3100 ■	441



Ordering details - Accessories* - CR-MX range

Version	Type	Ordering code	L.P.(₹)
For 2 c/o (SPDT) contacts, black	CR-M2SFB	1SVR405651R1400 ■	147
For 2 or 4 c/o (SPDT) contacts, black	CR-M4SFB	1SVR405651R3400 ■	189
Metal holder	CR-MH1	1SVR405659R1100 ■	42



CR-MX with
Base and
Holder

■ Stock items

Electronic products and relays

Power supplies

Overview

Modern power supply units are vital components in most areas of energy management and automation technology. ABB as your global partner in these areas pays the utmost attention to the resulting requirements. Innovation is the key to a substantial enlargement of our power supply product program:

CP-D

The CP-D range of power supply units in MDRC design (modular DIN rail components) fits into all domestic installation and distribution panels.

CP-E

The CP-E range offers enhanced functionality while the number of different types has been considerably reduced. Now all power supply units can be operated at an ambient temperature of up to +70 °C.

CP-T

The CP-T range of three-phase power supply units is ABB's youngest member of the power supply family.

CP-C.1

The CP-C.1 power supplies are ABB's high-performance and most advanced range. With excellent efficiency, high reliability and innovative functionality, it is prepared for the most demanding industrial applications. These power supplies have up to 50% integrated power reserve and operate at an efficiency of up to 94%. They are equipped with overheat protection and active power factor correction. Combined with a broad AC and DC input range and extensive worldwide approvals the CP-C.1 power supplies are the preferred choice for professional DC applications.



CP-E range

Rated I/P voltage	Rated O/P Voltage/Current	Type	Ordering code	L.P. (₹)
100-240 V AC	5 V DC / 3 A	CP-E 5/3.0	1SVR427033R3000	5,030
100-240 V AC	12 V DC / 2.5 A	CP-E 12/2.5	1SVR427032R1000 ■	5,208
115 / 230 V AC auto select	12 V DC / 10 A	CP-E 12/10.0	1SVR427035R1000 ■	9,587
100-240 V AC	24 V DC / 0.75 A	CP-E 24/0.75	1SVR427030R0000	3,854
100-240 V AC	24 V DC / 1.25 A	CP-E 24/1.25	1SVR427031R0000 ■	4,200
100-240 V AC	24 V DC / 2.5 A	CP-E 24/2.5	1SVR427032R0000 ■	4,326
115 / 230 V AC auto select	24 V DC / 5 A	CP-E 24/5.0	1SVR427034R0000 ■	7,812
115 / 230 V AC auto select	24 V DC / 10 A	CP-E 24/10.0	1SVR427035R0000 ■	11,340
115 / 230 V AC	24 V DC / 20 A	CP-E 24/20.0	1SVR427036R0000 ■	20,234
100-240 V AC	48 V DC / 0.625 A	CP-E 48/0.62	1SVR427030R2000	5,366
100-240 V AC	48 V DC / 1.25 A	CP-E 48/1.25	1SVR427031R2000	6,815
115 / 230 V AC auto select	48 V DC / 5 A	CP-E 48/5.0	1SVR427034R2000	13,787
115 / 230 V AC	48 V DC / 10 A	CP-E 48/10.0	1SVR427035R2000 ■	19,656

Note: Refer technical data sheet for DC voltage input range

CP-C.1

Input voltage range	Rated output Voltage/Current	Type	Ordering code	L.P. (₹)
100-240 V AC, 90-300 V DC	24 V DC / 5 A	CP-C.1 24/5.0	1SVR360563R1001	Upon request
100-240 V AC, 90-300 V DC	24 V DC / 10 A	CP-C.1 24/10.0	1SVR360663R1001	
100-240 V AC, 90-300 V DC	24 V DC / 20 A	CP-C.1 24/20.0	1SVR360763R1001	

CP-T range

Rated I/P voltage	Rated O/P Voltage/Current	Type	Ordering code	L.P. (₹)
340-575 V AC/ 480-820 V DC	24 V DC / 5 A	CP-T 24/5.0	1SVR427054R0000	13,545
340-575 V AC/ 480-820 V DC	24 V DC / 10 A	CP-T 24/10.0	1SVR427055R0000	17,241
340-575 V AC/ 480-820 V DC	24 V DC / 20 A	CP-T 24/20.0	1SVR427056R0000	21,389
340-575 V AC/ 480-820 V DC	24 V DC / 40 A	CP-T 24/40.0	1SVR427057R0000	31,647
340-575 V AC/ 480-820 V DC	48 V DC / 5 A	CP-T 48/5.0	1SVR427054R2000	18,743
340-575 V AC/ 480-820 V DC	48 V DC / 10 A	CP-T 48/10.0	1SVR427055R2000	25,620
340-575 V AC/ 480-820 V DC	48 V DC / 20 A	CP-T 48/20.0	1SVR427056R2000	37,485

Smart temperature monitoring relay **NEW**

Reduced stocks, flexible adjustment
and easy setup: One relay for all applications.

One...



look

back-lit LCD for easy reading and setup



touch



NFC parametrization via smartphone



device

for a wide range of applications



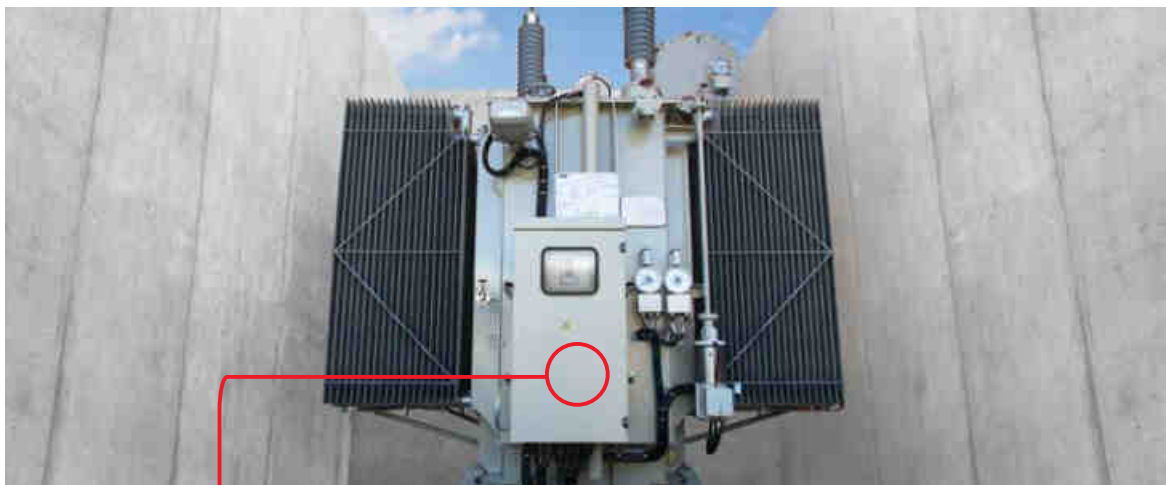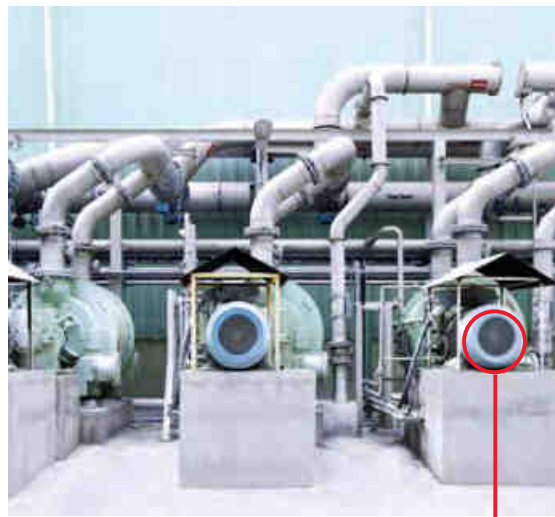

Temperature sensor, e.g. PT100



Smart temperature monitoring relay



ABB EPIC smartphone app

Description	Ordering code	L.P.(₹)
"Temperature monitoring relay CM-TCN.011S, Temp.-range -200..+850°C, width 45mm,digital adjustable, 3 thresholds, over temperature-, under temperature-, window monitoring, A1-A2=24-240V AC / DC, 3 c/o, Screw connection terminals"	1SVR750740R0110	32,000
"Temperature monitoring relay CM-TCN.011S, Temp.-range -200..+850°C, width 45mm, digital adjustable, 3 thresholds, over temperature-, under temperature-, window monitoring, A1-A2=24-240V AC / DC, 3 c/o, Pushing connection terminals"	1SVR760740R0110	33,000

Intelligent motor management system - UMC100.3

Ordering details - Universal Motor Controller UMC100.3



UMC100.3 DC



UMC100.3 UC



UMC100-PAN

Description

Intelligent motor management system for single and three-phase motors with $I_e = 0.24 - 63 \text{ A}$ in one single device. Compact housing with integrated current transformer for cable cross section up to 25 mm^2 (max. \varnothing with Insulation 11 mm). Higher currents with additional external current transformer. Thermal overload protection according to EN/IEC 60947-4-1, selectable trip classes 5E, 10E, 20E, 30E, 40E. Some functions require an additional expansion module.

- **Motor protection functions:**
Over-/underload, over-/undercurrent, over-/undervoltage, rotor blocking, phase failure/imbalance/sequence Earth fault detection integrated or with external sensor CEM11
Hot motor protection with thermistor or temperature measurement
- **Motor control functions:**
Easily configurable motor control functions: direct, reverse, star-delta starter, pole-changing, overload relay, actuator mode, softstarter mode. Additionally free programmable application specific logic with function blocks
- **Service and diagnostic data:**
Operating hours, number of motor starts and overload trips, energy, standstill and operation hours supervision, motor status, faults and warnings, fault history (16 events)
Motor current, phase voltages, thermal load, power factor (cos), active power, apparent power, energy, total harmonic distortion (THD).
- **Integrated I/Os:**
6 digital inputs, 1 PTC input, 4 digital outputs. Maximum number of I/Os with expansion modules:
14 digital inputs, 1 PTC input, 9 digital outputs, 6 analogue inputs, 1 analogue output
- **Communication interfaces** for fieldbuses and ethernet networks, interface for operator panel UMC100-PAN, bus interface for connection of expansion modules
- **Versions** for supply voltage 24 V DC and 110 – 240 V AC/DC and with ATEX approval

Ordering details

Designation	Supply voltage	Type	Ordering code	L.P. (₹)
Universal Motor Controller	24 V DC	UMC100.3 DC	1SAJ530000R0100	Upon request
Universal Motor Controller	110-240 V AC/DC	UMC100.3 UC	1SAJ530000R1100	
Universal Motor Controller, ATEX	24 V DC	UMC100.3 DC EX	1SAJ530000R0200	
Universal Motor Controller, ATEX	110-240 V AC/DC	UMC100.3 UC EX	1SAJ530000R1200	
Universal Motor Controller, DC, ATEX, Conformal Coating	24 V DC	UMC100.3 DC EX	1SAJ530000R0210	
Universal Motor Controller, UC, ATEX, Conformal Coating	110-240 V AC/DC	UMC100.3 DC EX	1SAJ530000R1210	

Operating panel UMC100-PAN

Operator panel for Universal Motor Controller UMC100. Backlit graphical and multilingual fulltext display, LEDs for status. Assembly directly on UMC100 or on the control cabinet door via extension cable and door mounting set.

Functions:

- **Monitoring:** Shows motor status and diagnostics
- **Operate:** Start, stop, fault reset
- **Parametrize:** Setting and changing of motor and fieldbus parameters (password protection possible)
- **Copy settings**
- **USB port** for up/download of parameters and logic

Supports 8 languages: English, French, German, Italian, Spanish, Polish, Portuguese, Russian
Replaces all former UMC100 operator panels

Ordering details

Designation	Type	Ordering code	L.P. (₹)
Operating panel	UMC100-PAN	1SAJ590000R0103	Upon request
0.7 m ext. cable with door mounting set	UMCPAN-CAB.070	1SAJ510003R0002	
1.5 m ext. cable with door mounting set	UMCPAN-CAB.150	1SAJ510004R0002	
3 m ext. cable with door mounting set	UMCPAN-CAB.300	1SAJ510002R0002	

Intelligent motor management system - UMC100.3

Ordering details - Expansion modules



DX111-FBP

2CDC 341 005 F0009

Description

Up to 4 expansion-modules can be connected to one UMC100.3

- 1 digital expansion module DX111 or DX122
- 1 voltage expansion module VI150 or VI155
- 2 analog/temperature expansion modules AI111 possible)

Supply voltage is 24 V DC; the 110-240 V AC/DC version of the UMC100.3 provides the 24 V DC supply for expansion modules



DX122-FBP

2CDC 341 004 F0009

DX111

I/O-expansion module with 8 digital inputs 24 V DC, 4 relay outputs, 1 analog output 0/4-20 mA or 0...10 V

DX122

I/O-expansion module with 8 digital inputs 110 / 230 V AC, 4 relay outputs, 1 analog output 0/4-0 mA or 0-10 V

VI15x

Voltage modules for the determination of phase voltages, power factor ($\cos \phi$), apparent power, energy, total harmonic distortion (THD).

For use in grounded networks (VI150) or in all networks (VI155), 150-690 V AC

AI111

Analog / temperature expansion module, 3 inputs PT100, PT1000, KTY83, KTY84, NTC, 0-10 V, 0/4-20 mA

1 or 2 modules AI111 can be connected to an UMC100.3.



VI150-FBP

2CDC 345 001 S0011



VI155-FBP

2CDC 345 002 S0011

Ordering details

Designation	Type	Ordering code	L.P.(₹)
I/O module for UMC100, 24 V DC digital input	DX111	1SAJ611000R0101	Upon request
I/O module for UMC100, 110 – 230 V AC digital input	DX122	1SAJ622000R0101	
3 phase voltage module for grounded networks	VI150	1SAJ650000R0100	
3 phase voltage module for all networks	VI155	1SAJ655000R0100	
Analog/temperature module 3 analogue inputs	AI111	1SAJ613000R0101	
Connection cable UMC100 - I/O module, length 0.30 m	UMCIO-CAB.030	1SAJ691000R0001	
Connection cable IO-module - IO-module, length 0,30 m	IOIO-CAB.030	1SAJ692000R0001	
Terminal set for UMC100.3 DC (spare parts)	UMCTB	1SAJ929160R0001	
Terminal set for UMC100.3 UC (spare parts)	UMCTB	1SAJ929160R0002	

Fieldbus interfaces

Ordering details



PDP32.0



MRP31.0



DNP31.0



PDR31.0

Description

Fieldbus communication interfaces enable the UMC100.3 to communicate via fieldbus. The interfaces can be used in two ways:

- Mounted directly on an UMC100.3 – the interface is supplied from the UMC100.3 and no additional accessory is required
- Mounted separately on a SMK3.0 adapter in the cable chamber of an MCC, the interface plugged on SMK3.0 requires a 24 V DC supply. Ready-made cables for applications in withdrawable systems are available, as well as terminal blocks for other cables:
CDP18.150: Cable for use inside the drawer CDP24.150: Cable from SMK3.0 to drawer outside

PDP32.0

- Communication interface for PROFIBUS DP; supports the protocols PROFIBUS DP/V0 and V1
- PNO-certified PROFIBUS slave
- Data transfer rate up to 12 Mbit/s
- Diagnostic LEDs
- Fieldbus connection via nine-pole Sub-D connector or terminal blocks
- GSD download from UMC100.3 webpage

MRP31.0

- Communication interface for Modbus RTU
- Data transfer rate up to 57.6 kbit/s
- Diagnostic LEDs
- Fieldbus connection via terminal blocks

DNP31.0

- Communication interface for DeviceNet
- ODVA-certified DeviceNet slave
- Data transfer rate up to 500 kbit/s
- Diagnostic LEDs
- Fieldbus connection via terminal blocks
- EDS download from UMC100.3 webpage

PDR31.0

- External active fieldbus termination for Profibus DP; the PDR31.0 needs to be mounted on a SMK3.0 adapter and supplied by 24 V DC

Description	Type	Order code	L.P. (₹)
Profibus DP communication interface	PDP32.0	1SAJ242000R0001	Upon request
Modbus RTU communication interface; terminal block for fieldbus connection included	MRP31.0	1SAJ251000R0001	
DeviceNet communication interface; terminal block for fieldbus connection included	DNP31.0	1SAJ231000R0001	
Profibus DP active bus termination	PDR31.0	1SAJ243000R0001	

Ethernet interfaces

Ordering details



MTQ22-FBP.0



PNQ22-FBP.0



EIU32.0

Description

Ethernet communication interfaces enable the UMC100.3 to communicate via an Ethernet network. There are two types of interfaces:

Interfaces for the connection of one to four Universal Motor Controllers UMC100.3:

- MTQ22-FBP.0 for Modbus TCP
- PNQ22-FBP.0 for Profinet IO

Interface for a single universal motor controller UMC100.3:

- EIU32.0 for EtherNet/IP™

MTQ22-FBP.0

- Protocol Modbus TCP
- For one to four UMC100.3
- Master supervision with timeout control for up to four masters
- Micro USB-port for configuration via PC (configuration software downloaded from UMC100.3 webpage)
- Integrated Ethernet switch
- Supports all network topologies
- Ring topology with redundancy (MRP protocol)
- Easy to use in withdrawable applications
- No special Ethernet connectors required in MCCs
- 24 V DC supply voltage
- DIN-rail mounting

PNQ22-FBP.0

- Protocol Profinet IO
- PNO-certified
- For one to four UMC100.3 devices
- Integrated Ethernet switch
- Supports all network topologies
- Ring topology with redundancy (MRP protocol)
- Easy to use in withdrawable applications
- No special Ethernet connectors required in MCCs
- Fully integrated into ABB 800xA
- Time-stamped events with ABB 800xA
- 24 V DC supply voltage
- DIN-rail mounting
- GSDML downloaded from UMC100.3 webpage

EIU32.0

- Protocol EtherNet/IP™
- ODVA-certified
- For one motor controller UMC100.3
- Mounting directly on an UMC100.3 (supplied by UMC100.3) or remotely on a SMK3.0 adapter (24 V DC supply required)
- Integrated Ethernet switch
- Supports all network topologies
- DLR (Device Level Ring) function for redundancy
- Easy to use in withdrawable applications
- No special Ethernet connectors required in MCCs
- EDS download from UMC100.3 webpage

Description	Type	Order code	L.P. (₹)
Ethernet Modbus TCP interface	MTQ22-FBP.0	1SAJ260000R0100	Upon request
Ethernet Profinet IO interface	PNQ22-FBP.0	1SAJ261000R0100	
EtherNet/IP™ interface	EIU32.0	1SAJ262000R0100	

Adapter and accessories

Ordering details



SMK3.0



CDP18.150




PDP32.0 on SMK3.0



EIU32.0 on SMK3.0

Adapter and ready-made cables

Adapter SMK3.0 for external mounting of a fieldbus or EtherNet/IP™ interface EIU32.0 outside a drawer. SMK3.0 can be mounted on a DIN-rail or fixed by screws. 24 V DC supply is required. Ready-made cables for inside and outside the drawer, including a terminal block on one side and open end on the other. Terminal blocks are also separately available for making own cables.

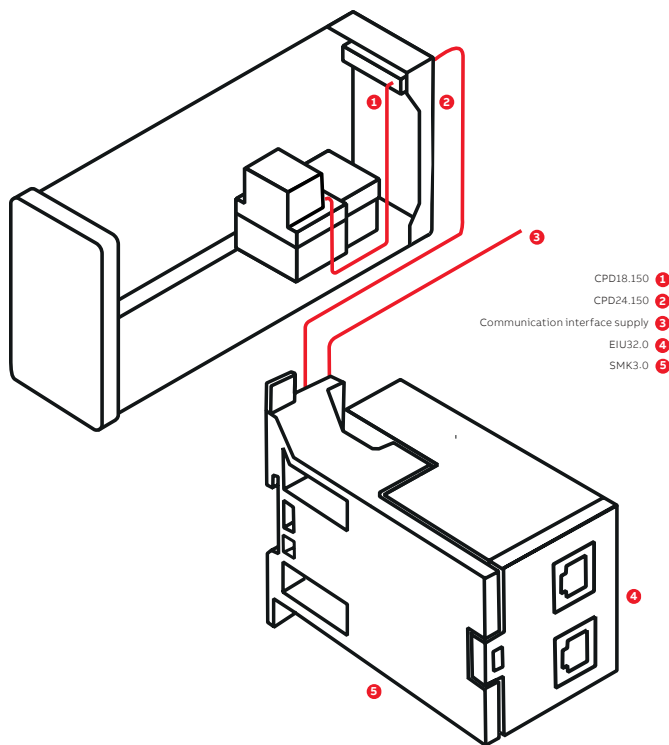

Separate wiring of the EtherNet/IP™ communication interface EIU32.0

Description	Type	Order code	L.P. (₹)
Adapter for separate mounting of a communication interface; terminal block for 24 V DC supply included	SMK3.0	1SAJ929600R0001	Upon request
Cable for use inside drawer, length 1.5 m	CDP18.150	1SAJ929180R0015	
Cable from SMK3.0 to drawer's outside, length 1.5 m	CDP24.150	1SAJ929240R0015	
Terminal block 2-pole for SMK3.0 supply (spare parts)	SMK3-X2.10	1SAJ929610R0001	
Terminal block 5-pole for SMK3.0 comm. (spare parts)	SMK3-X1.10	1SAJ929620R0001	
Cable for inside and outside drawer, length 1.5 m	CDP18.150	1SAJ929180R0015	
Cable Ethernet interface - UMC100.3, length 1.5 m	CDP23.150	1SAJ929230R0015	
Cable Ethernet interface - UMC100.3, length 3 m	CDP23.300	1SAJ929230R0030	
Cable from SMK3.0 to drawer's outside, length 1.5 m	CDP24.150	1SAJ929240R0015	
Terminal blocks for MTQ22/PNQ22 X1...X4	ETHTB-FBP.4	1SAJ929200R0001	
Terminal blocks for MTQ22/PNQ22 X1...X4	ETHTB-FBP.50	1SAJ929200R0002	

Earth fault monitors, current transformers

Ordering details



CEM11-FBP.xxx

2CDC34501F0008

Earth fault monitors CEM11-FBP.xxx for use with the Universal Motor Controller UMC100.3

The CEM11-FBP.xxx device monitors if the sum of the currents flowing through it is zero (factorial addition). If the sum is zero, no residual current is present. If the residual current is above an adjusted threshold value, the output signal of the CEM11-FBP.xxx changes. It can be used in motor feeders to detect leakage currents, as well as ground faults, caused for example by insulation breakdowns.

- CEM11-FBP.xxx is connected to a digital input of the UMC100.3
- Earth fault current threshold can be set in eight steps with a screwdriver
- Test position for easy control of the wiring

CEM11-FBP.xxx is delivered with adapters for DIN-rail or wall mounting.
CEM-11.FBP.120 is for wall-mounting only.



CT4L185R/4, CT4L310R/4

2CDC34001S0012

Earth fault currents [mA]	Through-hole diameter	Type	Order code	L.P. (₹)
80 ¹⁾ , 300, 550, 750, 1000, 1200, 1500, 1700	20 mm	CEM11-FBP.20	1SAJ929200R0020	Upon request
100 ¹⁾ , 500, 1000, 1400, 2000, 2400, 3000, 3400	35 mm	CEM11-FBP.35	1SAJ929200R0035	
120 ¹⁾ , 1000, 2000, 2800, 4000, 4800, 6000, 6800	60 mm	CEM11-FBP.60	1SAJ929200R0060	
300 ¹⁾ , 2000, 4000, 5600, 8000, 9600, 12000, 13600	120 mm	CEM11-FBP.120	1SAJ929200R0120	

¹⁾ Lower values have higher inaccuracy



CT5L500R/4, CT5L850R/4

2CDC34002S0012

Current transformers for use with the Universal Motor Controller UMC100.3

Linear type three-phase transformers, for use with the UMC100.3 and nominal motor currents >63 A. Terminal blocks for conductors Cu 2.5 mm² for wiring on the UMC100.3 side.

Description	Recommended current range	Type	Order code	L.P. (₹)
Current transformer	60...185 A AC	CT4L185R/4	1SAJ929500R0185	Upon request
Current transformer	180...310 A AC	CT4L310R/4	1SAJ929500R0310	
Current transformer	300...500 A AC	CT5L500R/4	1SAJ929501R0500	
Current transformer	500...850 A AC	CT5L850R/4	1SAJ929501R0850	

UMC100-FBP.0 and FBP system accessories are being phased out. Please contact your local ABB contact for spare parts or retrofit solutions.

Arc flash protection and mitigation solutions


Passive, active and preventive

Most short circuit faults in LV and MV switchgears are accompanied by an electric arc. An arc fault always leads to considerable damage to equipment and personnel unless it is distinguished very fast. The fault should be disconnected as fast as possible and in less than 0.1 s to avoid serious damages and give involved person a fair chance to survive the accident without severe damages. This is a demand found in the electrical safety rules in all CE countries, ref. IEC364-4-42.

The Arc Guard System TVOC-2 is an aid to quickly detect an arc fault and trip the incoming circuit-breaker. The main advantage with the Arc Guard System is that it can trip instantaneously, i.e. override other tripping functions.



LV distribution

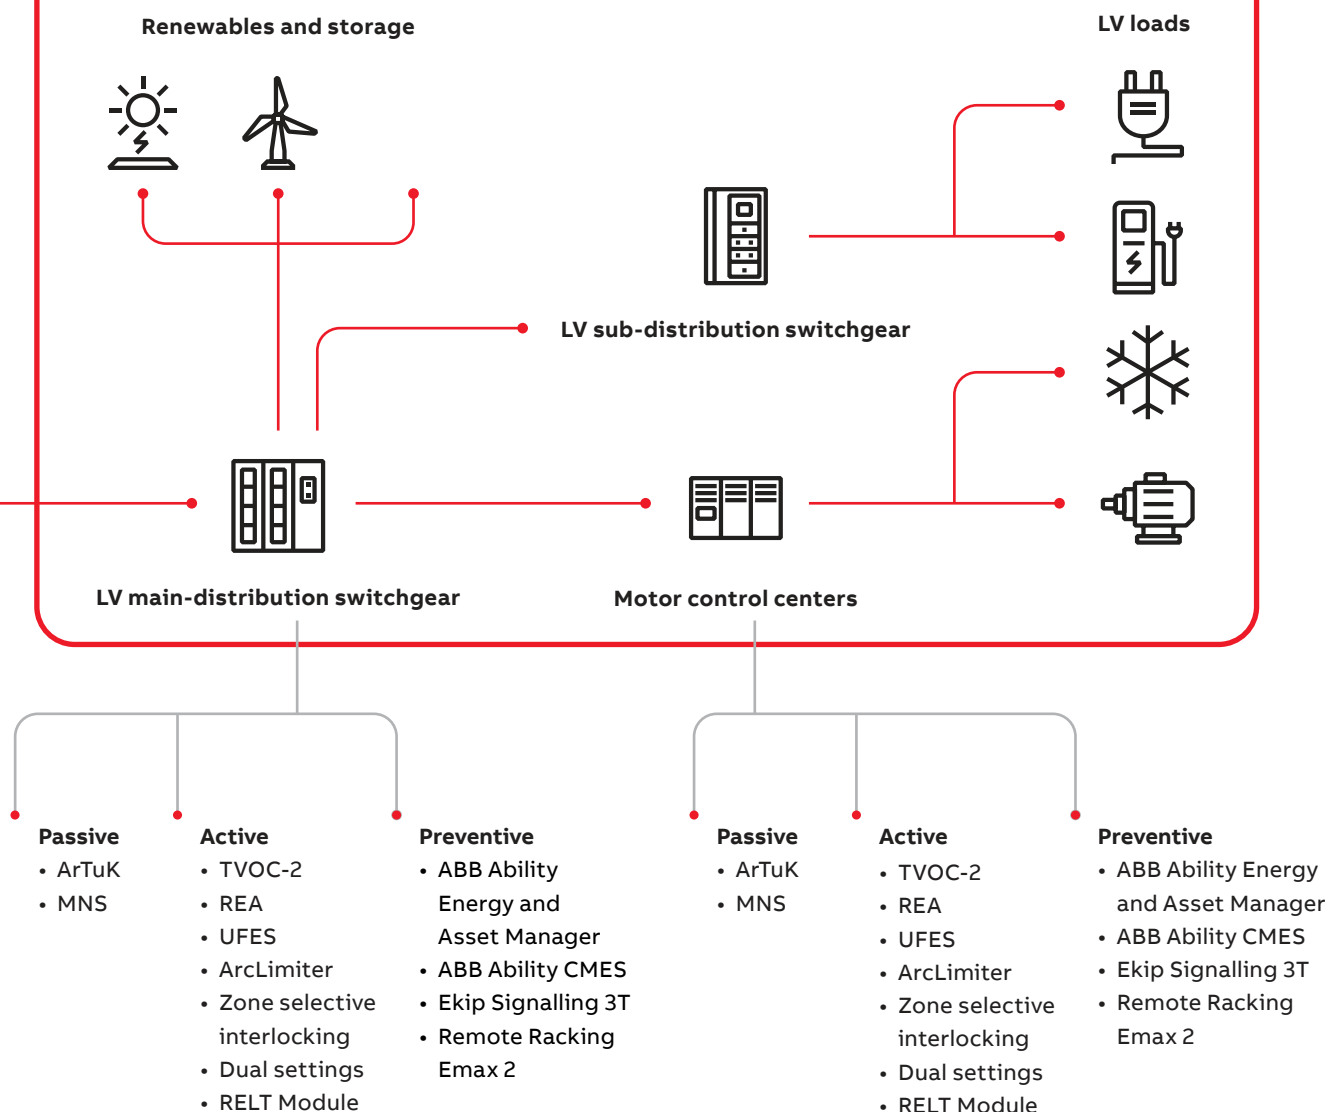

Arc Guard System TVOC-2



Arc Monitor with COM Module

1SFCI70011V0001



Arc Monitor with HMI

1SFCI70014V0001



Extension unit

1SFCI70012F0001



COM Module

1SFCI70009V0001



HMI

1SFCI70012V0001



Detector cable

1SFCI70011F0001



CSU-2LV

1SFCI70008V0001

Ordering details				
Description	Rated supply voltage	Type	Ordering code	LP.(₹)
Arc Monitor including one HMI and door mounting accessories	24...48V DC	TVOC-2-48	1SFA664001R1002	Upon request
	100...240V AC/ 100...250V DC	TVOC-2-240	1SFA664001R1001	
Arc Monitor including one COM Module and door mounting accessories	24...48V DC	TVOC-2-48-C	1SFA664001R1004	
	100...240V AC/ 100...250V DC	TVOC-2-240-C	1SFA664001R1003	

Accessories			
Extension-10 optical inputs	TVOC-2-E1	1SFA664002R1001	Upon request
Extension-10 optical inputs for cable TVOC-2-DP60 only	TVOC-2-E3	1SFA664002R3001	
HMI (Human machine interface)	TVOC-2-H1	1SFA664002R1005	
COM Module-with communication interface (Modbus RTU) and door mounting	TVOC-2-COM	1SFA664002R4001	

Detector				
Cable length	1 m	TVOC-2-DP1	1SFA664003R1010	Upon request
Cable length	2 m	TVOC-2-DP2	1SFA664003R1020	
Cable length	4 m	TVOC-2-DP4	1SFA664003R1040	
Cable length	6 m	TVOC-2-DP6	1SFA664003R1060	
Cable length	8 m	TVOC-2-DP8	1SFA664003R1080	
Cable length	10 m	TVOC-2-DP10	1SFA664003R1100	
Cable length	15 m	TVOC-2-DP15	1SFA664003R1150	
Cable length	20 m	TVOC-2-DP20	1SFA664003R1200	
Cable length	25 m	TVOC-2-DP25	1SFA664003R1250	
Cable length	30 m	TVOC-2-DP30	1SFA664003R1300	
Cable length (1)	60 m	TVOC-2-DP60	1SFA664003R3600	

Current sensing unit

NEW

Description	Type	Order code	Weight (1 pce) kg
Low voltage current sensing unit	CSU-2LV	1SFA664002R5001	0.420
Medium voltage current sensing unit	CSU-2MV	1SFA664002R8001	0.420

Diameter mm	Cable length	Type	Order code	Weight (1 pce) kg
-------------	--------------	------	------------	-------------------

Rogowski coil current sensors for low voltage applications

120	5	RC120-05	1SFA664005R1205	0.180
	10	RC120-10	1SFA664005R1210	0.180
	15	RC120-15	1SFA664005R1215	0.570
	30	RC120-30	1SFA664005R1230	1.030
200	5	RC200-05	1SFA664005R2005	0.210
	10	RC200-10	1SFA664005R2010	0.210
	15	RC200-15	1SFA664005R2015	0.600
	30	RC200-30	1SFA664005R2030	1.050

Note: For medium voltage application, use KECA and KEVCD current sensors types.

Please consult <https://new.abb.com/medium-voltage/apparatus/instrument-transformers-and-sensors-id/products/sensors-new>

Production-friendly safety systems

from ABB Jokab Safety

Quick-Guard fencing system
to prevent unauthorised access

**Contactors and electronic
compacts starters**
to control power and motors

**Inca emergency stop
button**
for compact panel
mounting


MKey9 key switch
for safe locking of hatches and doors

Safeball control device
for an ergonomic and
safe two-hand control

Operators and signalling devices
for control and indication

Eden sensor
for reliable non-contact monitoring of
doors and hatches

Mats, rails and bumpers
to detect the presence
of people

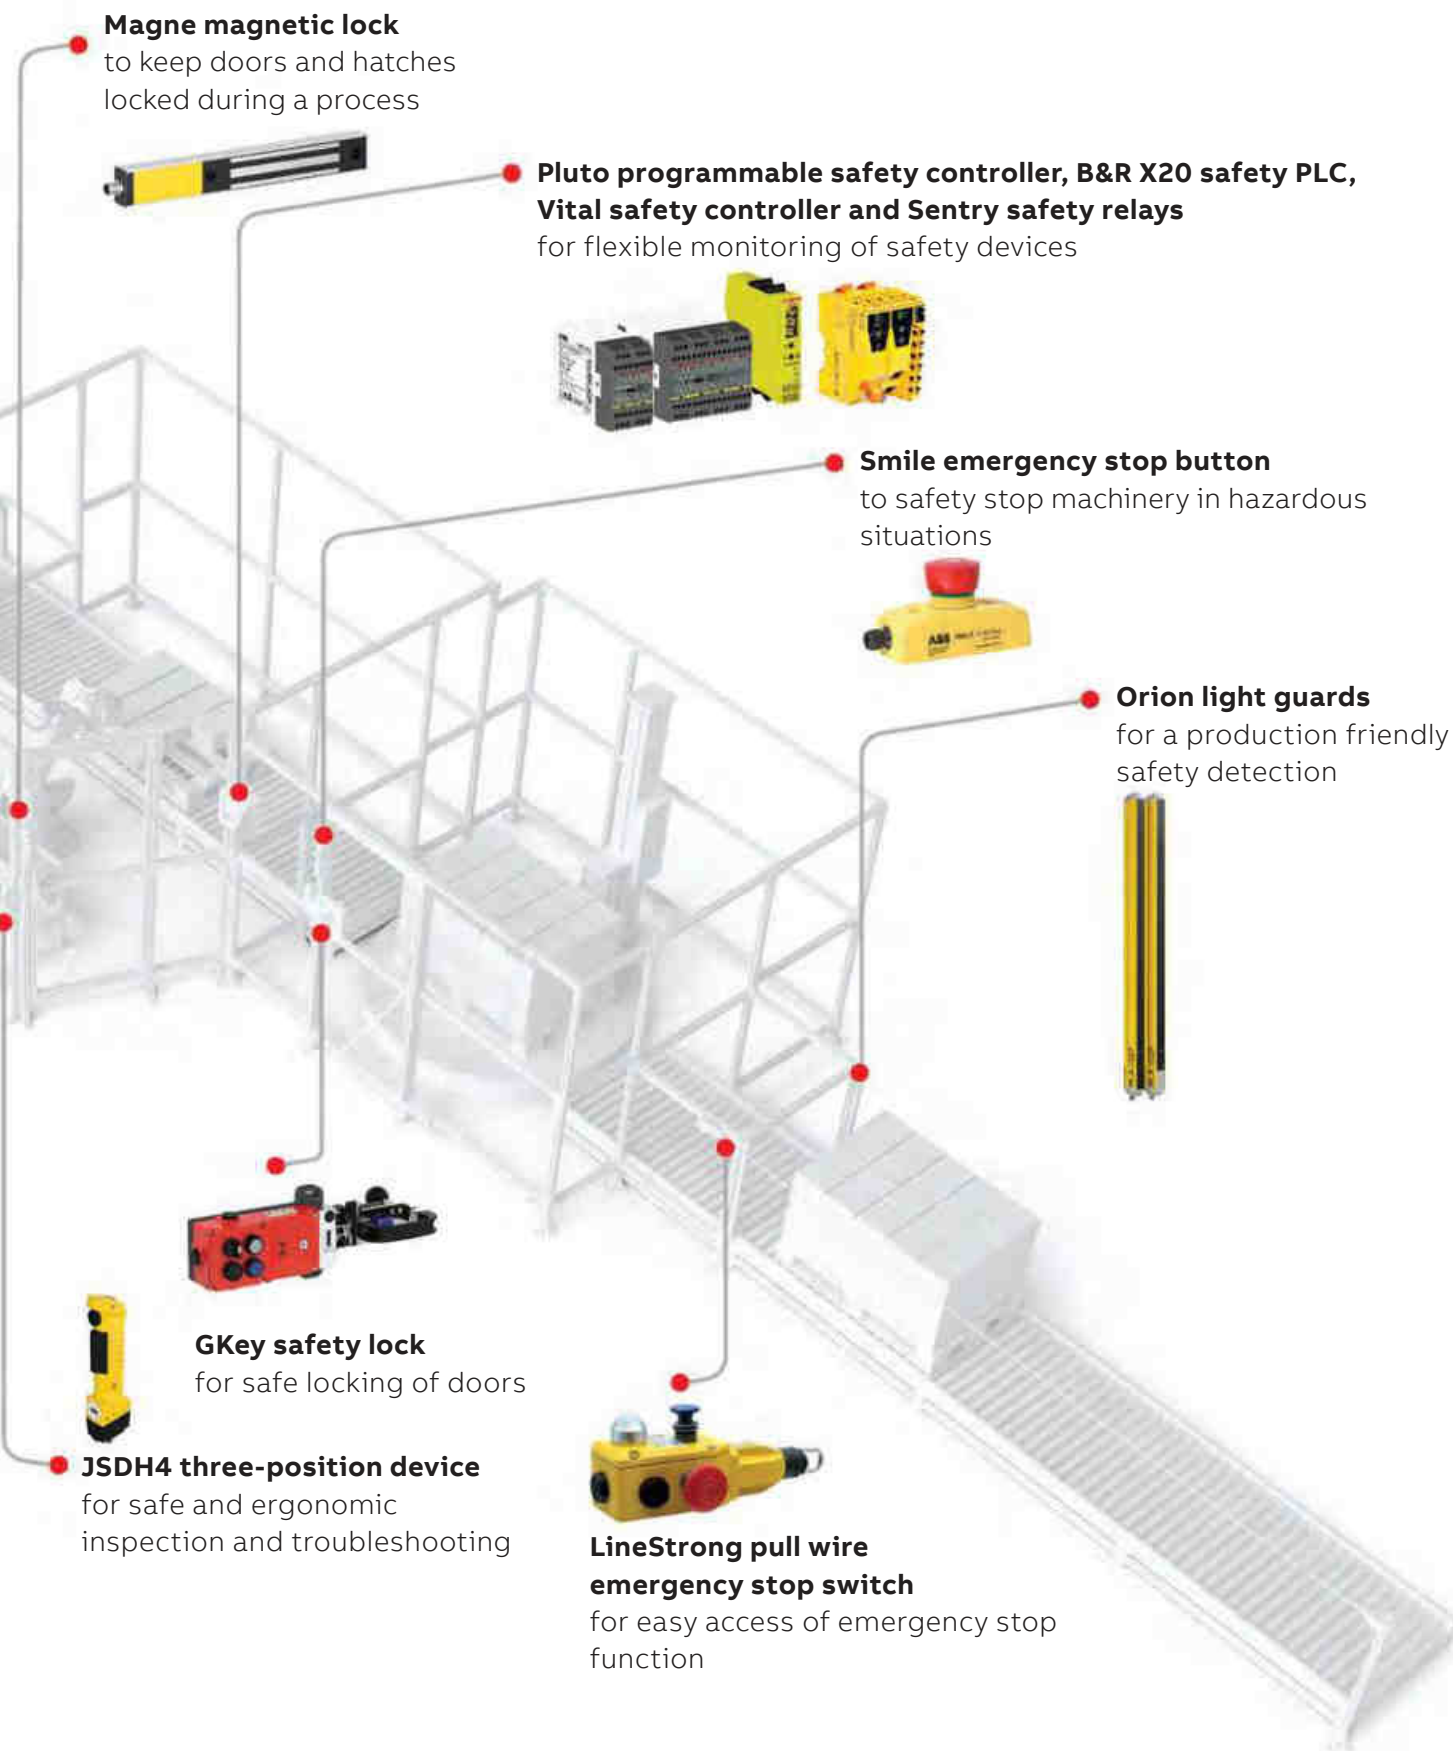

Magne magnetic lock
to keep doors and hatches
locked during a process

**Pluto programmable safety controller, B&R X20 safety PLC,
Vital safety controller and Sentry safety relays**
for flexible monitoring of safety devices

Smile emergency stop button
to safety stop machinery in hazardous
situations

Orion light guards
for a production friendly
safety detection

GKey safety lock
for safe locking of doors

JSDH4 three-position device
for safe and ergonomic
inspection and troubleshooting

**LineStrong pull wire
emergency stop switch**
for easy access of emergency stop
function



Sentry safety relays

Description	Type	Ordering code	L.P.(₹)
24VDC , Safety/Expansion Relay,3 NO + 1 NC - No Time Delay	SENTRY BSR10	2TLA010040R0000	11,429
24VDC, Safety/Expansion Relay,4 NO - No Time Delay	SENTRY BSR11	2TLA010040R0200	11,429
24VDC, Safety/Expansion Relay,4 NO + 1 NC - No Time Delay	SENTRY BSR23	2TLA010041R0600	9,955
24VDC, Safety Relay with Relay outputs,3 NO + 1 NC - No Time Delay	SENTRY SSR10	2TLA010050R0000	14,036
85-265VAC/120-275VDC,Safety Relay with Relay outputs, 3 NO + 1 NC - No Time Delay	SENTRY SSR10M	2TLA010050R0100	17,754
24VDC,Safety Relay with Relay outputs3 NO + 1 NC - No Time Delay	SENTRY SSR20	2TLA010051R0000	15,411
85-265VAC/120-275VDC, Safety Relay with Relay outputs, 3 NO + 1 NC - No Time Delay	SENTRY SSR20M	2TLA010051R0100	19,690
24VDC, Safety Relay with Relay outputs,2 NO + 2 NO (delayed) - OFF-Delay - 0.5 second.	SENTRY SSR32	2TLA010052R0400	22,429
24VDC, Safety Relay with Relay outputs,2 NO + 2 NO (delayed) - OFF-Delay - 1.5 seconds.	SENTRY SSR42	2TLA010053R0400	22,429
24VDC, safety relay/safety timer with delayable relay outputs, 3 NO + 1 NC - Multifunction - 0 ... 999 seconds.	SENTRY TSR10	2TLA010060R0000	18,018
24VDC, safety expansion timer with delayed relay outputs, 3 NO + 1 NC - OFF-Delay - 0.5 and 1.5 seconds.	SENTRY TSR20	2TLA010061R0000	18,018
85-265VAC/120-275VDC,3 NO + 1 NC - OFF-Delay - 0.5 and 1.5 seconds	SENTRY SR20M	2TLA010061R0100	17,754
24VDC, universal safety relay/safety timer with delayable relay outputs,3 NO + 1 NC - Multifunction - 0 ... 999 seconds.	SENTRY USR10	2TLA010070R0000	21,395
24VDC, universal safety relay/safety timer with relay outputs, 2 NO + 2 delayable NO,2 NO + 2 NO (delayed) - Multifunction - 0 ... 999 seconds	SENTRY USR22	2TLA010070R0400	29,865
Terminal block for Sentry safety relays. One piece, Contact block	SENTRY S30A	2TLA010099R0000	1,232
Coding kit for terminal blocks for Sentry safety relays. Should be enough for one Sentry relay, Coding kit	SENTRY S30B	2TLA010099R0100	407



Safety controller

Description	Type	Ordering code	L.P.(₹)
Safety module with one single channel input for dynamic sensors. Relay outputs 2NO	Vital 1	2TLA020052R1000	30,785

Programmable safety controller



Description	Type	Ordering code	L.P.(₹)
Pluto AS-i v2 Safety-PLC AS-i bus,Programmable	Pluto Safety PLC	2TLA020070R1100	90,145
Pluto B42 AS-i, Safety-PLC AS-i bus, 42	Pluto Safety PLC	2TLA020070R1400	1,25,395
Pluto B46 v2 Safety-PLC 24+16+4+2	Pluto Safety PLC	2TLA020070R1700	1,19,705
Pluto S46 v2 Safety PLC 24+16+4+2 No BUS	Pluto Safety PLC	2TLA020070R1800	1,01,679
Pluto A20 v2, Safety-PLC	Pluto Safety PLC	2TLA020070R4500	97,779
Pluto B20 v2, Safety-PLC	Pluto Safety PLC	2TLA020070R4600	89,815
Pluto S20 v2, Safety-PLC	Pluto Safety PLC	2TLA020070R4700	71,467
Pluto B22 Safety-PLC	Pluto Safety PLC	2TLA020070R4800	68,162
Pluto D20 Safety-PLC	Pluto Safety PLC	2TLA020070R6400	1,19,705
Pluto D20 Safety PLC, Harsh environment	Pluto Safety PLC	2TLA020070R6401	1,40,982
Pluto D45 Safety-PLC	Pluto Safety PLC	2TLA020070R6600	1,46,045
Pluto D45 Safety PLC, Harsh environment	Pluto Safety PLC	2TLA020070R6601	1,71,765
Pluto O2 Safety PLC output module with Pluto safety bus. Safety output module.	Pluto Safety PLC	2TLA020070R8500	61,622



Gateway for communication

Description	Type	Ordering code	L.P.(₹)
Gateway for 2-way communication between the Pluto bus and Profibus	GATE-P2	2TLA020071R8000	36,170
Gateway for 2-way communication between the Pluto bus and CANopen	GATE-C2	2TLA020071R8100	30,490
Gateway for 2-way communication between the Pluto bus and Devicenet	GATE-D2	2TLA020071R8200	36,170
Gateway for 2-way communication between the Pluto bus and Ethernet. Ethernet protocol EtherNet I/P.	GATE-EIP	2TLA020071R9000	45,430
Gateway for 2-way communication between the Pluto bus and Ethernet. Ethernet protocol EtherCAT.	GATE-EC	2TLA020071R9100	46,030
Gateway for 2-way communication between the Pluto bus and Ethernet. Ethernet protocol SERCOS III.	GATE-S3	2TLA020071R9200	46,030
Gateway for 2-way communication between the Pluto bus and Ethernet. Ethernet protocol PROFINET.	GATE-PN	2TLA020071R9300	46,030
Gateway for 2-way communication between the Pluto bus and Ethernet. Ethernet protocol Modbus TCP.	GATE-MT	2TLA020071R9400	46,030



Safety and process locks

Description	Type	Ordering code	L.P.(₹)
GKey4 RU Safety lock, 4 positions, die-cast, escape release, manual unlock		2TLA050304R0002	81,000
FHS GKey4 Front handle, sliding incl. mounting plate for GKey4		2TLA050310R0032	25,800
RHS GKey Mkey Rear handle, sliding		2TLA050040R0510	2,650
SCS GKey Mkey Spring loaded catch		2TLA050040R0511	2,650




Orion1 Base

Safety light curtains/Grids

Description	Type	Ordering code	L.P.(₹)
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=150mm, Range=0.2-6m, Type 4	Orion1-4-14-015-B	2TLA022300R0000	74,380
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=300mm, Range=0.2-6m, Type 4.	Orion1-4-14-030-B	2TLA022300R0100	1,03,150
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=450mm, Range=0.2-6m, Type 4.	Orion1-4-14-045-B	2TLA022300R0200	1,32,810
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=600mm, Range=0.2-6m, Type 4.	Orion1-4-14-060-B	2TLA022300R0300	1,61,020
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=750mm, Range=0.2-6m, Type 4.	Orion1-4-14-075-B	2TLA022300R0400	1,87,620
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=900mm, Range=0.2-6m, Type 4.	Orion1-4-14-090-B	2TLA022300R0500	2,15,920



Description	Type	Ordering code	L.P.(₹)
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1050mm, Range=0.2-6m, Type 4.	Orion1-4-14-105-B	2TLA022300R0600	2,41,190
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1200mm, Range=0.2-6m, Type 4.	Orion1-4-14-120-B	2TLA022300R0700	2,68,800
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1350mm, Range=0.2-6m, Type 4.	Orion1-4-14-135-B	2TLA022300R0800	2,96,420
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1500mm, Range=0.2-6m, Type 4.	Orion1-4-14-150-B	2TLA022300R0900	3,25,840
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1650mm, Range=0.2-6m, Type 4.	Orion1-4-14-165-B	2TLA022300R1000	3,55,250
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1800mm, Range=0.2-6m, Type 4.	Orion1-4-14-180-B	2TLA022300R1100	3,84,660
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=300mm, Range=0.2-7m, Type 4.	Orion1-4-14-030-E	2TLA022301R0100	1,42,830
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=450mm, Range=0.2-7m, Type 4.	Orion1-4-14-045-E	2TLA022301R0200	1,75,950
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=600mm, Range=0.2-7m, Type 4.	Orion1-4-14-060-E	2TLA022301R0300	2,09,070
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=750mm, Range=0.2-7m, Type 4.	Orion1-4-14-075-E	2TLA022301R0400	2,38,510
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=900mm, Range=0.2-7m, Type 4.	Orion1-4-14-090-E	2TLA022301R0500	2,78,260
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1050mm, Range=0.2-7m, Type 4.	Orion1-4-14-105-E	2TLA022301R0600	2,98,860
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1200mm, Range=0.2-7m, Type 4.	Orion1-4-14-120-E	2TLA022301R0700	3,28,300
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1350mm, Range=0.2-7m, Type 4.	Orion1-4-14-135-E	2TLA022301R0800	3,61,050
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1500mm, Range=0.2-7m, Type 4.	Orion1-4-14-150-E	2TLA022301R0900	3,93,810
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1650mm, Range=0.2-7m, Type 4.	Orion1-4-14-165-E	2TLA022301R1000	4,26,560
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=14mm, Protected height=1800mm, Range=0.2-7m, Type 4.	Orion1-4-14-180-E	2TLA022301R1100	4,59,310
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=150mm, Range=0.2-19m, Type 4.	Orion1-4-30-015-B	2TLA022302R0000	67,370
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=300mm, Range=0.2-19m, Type 4.	Orion1-4-30-030-B	2TLA022302R0100	82,480
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=450mm, Range=0.2-19m, Type 4.	Orion1-4-30-045-B	2TLA022302R0200	97,190
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=600mm, Range=0.2-19m, Type 4.	Orion1-4-30-060-B	2TLA022302R0300	1,11,270
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=750mm, Range=0.2-19m, Type 4.	Orion1-4-30-075-B	2TLA022302R0400	1,25,370
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=900mm, Range=0.2-19m, Type 4.	Orion1-4-30-090-B	2TLA022302R0500	1,39,560
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1050mm, Range=0.2-19m, Type 4.	Orion1-4-30-105-B	2TLA022302R0600	1,54,160



Orion2 Base
and Orion
extended

Description	Type	Ordering code	L.P.(₹)
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1200mm, Range=0.2-19m, Type 4.	Orion1-4-30-120-B	2TLA022302R0700	1,70,730
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1350mm, Range=0.2-19m, Type 4.	Orion1-4-30-135-B	2TLA022302R0800	1,85,370
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1500mm, Range=0.2-19m, Type 4.	Orion1-4-30-150-B	2TLA022302R0900	1,99,010
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1650mm, Range=0.2-19m, Type 4.	Orion1-4-30-165-B	2TLA022302R1000	2,12,390
Orion1 Base Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1800mm, Range=0.2-19m, Type 4.	Orion1-4-30-180-B	2TLA022302R1100	2,29,280
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=300mm, Range=0.2-20m, Type 4.	Orion1-4-30-030-E	2TLA022303R0100	1,15,320
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=450mm, Range=0.2-20m, Type 4.	Orion1-4-30-045-E	2TLA022303R0200	1,36,670
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=600mm, Range=0.2-20m, Type 4.	Orion1-4-30-060-E	2TLA022303R0300	1,57,470
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=750mm, Range=0.2-20m, Type 4.	Orion1-4-30-075-E	2TLA022303R0400	1,79,040
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=900mm, Range=0.2-20m, Type 4.	Orion1-4-30-090-E	2TLA022303R0500	1,98,240
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1050mm, Range=0.2-20m, Type 4.	Orion1-4-30-105-E	2TLA022303R0600	2,11,280
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1200mm, Range=0.2-20m, Type 4.	Orion1-4-30-120-E	2TLA022303R0700	2,28,200
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1350mm, Range=0.2-20m, Type 4.	Orion1-4-30-135-E	2TLA022303R0800	2,48,070
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1500mm, Range=0.2-20m, Type 4.	Orion1-4-30-150-E	2TLA022303R0900	2,72,360
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1650mm, Range=0.2-20m, Type 4.	Orion1-4-30-165-E	2TLA022303R1000	2,94,440
Orion1 Extended Light Curtain, Transmitter + Receiver, Resolution=30mm, Protected height=1800mm, Range=0.2-20m, Type 4.	Orion1-4-30-180-E	2TLA022303R1100	3,17,260
Orion2 Base Light Grids, Transmitter + Receiver, 2 beams, Protected height=500mm, Range=0.5-50m, Type 4.	Orion2-4-K2-050-B	2TLA022304R0000	80,310
Orion2 Base Light Grids, Transmitter + Receiver, 2 beams, Protected height=800mm, Range=0.5-50m, Type 4.	Orion2-4-K2-080-B	2TLA022304R0100	94,150
Orion2 Base Light Grids, Transmitter + Receiver, 2 beams, Protected height=900mm, Range=0.5-50m, Type 4.	Orion2-4-K2-090-B	2TLA022304R0200	1,05,970
Orion2 Base Light Grids, Transmitter + Receiver, 4 beams, Protected height=1200mm, Range=0.5-50m, Type 4.	Orion2-4-K4-120-B	2TLA022304R0300	1,17,720
Orion2 Extended Light Grids, Transmitter + Receiver, 2 beams, Protected height=500mm, Range=0.5-50m, Type 4.	Orion2-4-K2-050-E	2TLA022305R0000	92,360
Orion2 Extended Light Grids, Transmitter + Receiver, 2 beams, Protected height=800mm, Range=0.5-50m, Type 4.	Orion2-4-K2-080-E	2TLA022305R0100	1,08,270
Orion2 Extended Light Grids, Transmitter + Receiver, 2 beams, Protected height=900mm, Range=0.5-50m, Type 4.	Orion2-4-K2-090-E	2TLA022305R0200	1,21,870
Orion2 Extended Light Grids, Transmitter + Receiver, 2 beams, Protected height=1200mm, Range=0.5-50m, Type 4.	Orion2-4-K2-120-E	2TLA022305R0300	1,35,380

ABB jokab safety



Orion3 Base
and Orion3
extended

Description	Type	Ordering code	L.P.(₹)
Orion3 Base Light Grids, Active unit, 2 beams, Protected height=500mm, Range=0.5-8m, Type 4.	Orion3-4-K1C-050-B	2TLA022306R0000	52,560
Orion3 Base Light Grids, Active unit, 3 beams, Protected height=800mm, Range=0.5-8m, Type 4.	Orion3-4-K2C-080-B	2TLA022306R0100	69,070
Orion3 Base Light Grids, Active unit, 3 beams, Protected height=800mm, Range=0.5-8m, Type 4.	Orion3-4-K2C-090-B	2TLA022306R0200	75,670
Orion3 Base Light Grids, Active unit, 3 beams, Protected height=800mm, Range=0.5-8m, Type 4.	Orion3-4-K2C-1200-B	2TLA022306R0300	80,500
Orion3 Light Grids, Passive unit, 2 beams, Protected height=500mm.	Orion3-4-M1C-050	2TLA022306R1000	20,310
Orion3 Light Grids, Passive unit, 2 beams, Protected height=800mm.	Orion3-4-M1C-080	2TLA022306R1100	27,930
Orion3 Light Grids, Passive unit, 2 beams, Protected height=900mm.	Orion3-4-M1C-090	2TLA022306R1300	30,470
Orion3 Light Grids, Passive unit, 2 beams, Protected height=1200mm.	Orion3-4-M1C-120	2TLA022306R1400	38,600
Orion3 Extended Light Grids, Active unit, 2 beams, Protected height=500mm, Range=0.5-8m, Type 4.	Orion3-4-K1C-050-E	2TLA022307R0000	67,800
Orion3 Extended Light Grids, Active unit, 2 beams, Protected height=800mm, Range=0.5-8m, Type 4.	Orion3-4-K1C-080-E	2TLA022307R0100	82,785
Orion3 Extended Light Grids, Active unit, 2 beams, Protected height=900mm, Range=0.5-8m, Type 4.	Orion3-4-K1C-090-E	2TLA022307R0200	89,640
Orion3 Extended Light Grids, Active unit, 2 beams, Protected height=1200mm, Range=0.5-8m, Type 4.	Orion3-4-K1C-120-E	2TLA022307R0300	98,273

Safeball one/two hands operates



Description	Type	Ordering code	L.P.(₹)
JSTD1-A Safeballs each have 1NO & 1NC independent switches, maximum load of 30VDC - 2A resistive.	JSTD1-A	2TLA020007R3000	13,178
JSTD1-B Safeballs each have 1NO & 1NC independent switches, maximum load of 30VDC - 2A resistive.	JSTD1-B	2TLA020007R3100	10,689
JSTD1-C Safeballs each have 1NO & 1NC independent switches, maximum load of 30VDC - 2A resistive.	JSTD1-C	2TLA020007R3200	16,044
JSTD1-E Safeballs each have 2NO independent switches, maximum load of 30VDC - 2A resistive.	JSTD1-E	2TLA020007R3400	10,458
JSTD25F Twohand station, 5-pole M12 Male	JSTD25F	2TLA020007R6000	33,632
JSTD25H Twohand station, 8-pole M12 Male	JSTD25H	2TLA020007R6300	39,606



Three positional safety device

Description	Type	Ordering code	L.P.(₹)
Three-position device. Top part with no LED, no extra buttons. Bottom part with cable gland.	JSHD4-1-AA	2TLA019995R0000	Upon request
Three-position device. Top part with no LED, no extra buttons. Bottom part with M12-5 connector.	JSHD4-1-AC	2TLA019995R0100	
Three-position device. Top part with LEDs, front button and top button. Bottom part with Cannon connector.	JSHD4-2-AB	2TLA019995R0200	
Three-position device. Top part with LEDs, front button and top button. Bottom part with Cannon connector and anti-tamper PCB.	JSHD4-2-AB-A	2TLA019995R0300	
Three-position device. Top part with LEDs, front button and top button. Bottom part with M12-8 connector.	JSHD4-2-AD	2TLA019995R0400	
Three-position device. Top part with LEDs, front button and top button. Bottom part with M12-8 connector and anti-tamper PCB.	JSHD4-2-AD-A	2TLA019995R0500	
Three-position device. Top part with LEDs, front button and top button. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button).	JSHD4-2-AF	2TLA019995R0600	
Three-position device. Top part with LEDs, front button and top button. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button) and anti-tamper PCB.	JSHD4-2-AF-A	2TLA019995R0700	
Three-position device. Top part with LEDs, front button and top button. Bottom part with cable gland and PCB with 10 screw connections.	JSHD4-2-AH	2TLA019995R0800	
Three-position device. Top part with LEDs, front button and top button. Bottom part with cable gland and PCB with 10 screw connections and anti-tamper PCB.	JSHD4-2-AH-A	2TLA019995R0900	
Three-position device. Top part with LEDs, front button and top button. Bottom part with cable gland and PCB with 16 screw connections.	JSHD4-2-AJ	2TLA019995R1000	
Three-position device. Top part with LEDs, front button and top button. Bottom part with cable gland and PCB with 16 screw connections and anti-tamper PCB.	JSHD4-2-AJ-A	2TLA019995R1100	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with Cannon connector.	JSHD4-3-AB	2TLA019995R1200	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with Cannon connector and anti-tamper PCB.	JSHD4-3-AB-A	2TLA019995R1300	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with M12-8 connector.	JSHD4-3-AD	2TLA019995R1400	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with M12-8 connector and anti-tamper PCB.	JSHD4-3-AD-A	2TLA019995R1500	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with M12-8 connector and emergency stop.	JSHD4-3-AE	2TLA019995R1600	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button).	JSHD4-3-AF	2TLA019995R1700	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button) and anti-tamper PCB	JSHD4-3-AF-A	2TLA019995R1800	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with M12-5 connector and 1 AS-i node (without front and top button)	JSHD4-3-AG	2TLA019995R1900	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with cable gland and PCB with 10 screw connections.	JSHD4-3-AH	2TLA019995R2000	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with cable gland and PCB with 10 screw connections.	JSHD4-3-AH-A	2TLA019995R2100	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with cable gland and PCB with 16 screw connections.	JSHD4-3-AJ	2TLA019995R2200	

Description	Type	Ordering code	L.P.(₹)
Three-position device. Top part with LEDs and no extra buttons. Bottom part with cable gland and PCB with 16 screw connections and anti-tamper PCB.	JSHD4-3-AJ-A	2TLA019995R2300	Upon request
Three-position device. Top part with LEDs and front button. Bottom part with Cannon connector.	JSHD4-4-AB	2TLA019995R2400	
Three-position device. Top part with LEDs and front button. Bottom part with Cannon connector and anti-tamper PCB.	JSHD4-4-AB-A	2TLA019995R2500	
Three-position device. Top part with LEDs and front button. Bottom part with M12-8 connector.	JSHD4-4-AD	2TLA019995R2600	
Three-position device. Top part with LEDs and front button. Bottom part with M12-8 connector and anti-tamper PCB.	JSHD4-4-AD-A	2TLA019995R2700	
Three-position device. Top part with LEDs and front button. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button).	JSHD4-4-AF	2TLA019995R2800	
Three-position device. Top part with LEDs and front button. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button) and anti-tamper PCB.	JSHD4-4-AF-A	2TLA019995R2900	
Three-position device. Top part with LEDs and front button. Bottom part with cable gland and PCB with 10 screw connection.	JSHD4-4-AH	2TLA019995R3000	
Three-position device. Top part with LEDs and front button. Bottom part with cable gland and PCB with 10 screw connection and anti-tamper PCB.	JSHD4-4-AH-A	2TLA019995R3100	
Three-position device. Top part with LEDs and front button. Bottom part with cable gland and PCB with 16 screw connections.	JSHD4-4-AJ	2TLA019995R3200	
Three-position device. Top part with LEDs and front button. Bottom part with cable gland and PCB with 16 screw connections and anti-tamper PCB.	JSHD4-4-AJ-A	2TLA019995R3300	
Three-position device. Top part with LEDs and top button. Bottom part with Cannon connector.	JSHD4-5-AB	2TLA019995R3400	
Three-position device. Top part with LEDs and top button. Bottom part with Cannon connector and anti-tamper PCB.	JSHD4-5-AB-A	2TLA019995R3500	
Three-position device. Top part with LEDs and top button. Bottom part with M12-8 connector.	JSHD4-5-AD	2TLA019995R3600	
Three-position device. Top part with LEDs and top button. Bottom part with M12-8 connector and anti-tamper PCB.	JSHD4-5-AD-A	2TLA019995R3700	
Three-position device. Top part with LEDs and top button. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button).	JSHD4-5-AF	2TLA019995R3800	
Three-position device. Top part with LEDs and top button. Bottom part with M12-5 connector and 2 AS-i nodes (for front and top button) and anti-tamper PCB.	JSHD4-5-AF-A	2TLA019995R3900	
Three-position device. Top part with LEDs and top button. Bottom part with cable gland and PCB with 10 screw connection.	JSHD4-5-AH	2TLA019995R4000	
Three-position device. Top part with LEDs and top button. Bottom part with cable gland and PCB with 10 screw connection and anti-tamper PCB.	JSHD4-5-AH-A	2TLA019995R4100	
Three-position device. Top part with LEDs and top button. Bottom part with cable gland and PCB with 16 screw connections.	JSHD4-5-AJ	2TLA019995R4200	
Three-position device. Top part with LEDs and top button. Bottom part with cable gland and PCB with 16 screw connections and anti-tamper PCB.	JSHD4-5-AJ-A	2TLA019995R4300	
Three-position device. Top part with no LED, no extra buttons. Bottom part with cable gland and holder for Eva safety sensor.	JSHD4-1-AL	2TLA019995R4700	
Three-position device. Top part with LEDs, front button and top button. Bottom part with Cannon connector. Mainly for replacement of older non modular JSHD4 enabling device (Jakob brand).	JSHD4-2-AK	2TLA019995R4800	
Three-position device. Top part with LEDs, front button and top button. Bottom part with cable gland and holder for Eva safety sensor.	JSHD4-2-AL	2TLA019995R4900	

ABB jokab safety



Description	Type	Ordering code	L.P.(₹)
Three-position device. Top part with LEDs, front button and top button. Bottom part with cable gland, anti-tamper PCB and holder for Eva safety sensor.	JSHD4-2-AL-A	2TLA019995R5000	Upon request
Three-position device. Top part with LEDs and no extra buttons. Bottom part with Cannon connector. Mainly for replacement of older non modular JSHD4 enabling device (Jokab brand).	JSHD4-3-AK	2TLA019995R5100	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with cable gland and holder for Eva safety sensor.	JSHD4-3-AL	2TLA019995R5200	
Three-position device. Top part with LEDs and no extra buttons. Bottom part with cable gland, anti-tamper PCB and holder for Eva safety sensor.	JSHD4-3-AL-A	2TLA019995R5300	
Three-position device. Top part with LEDs and front button. Bottom part with Cannon connector.	JSHD4-4-AK	2TLA019995R5400	
Three-position device. Top part with LEDs and front button. Bottom part with cable gland and holder for Eva safety sensor.	JSHD4-4-AL	2TLA019995R5500	
Three-position device. Top part with LEDs and front button. Bottom part with cable gland, anti-tamper PCB and holder for Eva safety sensor.	JSHD4-4-AL-A	2TLA019995R5600	
Three-position device. Top part with LEDs and top button. Bottom part with Cannon connector.	JSHD4-5-AK	2TLA019995R5700	
Three-position device. Top part with LEDs and top button. Bottom part with cable gland and holder for Eva safety sensor.	JSHD4-5-AL	2TLA019995R5800	
Three-position device with potential free contacts. With 1 front auxiliary button. M23-12 male connector.	HD5-S-102	2TLA023001R0000	
Three-position device with potential free contacts. With 1 front auxiliary button. M23-12 male connector.	HD5-S-104	2TLA023001R0200	
Three-position device with potential free contacts. With 1 front auxiliary button. 2 top buttons M23-12 male connector.	HD5-S-111	2TLA023001R0100	
Active holder (for home position sensor)	HD5-M-001	2TLA920509R0001	
Passive holder	HD5-M-002	2TLA920509R0002	
10 m cable with M23-12 female connector	JSD-TK10-12	2TLA930051R0000	
5 m cable with M23-12 female connector	JSD-TK5-12	2TLA930050R0000	
10 m spiral cable with M23-12 female connector	JSD-TK100S-12	2TLA930034R0000	



Emergency Stop Sign

Description	Type	Ordering code	L.P.(₹)
Elevated yellow surround for panel mounted emergency stop button.	Surround for Inca	2TLA030054R0400	588
Yellow surround for panel mounted emergency stop button, for 22.5 mm hole.	E-Sign 22.5	2TLA030054R0900	294
Yellow surround for panel mounted emergency stop button, for 32.5 mm hole.	E-Sign 32.5	2TLA030054R1000	294



Emergency Stop Button

Description	Type	Ordering code	L.P.(₹)
Emergency stop button for panel mounting, 22.5 mm holes, Tina adaptation to DYNlink and StatusBus functionality, Indication LED in button, detachable terminal blocks.	Inca 1 EC Tina	2TLA030054R1400	11,550
Push button box according to Smile design with 4 buttons. The box is adapted for connection to Pluto IQ using lightbutton function. Connection via a M12 8-pin male connector.	Smile 41 WWWWP	2TLA030057R0000	23,276
Push button box according to Smile design with 4 buttons, one of which is an emergency stop. The box is adapted for connection to Pluto IQ using lightbutton function. Connection via a M12 8-pin male connector.	Smile 41 EWWWP	2TLA030057R0100	27,588

Emergency stop grab wire safety switch



Description	Type	Ordering code	L.P.(₹)
Emergency stop grab wire safety switch, 2NC + 2NO, Up to 50m length, die cast housing, Conduit entry 3xM20	LineStrong1	2TLA050200R0030	18,039
Emergency stop grab wire safety switch, 2NC + 2NO, Up to 100m length, stainless steel 316 body, LED status indication, Conduit entry 3xM20	LineStrong2Z	2TLA050202R0322	48,815
Emergency stop grab wire safety switch, 2NC + 2NO, Up to 80m length, yellow die cast housing, LED status indication, Conduit entry 3xM20	LineStrong2	2TLA050202R0332	25,736
Emergency stop grab wire safety switch, 4NC + 4NO, Entries from both sides of the grab wire switch, Up to 250m length, Stainless steel 316 housing, LED status indication, Conduit entry 3xM20.	LineStrong3DZ	2TLA050204R0322	71,694
Emergency stop grab wire safety switch, 4NC + 4NO, Entries from both sides of the grab wire switch, Up to 250m length, yellow die cast housing, LED status indication, Conduit entry 3xM20	LineStrong3D	2TLA050204R0332	45,633
Emergency stop, 2NC/2NO, stainless steel 316 body, Conduit entry 3xM20	EstrongZ E-Stop 2NC/2NO, M20, SS	2TLA050220R0020	22,019
Emergency stop, 2NC/2NO, stainless steel 316 body, LED status indication, Conduit entry 3xM20	EstrongZ E-Stop 2NC/2NO, M20, SS, LED	2TLA050220R0222	24,675

Safety bumper



Description	Type	Ordering code	L.P.(₹)
Applies to all bumpers, independent on legth. Special shape can be orderd on request. NOTE: Maximum length of a bumper is 3000 mm.	ASB CM Base price	2TLA076200R0000	Upon request
Width 53 mm, Height 100 mm, Black/Yellow, meter	ASB 53/100 B/Y	2TLA076200R0500	
Width 200 mm, Height 400 mm, Black/Yellow, meter	ASB 200/400 B/Y	2TLA076200R0800	

Safety mats



Description	Type	Ordering code	L.P.(₹)
Applies for custom safety mats ASK-1U4 model, except for special surface (See 2TLA076300R0000) Special shape can be orderd on request. NOTE: Maximum safeguarded area is 2350x1350 mm.	ASK-1U4.4-NP CM BA	2TLA076301R0000	Upon request
Applies for custom made safety mats ASK-1T4 model. Special shape can be orderd on request. NOTE: Maximum safeguarded area is 2350x1350 mm.	ASK-1T4.4-NP CM BA	2TLA076301R0200	
Safety mat ASK-1U4.4-NP, No ramp edge trim, safeguarded area is 1000 x 750 mm, incl. 5 + 5 m cables.	ASK-1U4.4-NP 1x.75	2TLA076310R0500	
Safety mat ASK-1T4.4-NP, cast-in ramp edge trim, safeguarded area is 1000 x 1500 mm, incl. 5 + 5 m cables.	ASK-1T4.4-NP 1x1.5	2TLA076310R1200	

Safety contact edges



Description	Type	Ordering code	L.P.(₹)
Aluminum profile for safety edge GE and GP for T-base. Width 25 mm, height 14 mm.	AL 25-14	2TLA076002R0200	Upon request
It's necessary to add these cables to the desired length. For GP safety edges.	Cable LIYY 2x0.34	2TLA076002R1800	
GE series safety edge. EPDM part in meters, 25 mm width, 25 mm height, with T-base.	GE 25-25 EPDM	2TLA076005R0200	
GE series safety edge. EPDM part in meters, 25 mm width, 45 mm height, with T-base.	GE 25-45 EPDM	2TLA076005R0400	
GE series safety edge. KS 6 is an end connection for GE safety edges wider than 25 mm. Cable length 0.5 meters.	GE KS6 0.5M	2TLA076005R4000	

Spot sensors



Description	Type	Ordering code	L.P.(₹)
Safety light beam for up to 10 m distance. M18 steel casing with M12 connector.	Spot 10	2TLA020009R0600	Upon request

Eden sensors



Description	Type	Ordering code	L.P.(₹)
Eva actuator with general code for use with Adam DYN/OSSD sensors in the Eden sensor system, IP69K, yellow, 4pcs of DA 2B spacer rings are included.	Eva General code	2TLA020046R0800	2,163
Eva actuator with unique code for use with Adam DYN/OSSD sensors in the Eden sensor system, IP69K, yellow, 4pcs of DA 2B spacer rings are included.	Eva Unique code	2TLA020046R0900	3,675
Adam safety sensor unit with OSSD signals and information output. M12-5 male connector, IP69K, yellow. 4pcs of DA 1B distance plates and 4pcs of DA 2B distance rings are included.	Adam OSSD-Info M12-5	2TLA020051R5400	6,153
Adam safety sensor unit with OSSD signals and reset with indication. M12-5 male connector, IP69K, yellow. 4pcs of DA 1B distance plates and 4pcs of DA 2B distance rings are included.	Adam OSSD-Reset M12-5	2TLA020051R5600	8,337
Adam safety sensor unit with OSSD signals and information output. M12-8 male connector, IP69K, yellow. 4pcs of DA 1B distance plates and 4pcs of DA 2B distance rings are included.	Adam OSSD-Info M12-8 connector	2TLA020051R5700	7,340
Adam safety sensor unit with DYNlink signal and information output. M12-5 male connector, IP69K, yellow. 4pcs of DA 1B distance plates and 4pcs of DA 2B distance rings are included.	Adam DYN-Info M12-5 connector	2TLA020051R5100	7,140
Adam safety sensor unit with DYNlink signal and reset with indication. M12-5 male connector, IP69K, yellow. 4pcs of DA 1B distance plate and 4pcs of DA 2B distance rings are included.	Adam DYN-Reset M12-5 connector	2TLA020051R5300	9,450

ABB jokab safety



Interlock switches

Description	Type	Ordering code	L.P.(₹)
Safety interlock switch, 2NC+1NO, plastic body and head, 3xM20 conduit entries, 12N holding force. Delivered with standard key.	MKey5	2TLA050003R0100	5,166
Safety interlock switch, plastic body and head, 3xM20 conduit entries, 40N holding force. Delivered with standard key.	MKey5+	2TLA050003R0101	5,702
Safety interlock switch, plastic body and stainless steel head, 3xM20 conduits entries, 12N holding force. Delivered with standard key.	MKey5 SSH	2TLA050003R0110	7,298
Safety interlock switch, plastic body and stainless steel head, 3xM20 conduits entries, 40N holding force. Delivered with standard key.	MKey5+ SSH	2TLA050003R0111	8,096
Safety Interlock Switch, 2NC/NO, Full stainless steel, 3xM20 Conduits entries, 12N Holding force, Standard Key.	MKey5Z	2TLA050003R0120	21,053
Safety interlock switch, rugged polyester housing and stainless steel head, 1xM20 Conduit entry, +24 VDC power to unlock. Delivered with standard key.	MKey9 24VDC	2TLA050007R0112	26,261
Flexible key for MKey safety switches. Stainless steel 316 key, die cast metal housing.	MKey Key 5	2TLA050040R0203	3,308



Fencing system – Quick-Guard

Description	Type	Ordering code	L.P.(₹)
Aluminum post 44x44, 1000 mm with end cap.	J SMA44-L	2TLA040001R0000	
Aluminum post 44x44, 1300 mm with 3pcs feet brackets and end cap.	J SMA44-L	2TLA040001R1000	
Aluminum post 44x44, 1100 mm with 3pcs feet brackets and end cap.	J SMA44A-L	2TLA040001R1100	
Aluminum post 44x44, 1300+1000 mm with 3pcs feet brackets and end cap. 2pcs JSM66 is included with screws.	J SMA44-L	2TLA040001R1200	
Aluminum post 44x44, 1100+2x500 mm with 3pcs feet brackets, 2pcs T-brackets and end cap.	J SMA44A-LM	2TLA040001R1300	
Bracket for JSM9 or JSM63. Includes screws for profile.	J SM60-L	2TLA040003R0000	
Wall bracket for JSHD4 enabling device.	J SM 55	2TLA040005R0500	
Floor bracket in Aluminium. Dimension 40x70x100 mm, pre-assembled. Not recommended for fences with height over 2500 mm	J SM 39-K	2TLA040030R1400	
Infill securing strip in black ABS plastic. L=842 mm for 5 mm panels.	J SM PL1A	2TLA040038R0100	
JSM D2 Handle with screws	J SM D2	2TLA040033R0100	
Door closer incl. mounting components, for conventional door/hatch.	J SM D3	2TLA040033R0200	
Suspension wheel for sliding-/folding door. Suitable in JSM A3130B and JSM A56.	J SM D5	2TLA040033R0400	
Guide sliding element in Polyamide	J SM D8	2TLA040033R0700	
Support wheel with lock/brake, including angled bracket. Wheel diameter 75 mm, height 97 mm. Maximal load 60 kg	J SM D9-K	2TLA040033R1100	Upon request
Hinge C/C 47 mm in Zinc-plated steel, pre-assembled. Used as angled bracket in Quick-Guard S	J SM 35-K	2TLA040033R1400	
Hinge C/C 62 mm in Zinc-plated steel, pre-assembled. Used for conventional doors/hatches. Not as angled bracket because its gap can exceed 20 mm	J SM D1A	2TLA040033R1500	
Spring-loaded pullock for above the door. Brackets are in Zinc-plated steel, Rod are in Stainless steel. Total height 1130 mm	J SM D10A	2TLA040033R2100	
Fitting for Adam & Eva (Eden) for conventional- and folding door/hatch. Need two pieces for a complete Eden.	J SM D4H	2TLA040033R3600	
Door stop, with vibration damper in Zinc-plated steel, for sliding door, horizontal profile.	J SM D13B	2TLA040033R2700	
Cable tie holder including screw and nut, nylon black.	J SM X1	2TLA040033R4300	
Door closer incl. mounting components, for sliding doors.	J SM D19	2TLA042020R5600	
45 deg angle mounting bracket in steel for mounting profiles together, pre-assembled.	J SM 40	2TLA042021R5600	
Cross bar for door 20 x 5 L=400 mm. Natural anodized Aluminium. Suitable small doors/hatches	J SM D14A	2TLA042021R7300	
JSM AS3 Aluminum profile for 50mm sound-absorbing panel, meter	J SM AS3	2TLA042021R8000	
Mounting profile for 50mm sound-absorbing panels. Natural anodized Aluminium, length 6000 mm	J SM AS3	2TLA042021R8100	





We Develop Solutions To Move E-Mobility Forward

ABB lays the foundations for a future of smarter, reliable, and emission-free mobility, accessible by everyone, everywhere



- One stop provider for hardware, software, connectivity and services
- Tailor-made solutions in every scale. From chargers for private homes to public charging infrastructure.

We develop solutions to move you

Bring your challenges to us

ABB has years of experience in designing, manufacturing, installing, and maintaining electric vehicle charging infrastructure as a provider of one-stop, source-to-socket solutions.

Since 2010, ABB has been leading the e-mobility revolution with charging infrastructure suitable for any location combined with connectivity services. With over 100 years' experience in delivering critical grid connection and power distribution infrastructure, we develop smart solutions to move e-mobility forward.

We are at the forefront of EV charging technology, working in partnership with major vehicle manufacturers to develop the charging systems that will power the next generation of electric vehicles.

Whatever your needs, we provide tailor-made solutions scaled to suit your situation – from chargers for use in private homes and residential locations to public car-charging stations and heavy vehicle charging infrastructure.

That includes all the equipment you need to run a successful charging operation. We are your one-stop provider for hardware, software, connectivity, and related services.

Just bring your challenges to us. ABB is ideally positioned to address the intricacies and demands of each project. Our solutions will move you – both today and in the future.



Enabling your charging operation through intelligent connectivity


We develop solutions that offer simple and secure operation of infrastructure using a combination of local and cloud protocols

Cloud Connectivity

The ABB Ability™ Connected Services platform incorporates many years of experience in connecting thousands of chargers to the Internet. Connectivity helps EV charging network operators to optimize operations with deep insights and statistics on energy usage at the charger, site, and network level. The remote control OCPP IoT Ecosystem enables reduced total cost of ownership with 99%+ uptime through remote diagnostics and solution deployment.

Local Connectivity

On-site management of local assets, such as an energy storage system, can bring significant operational savings through balanced energy management. The EV chargers can be upgraded with features that enable connectivity via OPC UA. OPC UA is the most widely adopted interoperability standard for secure, reliable, and platform independent information exchange in the world, with thousands of OPC-compliant products available.

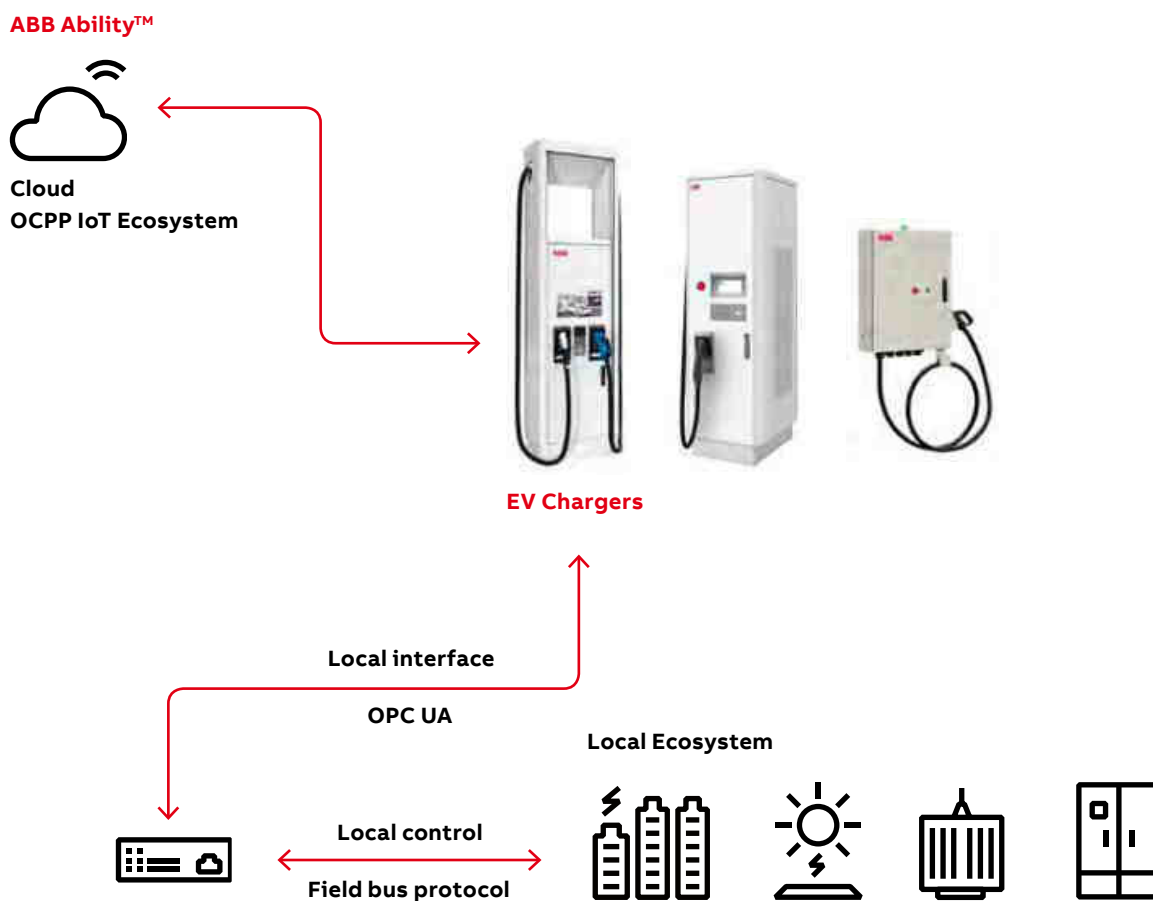

Public and commercial car charging

- Use cases

Charging service should match charging application and demand

Public and commercial EV Charging

AC destination
3-22 kW
4-16 hours



- Office, workplace
- Home
- Multi family housing
- Hotel and hospitality
- Overnight fleet
- Supplement at DC charging sites for PHEVs

DC destination
20-25 kW
1-3 hours



- Office, workplace
- Hotel and hospitality
- Parking structures
- Dealerships
- Urban fleets
- Public or private campus
- Sensitive grid applications

DC Fast
50 to 150 kW
20-90 min



- Retail, grocery, mall, big box, restaurant
- High turnover parking
- Convenience fueling stations
- Highway truck stops and travel plazas
- OEM R&D

DC High Power
150 to 350 kW+
10-20 min



- Highway corridor travel
- Metro 'charge and go'
- Highway rest stops
- Petrol station area's
- City ring service stations
- OEM R&D



Terra AC



Te DC Wallbox 24



Terra 54, Terra 94, Terra 124, Terra 184



Terra HP

Terra AC wallbox

To serve a growing market

Reducing cost of EVs

EVs will be cheaper than internal combustion engine (ICE) alternatives by the mid-to-late 2020s in almost every market

Global EV sales


Electric vehicles will represent 57% of global passenger car sales by 2040



Passenger EV sales

Passenger EV sales will rise to 28 million in 2030 and 56 million by 2040

Terra AC wallbox provides tailored, intelligent and networked charging solutions for any business, home or location.

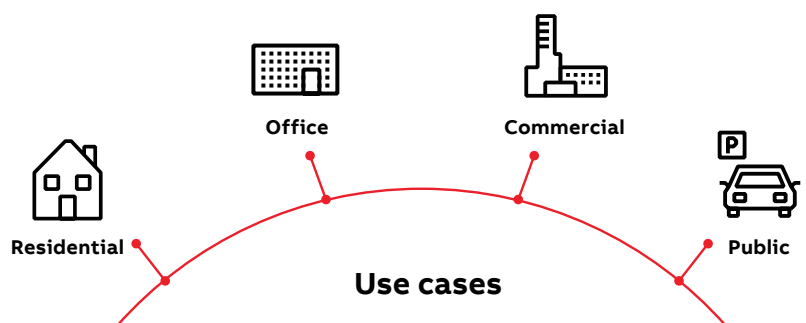

At home

From private homes to multi-tenant homes and residential communities

At work

From small offices to large offices, business parks and complexes

Commercial locations

From hotels to sports institutions and shopping centres

While parking


While on the street or in a car park

Terra AC wallbox benefits

High-value quality



The best value AC charger on the market, providing the exceptional quality expected of the world leader in EV charging.



Enabled for remote software updates to ensure optimal performance while minimizing the need for onsite intervention.



Enabled for remote software updates to ensure optimal performance while minimizing the need for onsite intervention.

Futureproof flexibility



Smart functionality means the wallbox can adapt its power usage and provide optimal charging, today and into the future.



Set up for energy meter integration to provide dynamic load management, reducing energy costs and preventing nuisance tripping of distribution protective devices.



Dedicated App provides easy authentication and control of the AC charger, along with insight into charging status for users.

Terra AC wallbox benefits

Safety and protection



Evaluated and tested to the highest standards by independent, third party safety certification organizations.



Current limiting protection allows maximum charging power without nuisance tripping, aligned with the design of a given building's electrical distribution system.



Integrated protections including DC ground fault and over voltage protect both user and car.

India portfolio

AC charger for electric vehicles, type 2

Power supply network: 220 ... 240 V single phase and 380 ... 415 V three phase, 50 / 60 Hz



Rated Power (kW)	Max Current (A)	Socket outlet or connector type	Other features	Type	Order code	L.P. (₹)
Single phase						
3.7	16	Socket with shutter, type 2	-	TAC-W4-S-0	ABB6AGC082587	Upon request
3.7	16	Socket with shutter, type 2	RFID	TAC-W4-S-R-0	ABB6AGC085384	
7.4	32	Socket, type 2	RFID, 4G	TAC-W7-T-R-C-0	ABB6AGC085383	
7.4	32	Socket, type 2	RFID	TAC-W7-T-R-0	ABB6AGC085382	
7.4	32	Cable 5 m, type 2	RFID, 4G	TAC-W7-G5-R-C-0	ABB6AGC085385	
7.4	32	Socket, type 2	-	TAC-W7-T-0	ABB6AGC081278	
3.7	16	Socket with shutter, type 2	-	TAC-W4-S-0	ABB6AGC082587	
3.7	16	Socket with shutter, type 2	RFID	TAC-W4-S-R-0	ABB6AGC085384	
7.4	32	Socket, type 2	RFID, 4G	TAC-W7-T-R-C-0	ABB6AGC085383	
7.4	32	Socket, type 2	RFID	TAC-W7-T-R-0	ABB6AGC085382	
7.4	32	Cable 5 m, type 2	RFID, 4G	TAC-W7-G5-R-C-0	ABB6AGC085385	
7.4	32	Socket, type 2	-	TAC-W7-T-0	ABB6AGC081278	
		Cable 5 m, type 2	RFID	TAC-W7-G5-R-0	ABB6AGC082155	
Single phase with display and MID certification						
7.4	32	Socket, type 2	RFID, 4G	TAC-W7-T-RD-MC-0	ABB6AGC082174	Upon request
7.4	32	Cable 5 m, type 2	RFID, 4G	TAC-W7-G5-RD-MC-0	ABB6AGC085386	
Three phase						
11	16	Cable 5 m, type 2	RFID	TAC-W11-G5-R-0	ABB6AGC082156	Upon request
22	32	Socket, type 2	-	TAC-W22-T-0	ABB6AGC081279	
22	32	Socket, type 2	RFID	TAC-W22-T-R-0	ABB6AGC082152	
22	32	Socket, type 2	RFID, 4G	TAC-W22-T-R-C-0	ABB6AGC082153	
22	32	Socket with shutter, type 2	RFID	TAC-W22-S-R-0	ABB6AGC082589	
22	32	Socket with shutter, type 2	RFID, 4G	TAC-W22-S-R-C-0	ABB6AGC082154	
22	32	Cable 5 m, type 2	RFID, 4G	TAC-W22-G5-R-C-0	ABB6AGC082157	
Three phase with display and MID certification						
22	32	Socket, type 2	RFID	TAC-W22-T-RD-M-0	ABB6AGC081280	Upon request
22	32	Socket, type 2	RFID, 4G	TAC-W22-T-RD-MC-0	ABB6AGC081281	
22	32	Socket with shutter, type 2	RFID, 4G	TAC-W22-S-RD-MC-0	ABB6AGC081282	
22	32	Cable 5 m, type 2	RFID, 4G	TAC-W22-G5-RD-MC-0	ABB6AGC081285	

Terra DC wallbox

The smart e-mobility investment

Limited changes required to existing electrical infrastructure due to reduced power requirements


Increasing revenue opportunities for operators and owners by supporting current and future electric vehicles with high voltage charging



Enabled for smart charging via OCPP to balance load demands and reduce infrastructure costs

Developed with leading electric vehicle manufacturers, trusted by energy suppliers and governments, the Terra DC wallbox makes fast charging safe, smart and future-compatible

Terra DC wallbox is a future-proof investment supporting current and future EVs with high voltage charging, applicable to a wide variety of use cases, in an ultra-compact footprint, that is safe and reliable, for residential use too.

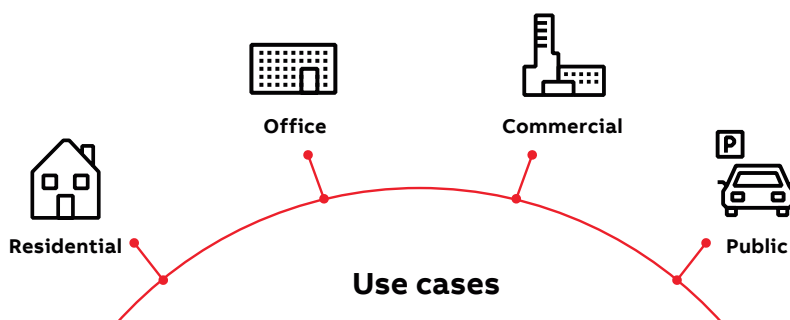

Residential
Multi-tenant homes, residential communities

Office
Small and large offices, business parks and complexes

Commercial
Hotels & hospitality sports institutions, shopping centres, commercial fleets, public or private campus, parking structures, car dealerships, race tracks


Public assets
Bus depots, utility, sensitive grid applications

Terra DC wallbox benefits

Intelligent design: compact, convenient, connected



The DC wallbox with **ultra-compact footprint** enables flexibility in installation to serve a variety of site conditions



Intuitive interface with a **user-friendly 7-inch color touch screen** and easy-reach cables for convenient parking and charging



Broad range of connectivity options including **3G/4G modem, Ethernet and GSM for easy control** and integration with existing infrastructure

Terra AC wallbox benefits

Future-proof: ROI maximized



High voltage charging capabilities supporting the EVs from today and into the future



Enabled for smart charging via OCPP to balance load demands and reduce infrastructure costs



Connection to ABB Ability platform manages over-the-air-authentication and payment, remote diagnostics, software updates and asset **monitoring**

Safety: built-in protection



Evaluated and tested to the highest standards by independent, third party safety certification organizations



Certified with EMC Class B protection for safe use in residential areas



Integrated ground-fault and trip protection protect both user and car

India portfolio, three phase

Description

DC charger for electric vehicles, CCS2 and CHAdeMO

Power supply network: 3 phase 400 V AC +/-10 % (50/60 Hz)

Connectivity: Cellular connection, 3G / 4G, 2 port RJ45, Ethernet


Metal Connector/cable holders for inside use provided standard with the product



Rated continuous power (kW)	Rated peak power (kW)	Charging standard	EMC classification	Cable length (m / ft)	Type	Ordering code	L.P. (₹)
22.5	24	CCS2	Class A	3.5 / 12	TWB CE 24 C 0-7M-A-0	6AGC074509	Upon request
22.5	24	CCS2	Class A	7 / 23	TWB CE 24 C 7-7M-A-0	6AGC076048	
22.5	24	CCS2	Class B	3.5 / 12	TWB CE 24 C 0-7M-0-0	6AGC077815	
22.5	24	CCS2	Class B	7 / 23	TWB CE 24 C 7-7M-0-0	6AGC077816	
22.5	24	CHAdeMo / CCS2	Class A	3.5 / 12	TWB CE 24 CJ 0-7M-A-0	6AGC003683	
22.5	24	CHAdeMo / CCS2	Class A	7 / 23	TWB CE 24 CJ 7-7M-A-0	6AGC076046	
22.5	24	CHAdeMo / CCS2	Class B	3.5 / 12	TWB CE 24 CJ 0-7M-0-0	6AGC077814	
22.5	24	CHAdeMo / CCS2	Class B	7 / 23	TWB CE 24 CJ 7-7M-0-0	6AGC077817	

Terra 54 DC Fast Charger

The pillar of growth for smart, sustainable mobility

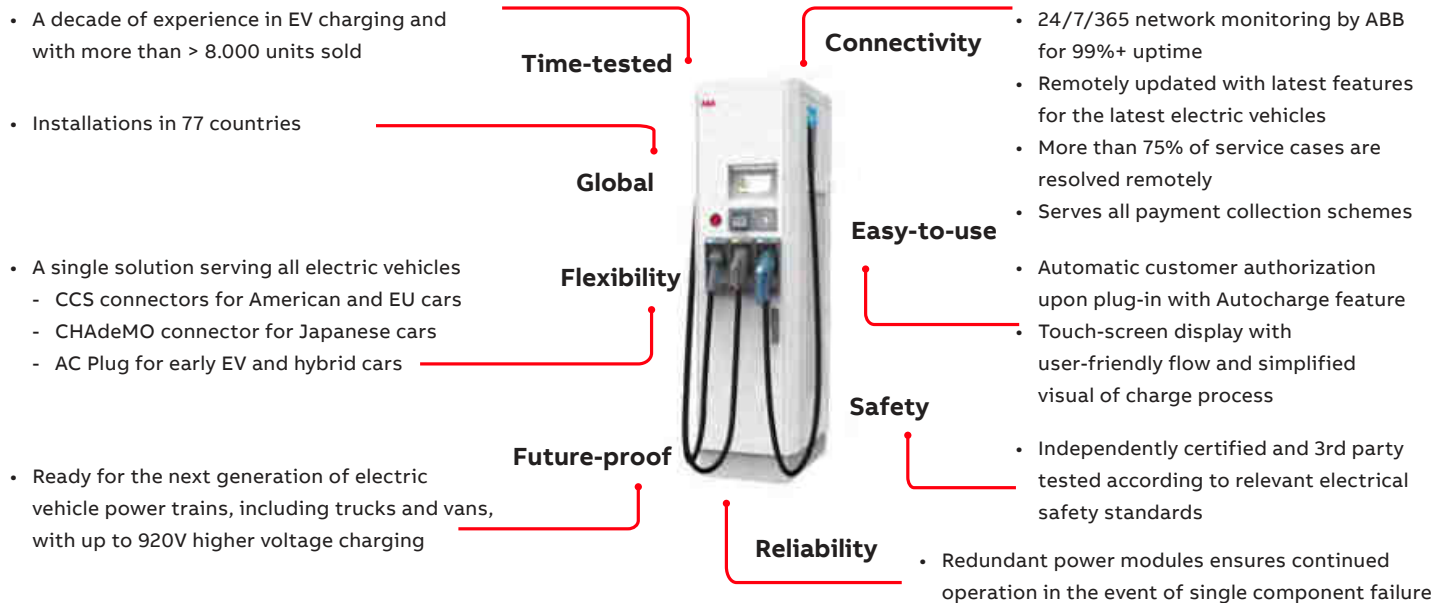

Configurations

Possible configurations

Terra 54 is available in the following configurations, all with CCS cable from left, and CHAdeMO cable (optional) from right side:

- Terra 54 CJG: CCS, CHAdeMO and (22 or) 43 kW AC connector
- Terra 54 CJT: CCS, CHAdeMO and 22 kW AC socket
- Terra 54 CJ: CCS and CHAdeMO
- Terra 54 CT: CCS and 22 kW AC socket

Applications

- Highway petrol / service stations
- Metropolitan / urban areas
- Commercial fleet operators
- EV infrastructure operators and service providers



Fast charging beyond 50 kW

City Charging Point

The Terra chargers can provide a quick refill adding 100 km or range in as little as 25 minutes (Terra 54) or 15 minutes (Terra 94).



one electric vehicle up to
90 kW



Retail / Shopping Center

The Terra 124 charger can provide a full battery charge to two vehicles simultaneously by the time of a shopping errand, and recharge a third vehicle using the AC outlet.



one electric vehicles up to
120 kW



two electric vehicles up to
60 kW



Fast Charging Station

The higher power versions of the Terra chargers can add 100 km of range in as little as 8 minutes* and fast-charge two vehicles at the same time



one electric vehicle up to
180 kW



two electric vehicles up to
90 kW



* actual charging speed depends on the electric vehicle model and charging condition

Value proposition



Compact footprint

- Small footprint makes it perfect for urban environments with limited available space
- No need for separate power cabinets, significantly reducing the installation costs versus other high power charging solutions.



Maximized revenue generation

- Supports all charging standards on the market and all battery sizes
- Can charge up to three vehicles at once (2 charging fast and 1 slow/AC charging)
- Large number of customizations: credit card payment terminal, cable management system, customized screen and logos, branded cabinet



Future ready

- With output voltage up to 920 VDC it's ready to charge the next generation of EV's
- Supports future business needs with easy power upgrade up to 180kW

Ordering codes

Voltage level (Vdc)	Rated power (kW)	DC connector 1	DC connector 2	AC connector	Type	Order code	
Low voltage power trains							
150-500	20	CCS-2		AC Type-2 socket (22 kW)	Terra CE 24 CT 0-7M-0-0	6AGC074672	
		CCS-2		AC Type-2 cable (22 kW)	Terra CE 24 CG 22 0-7M-0-0	6AGC073442	
		CCS-2	CHAdEMO		Terra CE 24 CJ 0-7M-0-0	6AGC073424	
		CCS-2	CHAdEMO	AC Type-2 cable (43 kW) 50	Terra CE 24 CJG 0-7M-0-0	6AGC073423	
50	CCS-2				Terra CE 54 C 0-7M-0-0	6AGC075211	
	CCS-2			AC Type-2 socket (22 kW)	Terra CE 54 CT 0-7M-0-0	6AGC071873	
	CCS-2			AC Type-2 cable (43 kW)	Terra CE 54 CG 0-7M-0-0	6AGC066382	
	CCS-2	(CHAdEMO as upgrade)		AC Type-2 cable (43 kW)	Terra CE 54 CG 0-7M-0-SLA	6AGC071786	
	CCS-2			AC Type-2 cable (22 kW)	Terra CE 54 CG 22 0-7M-0-0	6AGC073428	
	CCS-2	CHAdEMO			Terra CE 54 CJ 0-7M-0-0	6AGC063492	
	CCS-2	CHAdEMO		AC Type-2 socket (22 kW)	Terra CE 54 CJT 0-7M-0-0	6AGC071512	
	CCS-2	CHAdEMO		AC Type-2 cable (22 kW)	Terra CE 54 CJG 22 0-7M-0-0	6AGC071735	
	CCS-2	CHAdEMO		AC Type-2 cable (43 kW)	Terra CE 54 CJG 0-7M-0-0	6AGC063056	
	Low and high voltage power trains						
	150-920	50	CCS-2			Terra CE 54 HV C 0-7M-0-0	6AGC070818
			CCS-2		AC Type-2 socket (22 kW)	Terra CE 54 HV CT 0-7M-0	6AGC077783
CCS-2				AC Type-2 cable (43 kW)	Terra CE 54 HV CG 0-7M-0-0	6AGC076835	
CCS-2				AC Type-2 cable (22 kW)	Terra CE 54 HV CG 22 0-7M-0-0	6AGC080559	
CCS-2			CHAdEMO		Terra CE 54 HV CJ 0-7M-0-0	6AGC076568	
CCS-2			CHAdEMO	AC Type-2 socket (22 kW)	Terra CE 54 HV CJT 0-7M-0-0	6AGC077781	
CCS-2			CHAdEMO	AC Type-2 cable (43 kW)	Terra CE 54 HV CJG 0-7M-0-0	6AGC066474	
CCS-2			CHAdEMO	AC Type-2 cable (22 kW)	Terra CE 54 HV CJG 22 0-7M-0-0	6AGC080560	
90		CCS-2			Terra CE 94 C 0-7M-0-0	6AGC080803	
		CCS-2	CHAdEMO		Terra CE 94 CJ 0-7M-0-0	6AGC080805	
		CCS-2	CCS-2		Terra CE 94 CC 0-7M-0-0	6AGC080804	
		CCS-2	CHAdEMO	AC Type-2 socket (22 kW)	Terra CE 94 CJT 0-7M-0-0	6AGC080806	
120		CCS-2			Terra CE 124 C 0-7M-0-0	6AGC083318	
		CCS-2	CHAdEMO		Terra CE 124 CJ 0-7M-0-0	6AGC082793	
		CCS-2	CCS-2		Terra CE 124 CC 0-7M-0-0	6AGC082794	
		CCS-2	CHAdEMO	AC Type-2 socket (22 kW)	Terra CE 124 CJT 0-7M-0-0	6AGC084095	
		CCS-2	CCS-2	AC Type-2 socket (22 kW)	Terra CE 124 CCT 0-7M-0-0	6AGC082795	
		CCS-2			Terra CE 154 C 0-7M-0-0	**	
150		CCS-2	CHAdEMO		180 kW Terra CE 154 CJ 0-7M-0-0	** **	
		CCS-2	CCS-2		180 kW Terra CE 154 CC 0-7M-0-0	** **	
		CCS-2	CHAdEMO	AC Type-2 socket (22 kW)	180 kW Terra CE 154 CJT 0-7M-0-0	** **	
		CCS-2	CCS-2	AC Type-2 socket (22 kW)	180 kW Terra CE 154 CCT 0-7M-0-0	** **	
180		CCS-2			Terra CE 184 C 0-7M-0-0	6AGC080810	
		CCS-2	CHAdEMO		Terra CE 184 CJ 0-7M-0-0	6AGC080812	
		CCS-2	CCS-2		Terra CE 184 CC 0-7M-0-0	6AGC080811	
		CCS-2	CHAdEMO	AC Type-2 socket (22 kW)	Terra CE 184 CJT 0-7M-0-0	**	
		CCS-2	CCS-2	AC Type-2 socket (22 kW)	Terra CE 184 CCT 0-7M-0-0	**	
	CCS-2						

ABB Heavy Commercial Vehicle charging

ABB offers a complete portfolio for charging electric Heavy Commercial Vehicles such as buses and trucks.

With increasing air pollution levels in cities and a stronger public commitment to cleaner transportation, electric city buses and trucks offer a great opportunity to reduce emissions in cities, while also reducing operational costs.

ABB offers a complete portfolio for charging electric Heavy Commercial Vehicles such as buses and trucks. Charging can be done during daily operation at any given stop or rest opportunity, charge time typically is between 3 and 6 minutes and requires an automated connection device and high power charging. This so called Opportunity Charging provides an ideal solution to ensure zero-emission public transport during the day without impacting the normal operation on the route.

Since most vehicles will return to a depot for overnight parking, this also provides an ideal moment to charge the vehicles up to 100% and to precondition the vehicle before it goes back into operation. Normally this requires lower charging powers and can be done by a connector or by automated connection devices and is called Overnight Charging. Different power levels and interfaces are available to either charge 1 vehicle per charger or to have sequential charging, which offers an efficient solution to charge up to 3 vehicles with 1 charger.

Charging powers start at 24 kW and can be extended up to 150 kW for overnight charging and up to 600 kW for opportunity charging. The following 3 interfaces are supported:

1. Connector – CCS1 or CCS2;
2. Pantograph Up - roof mounted pantograph;
3. Pantograph Down - pantograph mounted on the infrastructure.



ABB Heavy Commercial Vehicle charging



Flexibility

The Heavy Commercial Vehicle charging product line offers a wide range of chargers, providing maximum flexibility to the operator or fleet owner to electrify a single bus line up to a complete fleet of electric buses or trucks with the required power level.



Complies with international standards

ABB's high power chargers are designed to the highest international electrical, quality and safety standards, including IEC 61851-23, guaranteeing safe and reliable operation in public areas.



Future proof

ABB products support a wide output voltage range of 150 – 850 V DC and some products even up to 920 V DC, supporting today's and next generation of cars, buses and trucks.



Always connected – remote service & data management

ABB chargers come with an extensive suite of connectivity features including remote monitoring, remote management and smart software upgradeability. These advanced services enable high uptime of the equipment, a fast response to problems and provide owners of chargers with powerful insight into statistics of their charging operation.



Interoperability

Use the same charging infrastructure for different vehicle configurations and different vehicle makes.



ABB is your experienced partner

The new fast charging solution for Heavy Commercial Vehicles is based on ABB's solid experience in charging solutions for electric vehicles. Since early 2010, ABB has sold more than 10,500 fast charging systems for electric vehicles around the world and is a global leader in this market.



Modular design

The modular power cabinets can be expanded at any time, allowing customers to invest in increasing charging power in line with the emergence of higher-capacity in the (near) future.



HVC-150C with 150 kW power cabinet and three depot charge boxes with sequential charging

Pantograph up

Charge electric buses with a roof mounted pantograph



HVC-300PU with 300 kW power cabinet and slim design charge pole

ABB offers an ideal solution to charge electric buses that are equipped with a roof mounted pantograph. This allows to charge larger fleets of electric buses overnight in a range of 50-150 kW per vehicle and during the day with 150 kW up to 600 kW for opportunity charging.

Main features and key benefits:

- Voltage range from 150-850 V
- Power range of 50-100-150 kW for overnight charging
- Sequential charging with up to 3 outlets for overnight charging
- Power range of 150-300-450-600 kW for opportunity charging
- Safe and reliable fully automated connection
- Compliant with ISO 15118 / DIN 70121 / IEC 61851-23 & -24
- OCPP compliant
- Remote diagnostics and management tools

Pantograph down

Charge electric buses following the OppCharge protocol



HVC-450PD with 450 kW power cabinet and standard charge pole

ABB offers an ideal solution to charge electric buses fully automated following the OppCharge protocol. With typical charge times of 3 to 6 minutes the system can easily be integrated in existing operations, ensuring zero-emission public transit during the day without impacting on the normal operation of the route.

Main features and key benefits:

- Voltage range from 150-850 V
- Power range of 150-300-450-600 kW
- Charge in 3 to 6 minutes
- One charger can serve multiple vehicle types and brands
- Safe and reliable fully automated connection
- Compliant with OppCharge / IEC 61851-23
- OCPP compliant
- Remote diagnostics and management tools





Uninterruptible power supply systems

Standalone and modular
portfolio 1 kVA to 5 MVA

UPS product overview

1 kVA to 5 MVA



GENERAL DATA	PowerValue LI Up / Pro	PowerValue 11T G2	PowerValue 11 RT	PowerValue 11/31 T
UPS frame rated power	Up: 360/480/600/900/1200 W Pro: 360/480/700/1050/1400 W	1 / 2 / 3 / 6 / 10 kVA	1 / 2 / 3 / 6 / 10 kVA	10 / 20 kVA
UPS module rated power	–	–	–	–
UPS output rated PF	0.6 / 0.7 (model dependent)	0.9 - 1.0	up to 1.0	0.9
Max. no of parallel frames	–	Up to 3 units (model dependent)	Up to 3 units (model dependent)	Up to 4 units
Max no of parallel modules across frames	–	–	–	–
Max system power	–	30 kW	30 kW	80 kVA
Wiring	1-ph + N + PE	1-ph + N + PE	1-ph + N + PE	1-ph or 3-ph + N + PE (selectable)
UPS type	Standalone tower	Standalone tower	Rack or tower convertible	Standalone tower
Topology	Line-interactive	Online double conversion	Online double conversion	Online double conversion
INPUT				
Nominal input voltage	230 VAC	220/230/240 VAC (1–3 kVA) 208/220/230/240 VAC (6–10 kVA)	208, 220, 230, 240 VAC	220 / 380, 230 / 400, 240 / 415 VAC
Voltage range	170–280 VAC	100–300 VAC (1–3 kVA) 100–276 VAC (6–10 kVA)	110 – 276 VAC	1-ph 110 – 276 VAC 3-ph 190 – 486 VAC
Frequency range	50 / 60 Hz	45–55 Hz / 54–66 Hz 45–55 Hz / 54–66 Hz (extendable to 40~70 Hz at load < 60%)	45 – 55 Hz for 50 Hz systems 54 – 66 Hz for 60 Hz systems	45 – 55 Hz for 50 Hz systems 54 – 66 Hz for 60 Hz systems
Current THD at 100% load	–	5% with full resistive load (1–3 kVA) < 3% with full resistive load (6–10 kVA)	< 3%	≤ 5%
Power factor at 100% load	–	≥ 0.99 (1–3 kVA) ≥ 0.995 (6–10 kVA)	≥ 0.995	≥ 0.99
OUTPUT				
Rated output voltage (load dependent)	230 VAC	220/230/240 VAC (1–3 kVA) 208/220/230/240 VAC (6–10 kVA)	208, 220, 230, 240 VAC	220, 230, 240 VAC
Voltage THD (with linear load)		< 2% linear load, < 6% non linear load (1–3 kVA) < 1% linear load, < 5% non linear load (6–10 kVA)	≤ 1%	≤ 2%
Rated frequency	50 Hz (60 Hz) +/- 1 Hz	50 or 60 Hz	50 or 60 Hz (selectable)	50 or 60 Hz (selectable)
EFFICIENCY				
Line-interactive	≥ 95% (normal mode)	–	–	–
Double conversion	–	Up to 95%	Up to 95%	Up to 94%
Eco-mode	–	Up to 98%	95% (1–3 kVA); 98% (6–10 kVA)	97%
COMMUNICATIONS				
User Interface	Touchscreen LCD (Up), LCD (Pro)	LCD	LCD	LCD + LEDs
Communication ports	USB and RS232	SNMP; ModBus; AS400; Environmental monitoring sensor probe	USB, RS-232, SNMP slot, potential-free contacts	USB, RS-232, SNMP slot, potential-free contacts (optional)
Software	Monitoring and shutdown software available as option			

UPS product overview

1 kVA to 5 MVA



PowerScale	PowerWave 33	TLE
10 / 15 / 20 / 25 / 30 / 40 / 50 kVA	60 / 80 / 100 / 120 / 160 / 200 / 250 / 300 / 400 / 500 kW	160 / 200 / 320 / 400 / 600 / 800 kW
–	–	–
0.9	1.0	1.0
Up to 20 units	Up to 10 units	Up to 6 units
–	–	–
1000 kVA	5000 kW	4800 kW
3ph + N + PE	3ph + N + PE	3ph+N+PE
Standalone tower	Standalone tower	Standalone tower
Online double conversion	Online double conversion	Online double conversion
220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC
161/280 – 264/460 VAC	138/240 – 264/460 VAC	196/340 - 265/460 VAC
35 – 70 Hz	35 – 70 Hz	45 – 66Hz
≤ 3%	≤ 4%	< 3%
≥ 0.99	≥ 0.99	> 0.99
220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC
< 2%	< 2%	< 2.5%
50 or 60 Hz (selectable)	50 or 60 Hz (selectable)	50 or 60 Hz (selectable)
–	–	–
Up to 95.5%	Up to 96%	Up to 96.8%
98%	99%	Up to 98.9%
LCD + mimic diagram	Graphical touch screen (optional on 160–200 kW), LCD + mimic diagram (on 60–200 kW only)	System graphical touch screen LCD
USB (optional), RS-232, SNMP slot, potential-free contacts (optional)	USB, RS-232, SNMP slot, potential-free contacts	RS232, SNMP (Modbus IP, RS232, RS485 & BacNet IP)
Monitoring and shutdown software available as option		

UPS product overview

1 kVA to 5 MVA



DPA UPScale RI	DPA UPScale ST	DPA 250 S4	Conceptpower DPA 500
10 / 20 / 40 / 80 kW	40 / 60 / 80 / 120 / 200 kW	300 kW	500kW
10 / 20 kW	10 / 20 kW	50 kW	100 kW
1.0	1.0	1.0	1.0
1 subrack	Up to 4 frames	Up to 5 frames	Up to 6 frames
4 modules	20 modules	30 modules	30 modules
80 kW	400 kW	1500 kW	3000 kW
3ph + N + PE	3ph + N + PE	3ph + N + PE	3ph + N + PE
Modular (DPA)	Modular (DPA)	Modular (DPA)	Modular (DPA)
Online double conversion	Online double conversion	Online double conversion	Online double conversion
220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC
150/260 – 264/460 VAC	150/260 – 264/460 VAC	161/280 – 264/460 VAC	161/280 – 264/460 VAC
35 – 70 Hz	35 – 70 Hz	35 – 70 Hz	35 – 70 Hz
< 3%	< 3%	< 3%	< 3.5%
≥ 0.99	≥ 0.99	≥ 0.99	≥ 0.99
220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC	220 / 380, 230 / 400, 240 / 415 VAC
< 1.5%	< 1.5%	< 2%	< 2%
50 or 60 Hz (selectable)	50 or 60 Hz (selectable)	50 or 60 Hz (selectable)	50 or 60 Hz (selectable)
–	–	–	–
Up to 96%	Up to 96%	Up to 97.6% module efficiency, up to 97.4% system efficiency	Up to 96%
98%	98%	99%	99%
Module level LCD + mimic diagram, Remote system display optional	Module level LCD + mimic diagram, System graphical display	Module level LCD + mimic diagram, System graphical display	Module level LCD + mimic diagram, System graphical display
USB, RS-232, SNMP slot, potential-free contacts	USB, RS-232, SNMP slot, potential-free contacts	USB, RS-232, SNMP slot, potential-free contacts	USB, RS-232, SNMP slot, potential-free contacts
Monitoring and shutdown software available as option			

UPS product overview

1 kVA to 5 MVA



GENERAL DATA	PowerLine DPA IEC	SG Series
UPS frame rated power	20 -120 kVA (3ph); 20 - 80 kVA (1ph)	10–500 kVA
UPS module rated power	20 - 40 kVA	–
UPS output rated PF	1.0	0.9
Max. no of parallel frames	2 (Redundancy)	Up to 6 units
Max no of parallel modules across frames	6	–
Max system power	120 kVA	3000 kVA
Wiring	3ph + N+ PE (3ph); 1ph + N + PE (1ph)	3ph + N +PE
UPS type	Modular (DPA)	Standalone tower
Topology	Online double conversion	Online double conversion
INPUT		
Nominal input voltage	400/230 VAC, others on request	380/400/415 VAC
Voltage range	For loads < 100% (–15%, +10%), < 80% (–20%, +10%), < 60% (–25%, +10%)	340–460 VAC
Frequency range	35–70 Hz	45–66 Hz
Current THD at 100% load	< 4%	< 2%
Power factor at 100% load	0.99	0.99
OUTPUT		
Rated output voltage (load dependent)	400/230 VAC (3ph); 230 VAC (1ph)	3x 380/400/415 VAC
Voltage THD (with linear load)	< 2%	< 1.5%
Rated frequency	50 or 60Hz (selectable)	50 or 60 Hz (selectable)
EFFICIENCY		
Line-interactive	–	–
Double conversion	Up to 96%	up to 94.6%
Eco-mode	98.5%	up to 98.7% (eBoost)
COMMUNICATIONS		
User Interface	System graphical display (HMI) + LCD panel UPS Module	System Graphical Display LCD
Communication ports	SNMP; ModBus; potential free contacts	RS232, SNMP (Modbus IP, RS232, RS485 & BacNet IP)
Software	Monitoring and shutdown software available as option	

Electrical installation solutions for buildings

A world of advantages

Miniature circuit-breakers

1 S200 Series
Circuit breakers up to 63 A
S200, S200M and S200P:
For residential, commercial and
industrial use up to 25 kA.
S200U, S200UP and SU200PR
with certification acc. to:
Certification UL489/CSA 22.2
No. 5 (US and Canada).

2 SN201 Series
SN201 series circuit breakers
including one pole and neutral
in one module width up to
40 A specific for household
applications and tertiary sector.

3 S800 Series
S800 circuit breakers with high
breaking capacity up to 125 A
S800B : 16 kA breaking capacity.
S800C : 25 kA breaking capacity.
S800N : 36 kA breaking capacity.
S800S : 50 kA breaking capacity.

Residual current protection

4 F200 Series
Residual current devices up to 125 A
F200: Residential, tertiary and industrial.

5 DDA200 and DDA800 Series
RCD blocks adaptable to the S200
and S800 circuit-breaker series up
to 63 A and 100 A respectively.



Increased terminal opening for higher wire gauges up to 35 mm². For conductors with or without connector sleeves. Fulfills still the requirements for protection degree IP20 (finger safe) acc. to IEC/EN 60529. Integrated plate protecting flexible cables from damage and homogenous pressure in the terminal opening.



Multiple certification marks visible on the upper and lower face of the S200 circuit breakers. Laser marking for reliable readability. Real contact position indication, directly connected to the moving contact, for more comfort and safety. Individual identification code for each MCB on the front.

Switch with intermediate trip position (TRIP). S800 circuit breakers differentiate manual actuation from over-current trip.



Label-holder built into SN200 circuit breakers. Easy identification of protected circuits. One pole plus neutral in a width of just 17.6 mm.



The green/red switch colour clearly indicates the connected/disconnected status.



Terminal on the front face for fail-safe function.



Failsafe bi-directional cylinder-lift terminal at top and bottom (available for the entire System pro M compact® range). Ideal for connection of cables and busbars simultaneously.



Electrical installation solutions for buildings

A world of advantages

6 DS200 Series

Overcurrent and residual current protection in a single device, just two modules width. Suitable for residential, tertiary and industrial applications.

7 RD3 residual current relays

Residual current relays with the possibility to set sensitivity and intervention time. Ideal to obtain time and sensitivity combinations and to achieve selectivity with other residual current devices.


Other protection devices

8 OVR series surge protective devices

Protection of electrical equipment against surges caused by lightning or other grid disruptions.

9 E90 fuseholders and fuse disconnectors

E90: Disconnecter series up to 32 A.
E90h: Compact series up to 32 A.
E90 50/125: Series up to 125 A.

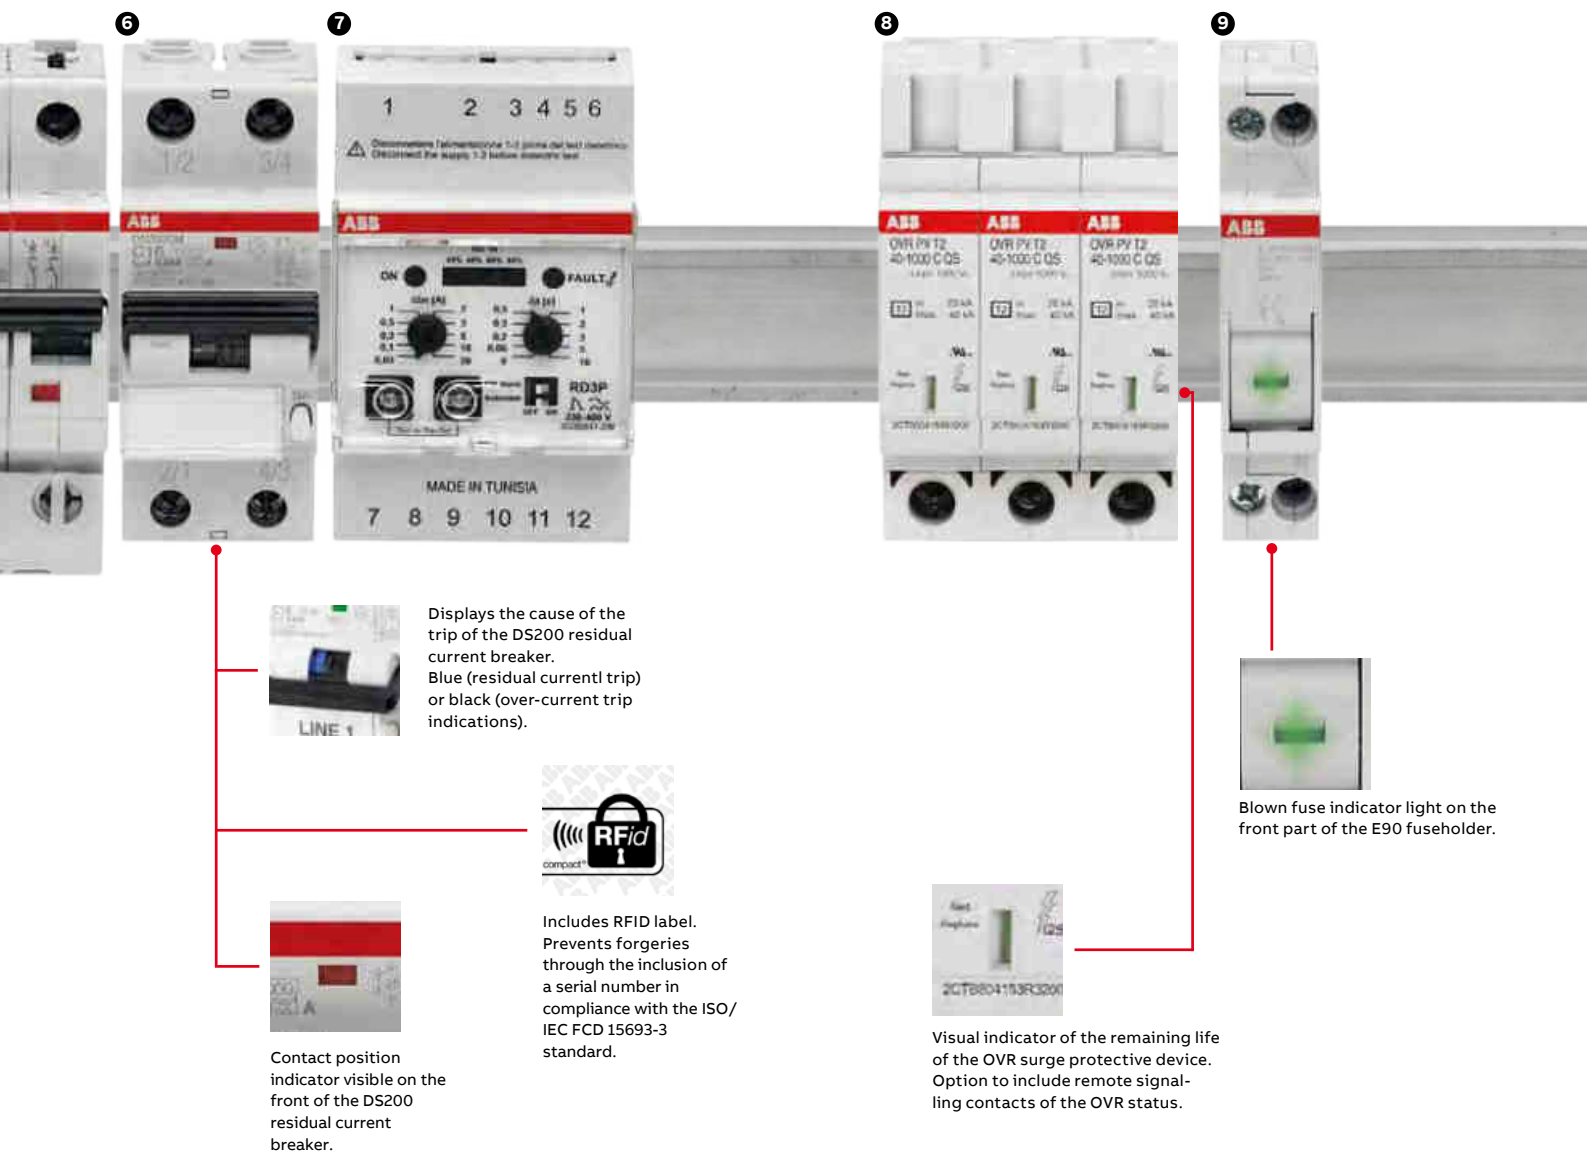

Electrical installation solutions for buildings

A world of advantages

Command and control

10 Contactors, latching relays and installation relays

ESB/EN..N series installation contactors.
E297 series installation relays.
E290 and E260 series latching relays.

11 Switch disconnectors

E200 series
switch disconnectors
From 1 to 4 poles.
Up to 125 A.


SD200 switch disconnectors
From 1 to 4 poles.
Up to 63 A.
Fully compatible with
MCB accessories.

12 E210 series on-off switches, push buttons and indicator lamps

E211 and E218 series on-off switches.
E213 series change over switches.
E214 series group switches.
E215 and E217 series push buttons.
E219 series single, double and triple indicator lights.

13 D-Line digital and AT analogue time switches

D1 and D2 weekly digital time switches.
D365 yearly digital time switches.
AT analogue time switches.

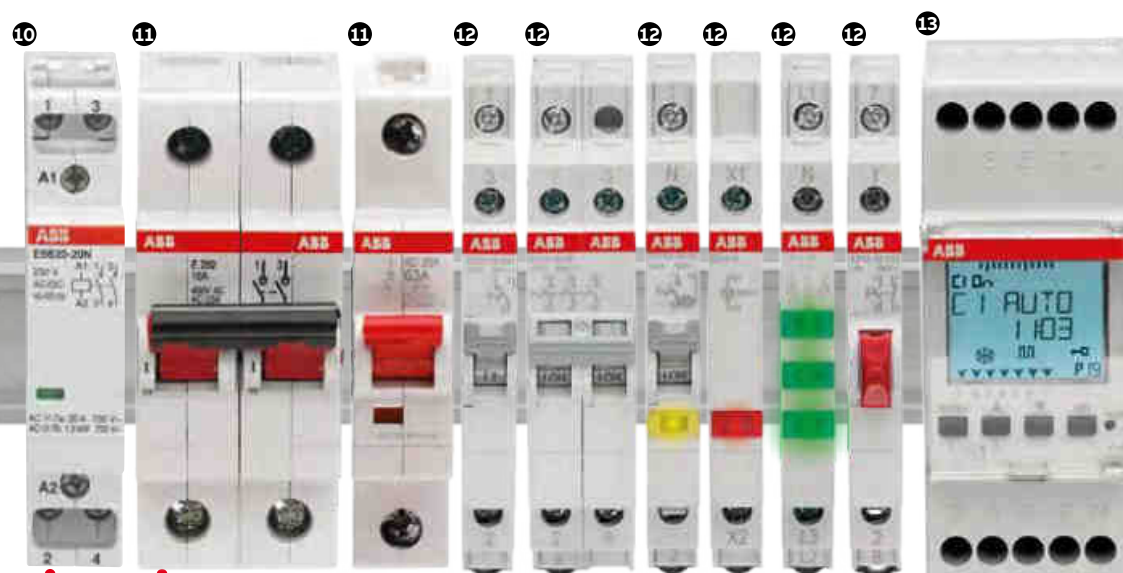

Currents up to 125 A.
From 1 to 4 poles.
Option to include an add-on of
up to 3 auxiliary contacts.

Hum-free operation.
Variety of control voltages.
Multiple combinations of NO and NC contacts.
Function modes selector:
Automatic/Connected/Disconnected (EN series).

Multiple command and control
functions in the ultra-compact
design (9 mm width) of the
E210 series.

Up to 3 E219 LED
indicator lights in
a width of just 9 mm.
LED indicators
guarantee an optimal
illumination with very
low consumption.

Electrical installation solutions for buildings

A world of advantages

14 TWA astronomical switches and TW twilight switches


TWA astronomical switches to activate lighting systems according to the rising and setting of the sun.
TW twilight switches to control lighting devices according to the level of the ambient light.

15 E234 series electronic timers and E232 series staircase switches

Wide range of E234.
E232 staircase timers for household applications.

16 CP-D primary switch mode power supplies

Optimized for world-wide applications with a wide AC and DC supply range and continuously adjustable output voltage. Additional redundancy unit CP-RUD available.

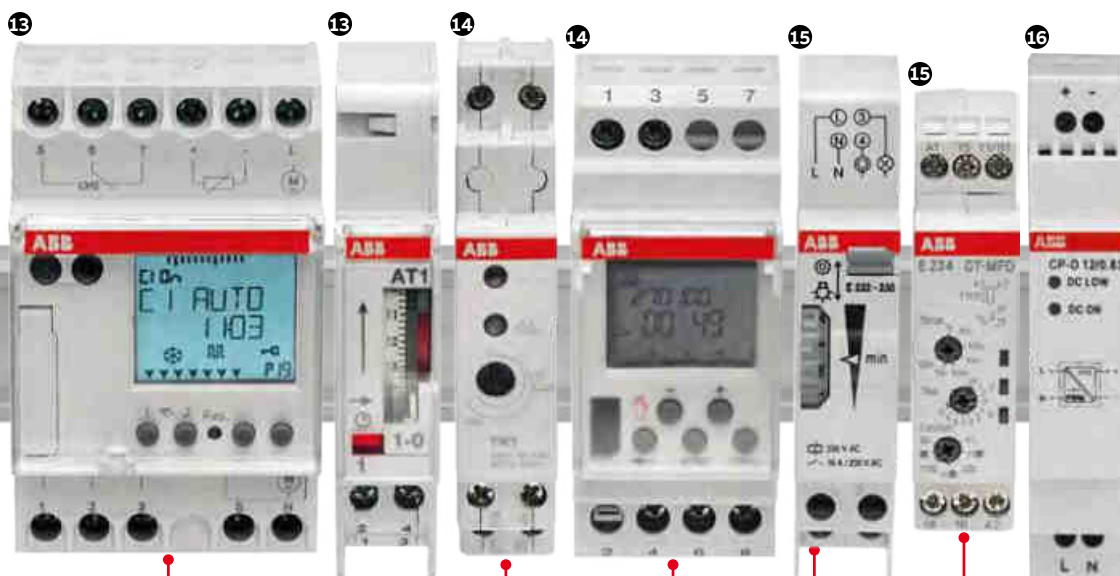


D-Line series weekly and annual digital time switches. Multiple communication options. Wide range of programs: standard, cyclic, casual and holiday. White backlit LCD display.

Easy to program. Ideal for public lighting, stores lighting, monuments, etc.

Connection and disconnection time delays. Continuous and impulse signals among multiple options.

Miniature Circuit Breaker SB200 M

The details make the difference

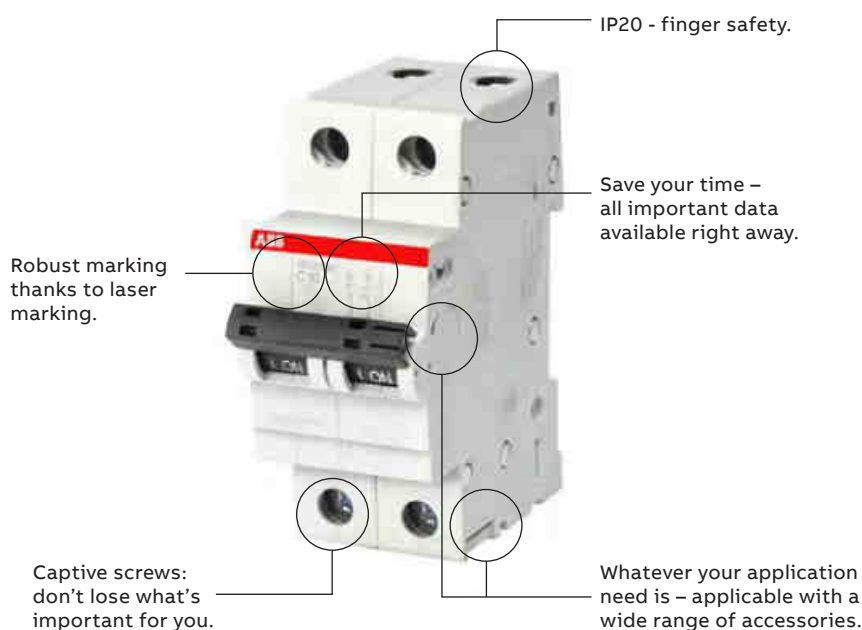

Technical Features

General data

Standards	IEC/IS 60898-1, IEC/IS 60947-2
Poles	B: 1P, 1P+N, 2P C: 1P, 2P, 3P, 4P, 1P+N, 3P+N D: 1P, 2P, 3P, 4P
Rated short-circuit capacity (Icn)	10 kA
Rated ultimate short-circuit breaking capacity Icu (acc.to IEC 60947-2)	15 kA
Tripping characteristics	B, C, D
Reference temperature for tripping characteristics	30°C
Energy limiting class (B-,C- Curve)	3
Rated voltage Ue	1P : 240/415 V AC 1P + N : 240 V AC 2...4P : 415 V AC 3P + N : 415 V AC
Rated current In	B: 6, 10, 16, 20, 25, 32, 40 A C&D: 0,5, 1, 1,6, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63 A
Rated frequency	50 Hz
Max. Power frequency recovery voltage (Umax)	1P: 264 V AC; 60V DC; 1P+N:264 V AC; 2...4P : 457 V AC; 2P: 120V DC; 3P+N: 457 V AC
Min. operating voltage	12 V AC
Rated insulation voltage Ui acc. to IEC/EN 60664-1	250 V AC (phase to ground) , 440 V AC (phase to phase)
Rated impulse withstand voltage Uimp. (1.2/50µs)	4 kV (test voltage 6.2kV at sea level, 5kV at 2.000m)
Dielectric test voltage	2 kV (50 / 60Hz, 1 min.)
Overvoltage category	III
Pollution degree	3
Electrical endurance	In < 32A: 20.000 ops.(AC), In ≥ 32A: 10.000 ops.(AC); 1.000 ops. (DC); 1 cycle (2s - ON, 13s - OFF, In ≤ 32A), 1 cycle (2s - ON, 28s - OFF, In >32A)

MCB SB200 M

B characteristic



SB201 M B 16

SB200 M B characteristic

Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

Applications: residential, commercial and industrial.

Standard: IEC/IS 60898-1, IEC/IS 60947-2

Icn=10 kA

SB201 M B

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
1P	6	SB201 M-B6	1SYS271012R0065 ■	12	310
	10	SB201 M-B10	1SYS271012R0105 ■	12	310
	16	SB201 M-B16	1SYS271012R0165 ■	12	310
	20	SB201 M-B20	1SYS271012R0205 ■	12	310
	25	SB201 M-B25	1SYS271012R0255 ■	12	310
	32	SB201 M-B32	1SYS271012R0325 ■	12	310
	40	SB201 M-B40	1SYS271012R0405 ■	12	615

SB201 M B NA

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
1P+N	6	SB201 M-B6 NA	1SYS271112R0065 ■	6	880
	10	SB201 M-B10 NA	1SYS271112R0105 ■	6	880
	16	SB201 M-B16 NA	1SYS271112R0165 ■	6	880
	20	SB201 M-B20 NA	1SYS271112R0205 ■	6	880
	25	SB201 M-B25 NA	1SYS271112R0255 ■	6	880
	32	SB201 M-B32 NA	1SYS271112R0325 ■	6	880
	40	SB201 M-B40 NA	1SYS271112R0405 ■	6	1,430

SB202 M B

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
2P	6	SB202 M-B6	1SYS272012R0065 ■	6	825
	10	SB202 M-B10	1SYS272012R0105 ■	6	825
	16	SB202 M-B16	1SYS272012R0165 ■	6	825
	20	SB202 M-B20	1SYS272012R0205 ■	6	825
	25	SB202 M-B25	1SYS272012R0255 ■	6	825
	32	SB202 M-B32	1SYS272012R0325 ■	6	825
	40	SB202 M-B40	1SYS272012R0405 ■	6	1,390

MCB SB200 M

C characteristic



SB201 M C 16

SB200 M C characteristic

Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

Applications: residential, commercial and industrial.

Standard: IEC/IS 60898-1, IEC/IS 60947-2

Icn=10 kA

SB201 M C

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
1P	0.5	SB201 M-C0.5	1SYS271012R0984	12	515
	1	SB201 M-C1	1SYS271012R0014	12	515
	1.6	SB201 M-C1.6	1SYS271012R0974	12	515
	2	SB201 M-C2	1SYS271012R0024	12	450
	3	SB201 M-C3	1SYS271012R0034	12	450
	4	SB201 M-C4	1SYS271012R0044	12	450
	6	SB201 M-C6	1SYS271012R0064 ■	12	310
	10	SB201 M-C10	1SYS271012R0104 ■	12	310
	16	SB201 M-C16	1SYS271012R0164 ■	12	310
	20	SB201 M-C20	1SYS271012R0204 ■	12	310
	25	SB201 M-C25	1SYS271012R0254 ■	12	310
	32	SB201 M-C32	1SYS271012R0324 ■	12	310
	40	SB201 M-C40	1SYS271012R0404	12	615
	50	SB201 M-C50	1SYS271012R0504	12	615
	63	SB201 M-C63	1SYS271012R0634	12	615

SB201 M C NA

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
1P+N	0.5	SB201 M-C0.5 NA	1SYS271112R0984	6	1,460
	1	SB201 M-C1 NA	1SYS271112R0014	6	1,460
	1.6	SB201 M-C1.6 NA	1SYS271112R0974	6	1,460
	2	SB201 M-C2 NA	1SYS271112R0024	6	1,270
	3	SB201 M-C3 NA	1SYS271112R0034	6	1,270
	4	SB201 M-C4 NA	1SYS271112R0044	6	1,270
	6	SB201 M-C6 NA	1SYS271112R0064 ■	6	880
	10	SB201 M-C10 NA	1SYS271112R0104 ■	6	880
	16	SB201 M-C16 NA	1SYS271112R0164 ■	6	880
	20	SB201 M-C20 NA	1SYS271112R0204 ■	6	880
	25	SB201 M-C25 NA	1SYS271112R0254 ■	6	880
	32	SB201 M-C32 NA	1SYS271112R0324 ■	6	880
	40	SB201 M-C40 NA	1SYS271112R0404 ■	6	1,430
	50	SB201 M-C50 NA	1SYS271112R0504 ■	6	1,430
	63	SB201 M-C63 NA	1SYS271112R0634 ■	6	1,430

■ Stock items

MCB SB200 M

C characteristic



SB202 M C 16

SB202 M C

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
2P	0.5	SB202 M-C0.5	1SYS272012R0984	6	1,355
	1	SB202 M-C1	1SYS272012R0014	6	1,355
	1.6	SB202 M-C1.6	1SYS272012R0974	6	1,355
	2	SB202 M-C2	1SYS272012R0024	6	1,225
	3	SB202 M-C3	1SYS272012R0034	6	1,225
	4	SB202 M-C4	1SYS272012R0044	6	1,225
	6	SB202 M-C6	1SYS272012R0064 ■	6	875
	10	SB202 M-C10	1SYS272012R0104 ■	6	875
	16	SB202 M-C16	1SYS272012R0164 ■	6	875
	20	SB202 M-C20	1SYS272012R0204 ■	6	875
	25	SB202 M-C25	1SYS272012R0254 ■	6	875
	32	SB202 M-C32	1SYS272012R0324 ■	6	875
	40	SB202 M-C40	1SYS272012R0404 ■	6	1,390
	50	SB202 M-C50	1SYS272012R0504 ■	6	1,390
	63	SB202 M-C63	1SYS272012R0634 ■	6	1,390

SB203 M C

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
3P	0.5	SB203 M-C0.5	1SYS273012R0984	4	2,010
	1	SB203 M-C1	1SYS273012R0014	4	2,010
	1.6	SB203 M-C1.6	1SYS273012R0974	4	2,010
	2	SB203 M-C2	1SYS273012R0024	4	1,840
	3	SB203 M-C3	1SYS273012R0034	4	1,840
	4	SB203 M-C4	1SYS273012R0044	4	1,840
	6	SB203 M-C6	1SYS273012R0064 ■	4	1,380
	10	SB203 M-C10	1SYS273012R0104 ■	4	1,380
	16	SB203 M-C16	1SYS273012R0164 ■	4	1,380
	20	SB203 M-C20	1SYS273012R0204 ■	4	1,380
	25	SB203 M-C25	1SYS273012R0254 ■	4	1,380
	32	SB203 M-C32	1SYS273012R0324 ■	4	1,380
	40	SB203 M-C40	1SYS273012R0404 ■	4	2,105
	50	SB203 M-C50	1SYS273012R0504 ■	4	2,105
	63	SB203 M-C63	1SYS273012R0634 ■	4	2,105

MCB SB200 M

C characteristic

SB203M C NA

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
3P+N	0.5	SB203 M-C0.5 NA	1SYS273112R0984	3	2,970
	1	SB203 M-C1 NA	1SYS273112R0014	3	2,970
	1.6	SB203 M-C1.6 NA	1SYS273112R0974	3	2,970
	2	SB203 M-C2 NA	1SYS273112R0024	3	2,605
	3	SB203 M-C3 NA	1SYS273112R0034	3	2,605
	4	SB203 M-C4 NA	1SYS273112R0044	3	2,605
	6	SB203 M-C6 NA	1SYS273112R0064 ■	3	1,880
	10	SB203 M-C10 NA	1SYS273112R0104 ■	3	1,880
	16	SB203 M-C16 NA	1SYS273112R0164 ■	3	1,880
	20	SB203 M-C20 NA	1SYS273112R0204 ■	3	1,880
	25	SB203 M-C25 NA	1SYS273112R0254 ■	3	1,880
	32	SB203 M-C32 NA	1SYS273112R0324 ■	3	1,880
	40	SB203 M-C40 NA	1SYS273112R0404 ■	3	2,655
	50	SB203 M-C50 NA	1SYS273112R0504 ■	3	2,655
	63	SB203 M-C63 NA	1SYS273112R0634 ■	3	2,655



SB204 M C 16

SB204 M C

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
4P	0.5	SB204 M-C0.5	1SYS274012R0984	3	2,820
	1	SB204 M-C1	1SYS274012R0014	3	2,820
	1.6	SB204 M-C1.6	1SYS274012R0974	3	2,820
	2	SB204 M-C2	1SYS274012R0024	3	2,460
	3	SB204 M-C3	1SYS274012R0034	3	2,460
	4	SB204 M-C4	1SYS274012R0044	3	2,460
	6	SB204 M-C6	1SYS274012R0064 ■	3	1,780
	10	SB204 M-C10	1SYS274012R0104 ■	3	1,780
	16	SB204 M-C16	1SYS274012R0164 ■	3	1,780
	20	SB204 M-C20	1SYS274012R0204 ■	3	1,780
	25	SB204 M-C25	1SYS274012R0254 ■	3	1,780
	32	SB204 M-C32	1SYS274012R0324 ■	3	1,780
	40	SB204 M-C40	1SYS274012R0404 ■	3	2,725
	50	SB204 M-C50	1SYS274012R0504 ■	3	2,725
	63	SB204 M-C63	1SYS274012R0634 ■	3	2,725

MCB SB200 M

D characteristic



SB202 M D 16

SB200 M D characteristic

Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

Applications: residential, commercial and industrial.

Standard: IEC/IS 60898-1, IEC/IS 60947-2

Icn=10 kA

SB201 M D

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
1P	0.5	SB201 M-D0,5	1SYS271012R0981	12	585
	1	SB201 M-D1	1SYS271012R0011	12	585
	1.6	SB201 M-D1,6	1SYS271012R0971	12	585
	2	SB201 M-D2	1SYS271012R0021	12	510
	3	SB201 M-D3	1SYS271012R0031	12	510
	4	SB201 M-D4	1SYS271012R0041	12	510
	6	SB201 M-D6	1SYS271012R0061	12	410
	10	SB201 M-D10	1SYS271012R0101	12	410
	16	SB201 M-D16	1SYS271012R0161	12	410
	20	SB201 M-D20	1SYS271012R0201	12	410
	25	SB201 M-D25	1SYS271012R0251	12	410
	32	SB201 M-D32	1SYS271012R0321	12	410
	40	SB201 M-D40	1SYS271012R0401	12	695
	50	SB201 M-D50	1SYS271012R0501	12	695
	63	SB201 M-D63	1SYS271012R0631	12	695

V

SB202 M D

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
2P	0.5	SB202 M-D0.5	1SYS272012R0981	6	1,605
	1	SB202 M-D1	1SYS272012R0011	6	1,605
	1.6	SB202 M-D1.6	1SYS272012R0971	6	1,605
	2	SB202 M-D2	1SYS272012R0021	6	1,400
	3	SB202 M-D3	1SYS272012R0031	6	1,400
	4	SB202 M-D4	1SYS272012R0041	6	1,400
	6	SB202 M-D6	1SYS272012R0061	6	1,000
	10	SB202 M-D10	1SYS272012R0101	6	1,000
	16	SB202 M-D16	1SYS272012R0161	6	1,000
	20	SB202 M-D20	1SYS272012R0201	6	1,000
	25	SB202 M-D25	1SYS272012R0251	6	1,000
	32	SB202 M-D32	1SYS272012R0321	6	1,000
	40	SB202 M-D40	1SYS272012R0401	6	1,645
	50	SB202 M-D50	1SYS272012R0501	6	1,645
	63	SB202 M-D63	1SYS272012R0631	6	1,645

MCB SB200 M

D characteristic



SB203 M D 16

SB203 M D

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
3P	0.5	SB203 M-D0.5	1SYS273012R0981	4	2,390
	1	SB203 M-D1	1SYS273012R0011	4	2,390
	1.6	SB203 M-D1.6	1SYS273012R0971	4	2,390
	2	SB203 M-D2	1SYS273012R0021	4	2,090
	3	SB203 M-D3	1SYS273012R0031	4	2,090
	4	SB203 M-D4	1SYS273012R0041	4	2,090
	6	SB203 M-D6	1SYS273012R0061	4	1,575
	10	SB203 M-D10	1SYS273012R0101	4	1,575
	16	SB203 M-D16	1SYS273012R0161	4	1,575
	20	SB203 M-D20	1SYS273012R0201	4	1,575
	25	SB203 M-D25	1SYS273012R0251	4	1,575
	32	SB203 M-D32	1SYS273012R0321	4	1,575
	40	SB203 M-D40	1SYS273012R0401	4	2,485
	50	SB203 M-D50	1SYS273012R0501	4	2,485
	63	SB203 M-D63	1SYS273012R0631	4	2,485

V

SB204 M D


Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
4P	0.5	SB204 M-D0.5	1SYS274012R0981	3	2,610
	1	SB204 M-D1	1SYS274012R0011	3	2,610
	1.6	SB204 M-D1.6	1SYS274012R0971	3	2,610
	2	SB204 M-D2	1SYS274012R0021	3	2,745
	3	SB204 M-D3	1SYS274012R0031	3	2,745
	4	SB204 M-D4	1SYS274012R0041	3	2,745
	6	SB204 M-D6	1SYS274012R0061	3	2,180
	10	SB204 M-D10	1SYS274012R0101	3	2,180
	16	SB204 M-D16	1SYS274012R0161	3	2,180
	20	SB204 M-D20	1SYS274012R0201	3	2,180
	25	SB204 M-D25	1SYS274012R0251	3	2,180
	32	SB204 M-D32	1SYS274012R0321	3	2,180
	40	SB204 M-D40	1SYS274012R0401	3	2,875
	50	SB204 M-D50	1SYS274012R0501	3	2,875
	63	SB204 M-D63	1SYS274012R0631	3	2,875

Miniature Circuit Breaker SB200 DC

Right product for right application

The range impresses with its performance, approvals and high in-built short-circuit breaking capacity for

DC application. Can be used in SP version at 250V DC and DP version upto 500V DC.

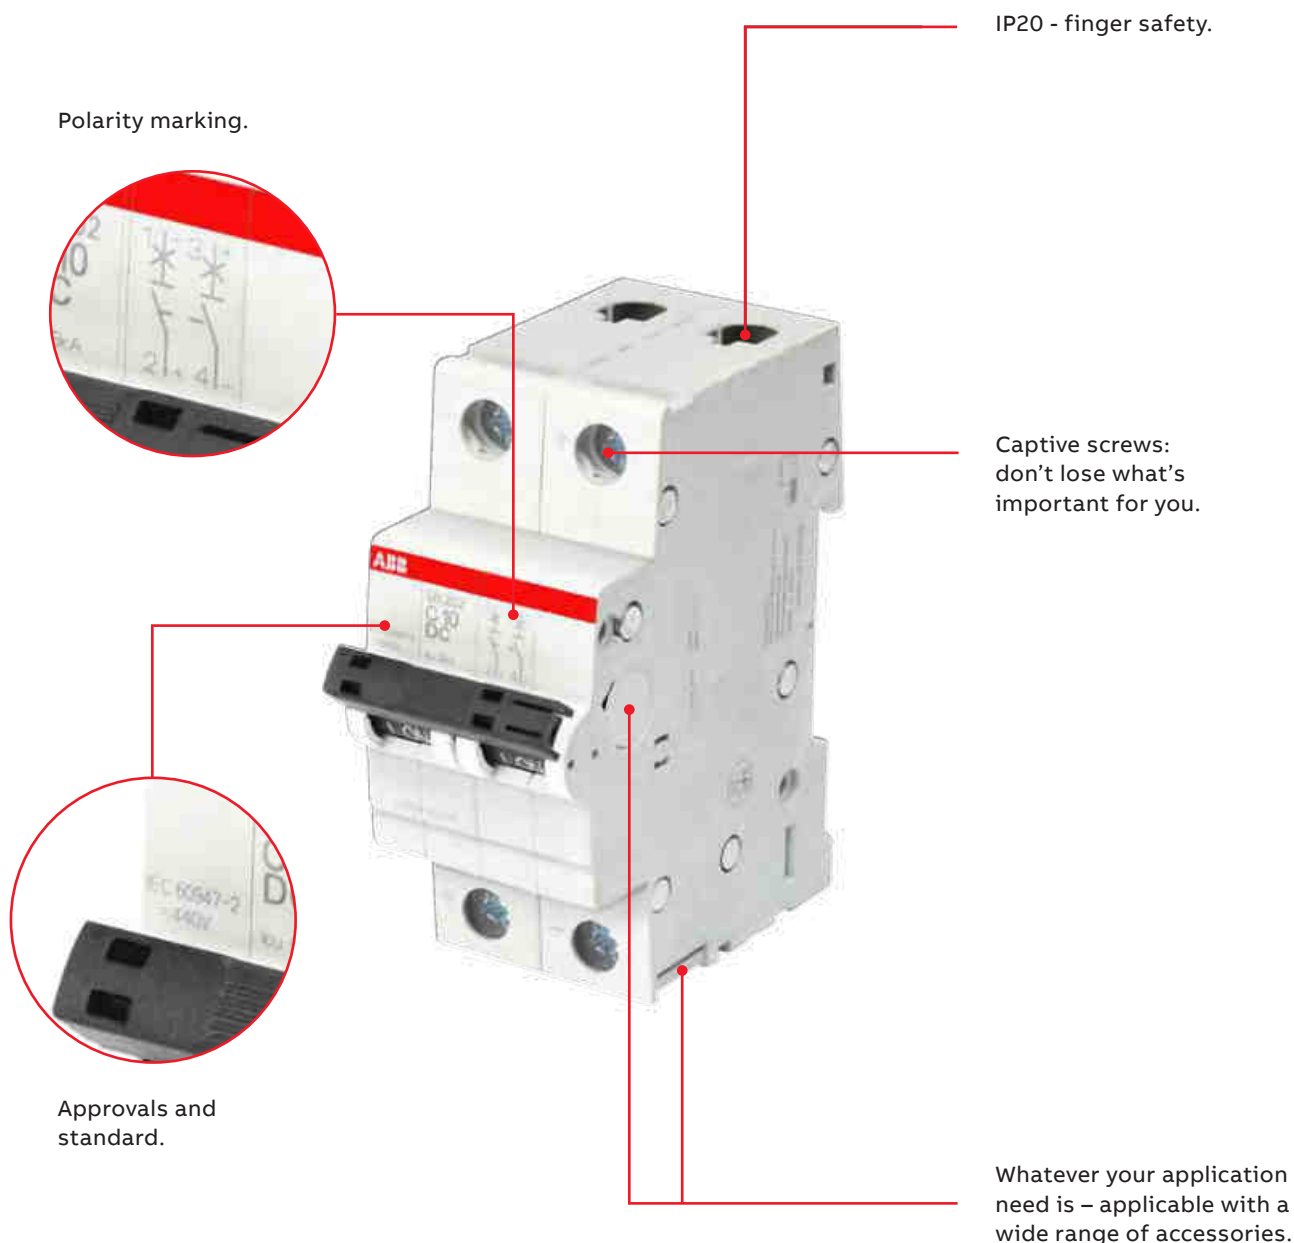



State-of-the-art design (Aesthetics & Ergonomics)

Elegant in appearance and the knob is designed for easy operation.



Laser marking

All printing of the SB200 MCBs, like the approvals on the product identification, are printed by a laser. The laser printing ensures a friction, scratch and solvent resistant marking on the MCBs. Easy identification of the products in case of maintenance or replacement, due to safe laser printing.



Housing cover with fire retardant material

High performance 100% recyclable plastic material with fire retardant, high melting point, low water absorption & high dielectric strength properties. ABB is taking care of the environment... with the latest generation of thermoplastics, it is possible to recycle the MCBs – especially the thermoplastic housing material can be re-used. SB200 is 100% free of halogens.



IP20 protection

IP20 - finger safe terminals. The System pro M compact® MCBs are equipped with 25 mm² cylinder lift twin terminals, a well-proven and reliable technology - designed for sophisticated industrial use. The cross wiring can easily be done by inserting the System pro M compact® busbars into the rear terminal part and then the incoming wires into the front part of the terminal.



Labelling area

Provision for providing label enables easy identification and polarity marking of circuit during installation, operation & maintenance.



Accessories mountable

Wide range of add-on accessories having 30 different types of accessories. Max. possibility of mounting: 4 different accessories on the right side and 1 on the left side ensures highest flexibility of functions. Universal contact, motorised unique accessory like mechanical tripping devices available only with ABB.

MCB SB200 DC

C characteristic



SB201 C 6 DC

SB200 DC characteristic

Function: protection and control of the circuits against overloads and short-circuits; protection for resistive and inductive loads with low inrush current.

Applications: residential, commercial and industrial.

Standard: IS/IEC 60947-2

Icn=6 kA

SB201 DC C

Number of poles	Rated current In A	Order details		Standard pack	L.P.(₹)
		Type code	Order code		
1P	1.6	SB201-C1.6DC	1SYS251067R0974	12	920
	2	SB201-C2DC	1SYS251067R0024	12	920
	3	SB201-C3DC	1SYS251067R0034	12	920
	4	SB201-C4DC	1SYS251067R0044	12	920
	6	SB201-C6DC	1SYS251067R0064	12	750
	10	SB201-C10DC	1SYS251067R0104	12	750
	16	SB201-C16DC	1SYS251067R0164	12	750
	20	SB201-C20DC	1SYS251067R0204	12	750
	25	SB201-C25DC	1SYS251067R0254	12	750
	32	SB201-C32DC	1SYS251067R0324	12	750
	40	SB201-C40DC	1SYS251067R0404	12	955
	50	SB201-C50DC	1SYS251067R0504	12	955
	63	SB201-C63DC	1SYS251067R0634	12	955



SB202 C 10 DC

SB202 DC

Number of poles	Rated current In A	Order details		Standard pack	L.P.(₹)
		Type code	Order code		
2P	1.6	SB202-C1.6DC	1SYS252067R0974	6	1,940
	2	SB202-C2DC	1SYS252067R0024	6	1,940
	3	SB202-C3DC	1SYS252067R0034	6	1,940
	4	SB202-C4DC	1SYS252067R0044	6	1,940
	6	SB202-C6DC	1SYS252067R0064	6	1,565
	10	SB202-C10DC	1SYS252067R0104	6	1,565
	16	SB202-C16DC	1SYS252067R0164	6	1,565
	20	SB202-C20DC	1SYS252067R0204	6	1,565
	25	SB202-C25DC	1SYS252067R0254	6	1,565
	32	SB202-C32DC	1SYS252067R0324	6	1,565
	40	SB202-C40DC	1SYS252067R0404	6	2,115
	50	SB202-C50DC	1SYS252067R0504	6	2,115
	63	SB202-C63DC	1SYS252067R0634	6	2,115



Miniature Circuit Breaker (MCB)

S200 series - 80, 100A



S201C

Features

- Breaking capacity - 6kA
- Tripping characteristics - C curve
- Suitable for -25..... +55 °C ambient temperatures
- Standards : Conforms to IEC60898, IEC60947-2

Description	Current rating (A)	Pack unit (Pc)	Ordering code	L.P.(₹)
Single pole				
S201-C80	80	1	2CDS251001R0804	2,840
S201-C100	100	1	2CDS251001R0824	3,320
Single pole & neutral				
S201-C80NA	80	1	2CDS251103R0804	5,935
S201-C100NA	100	1	2CDS251103R0824	7,085
Double pole				
S202-C80	80	1	2CDS252001R0804	5,565
S202-C100	100	1	2CDS252001R0824	6,425
Triple pole				
S203-C80	80	1	2CDS253001R0804	8,100
S203-C100	100	1	2CDS253001R0824	9,800
Triple pole & neutral				
S203-C80NA	80	1	2CDS253103R0804	12,175
S203-C100NA	100	1	2CDS253103R0824	14,515
Four pole				
S204-C80	80	1	2CDS254001R0804	11,375
S204-C100	100	1	2CDS254001R0824	12,300

High performance MCB

S800 series 80 to 125A



S801B C

Features

- Complies to standards IEC 60947-2 & EN 60898-1
- Compact size: One size up to 125A
- Compact performance:
Selective and back-up characteristics
- Does not let go: The interchangeable terminal adapter.
Cage terminals or ring lugs
- On the safe side: Operating status display.
- Simple and flexible: Accessories fitted by the customer
- Identical accessories for a broad range of applications

The S800 range

- S800S (50kA) upto 125A
- S800N (36kA) upto 125A
- S800C (25kA) upto 125A
- S800B (16kA) upto 125A
- S800PV-SP (upto 1500V DC & upto 125A)
- S800PV-M-H (upto 1500V DC & upto 125A)

S800B - 'C' Curve 16 kA as per IEC 60947-2

Single pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	L.P.(₹)
S801B-C32	32	1	2CCS811001R0324	2,825
S801B-C40	40	1	2CCS811001R0404	2,825
S801B-C50	50	1	2CCS811001R0504	2,970
S801B-C63	63	1	2CCS811001R0634	2,970
S801B-C80	80	1	2CCS811001R0804	3,465
S801B-C100	100	1	2CCS811001R0824	3,645
S801B-C125	125	1	2CCS811001R0844	3,830

Double pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	L.P.(₹)
S802B-C32	32	1	2CCS812001R0324	5,935
S802B-C40	40	1	2CCS812001R0404	5,935
S802B-C50	50	1	2CCS812001R0504	6,230
S802B-C63	63	1	2CCS812001R0634	6,230
S802B-C80	80	1	2CCS812001R0804	7,170
S802B-C100	100	1	2CCS812001R0824	7,665
S802B-C125	125	1	2CCS812001R0844	8,035

Triple pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	L.P.(₹)
S803B-C32	32	1	2CCS813001R0324	9,025
S803B-C40	40	1	2CCS813001R0404	9,025
S803B-C50	50	1	2CCS813001R0504	9,495
S803B-C63	63	1	2CCS813001R0634	9,495
S803B-C80	80	1	2CCS813001R0804	11,080
S803B-C100	100	1	2CCS813001R0824	11,670
S803B-C125	125	1	2CCS813001R0844	12,265

Four pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	L.P.(₹)
S804B-C32	32	1	2CCS814001R0324	12,145
S804B-C40	40	1	2CCS814001R0404	12,145
S804B-C50	50	1	2CCS814001R0504	12,760
S804B-C63	63	1	2CCS814001R0634	12,760
S804B-C80	80	1	2CCS814001R0804	14,885
S804B-C100	100	1	2CCS814001R0824	15,675
S804B-C125	125	1	2CCS814001R0844	16,480

Switch Disconnecter SDB200

The details make the difference

Easy product coding – easy identification: basic technical information already integrated into the name.



IP20 - finger safety.

Fully compatible with all System pro M devices and accessories.

Patented housing design: Environment-friendly and performance-optimized.



Patented housing design

By using state-of-the-art housing material, ABB is taking care of the environment. With the latest generation of halogen-free thermoplastics for SDB200, it is possible to recycle the switch disconnectors completely without environmental pollution. The material works for the stability.



Highest performance

With a rated voltage of 253/440 V AC, a rated conditional short-circuit current of 25 kA, terminals with protection from misconnection, a "Real CPI" switching position display, as well as full compatibility with all MCB accessories, the SDB200 is unique in its field of application. SDB200 complies with IEC/EN 60947-3.



IP20 protection

IP20 - finger safe terminals. The System pro M compact® MCBs are equipped with 25 mm² cylinder lift twin terminals, a well-proven and reliable technology - designed for sophisticated industrial use. The cross wiring can be easily done by inserting the System pro M compact® busbars into the rear terminal part and then the incoming wires into the front part of the terminal.



Laser printing

All labels on the SDB200, as the approvals on the dome, technical details and the product identification, are printed by a laser. The laser printing ensures a friction, scratch and solvent resistant marking on the switch disconnectors for easy identification in case of maintenance or replacement. For control and acceptance procedure, it is important to see all markings also in the mounted position.



ISI and CE marking

In addition to the International standards and markings IEC, the product is certified as per latest Indian Standards (ISI)



Wide range of accessories

SDB200 is fully compatible to the complete range of System pro M compact accessories like:

- Auxiliary contacts, to be mounted on the left side, the right side or bottom fitting
- Shunt trips
- Undervoltage release
- Motor operating devices



Switch Disconnecter

SDB200



SDB203 16 A

SDB202					
Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
2P	40	SDB202/40	1SYD272115R0040 ■	6	690
	63	SDB202/63	1SYD272115R0063 ■	6	905

SDB203					
Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
3P	40	SDB203/40	1SYD273115R0040 ■	4	1,175
	63	SDB203/63	1SYD273115R0063 ■	4	1,370

SDB204					
Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
4P	40	SDB204/40	1SYD274115R0040 ■	3	1,465
	63	SDB204/63	1SYD274115R0063 ■	3	1,615

Note: Standard packing quantity for SDB switch Disconnecter: DP-6 Nos, TP-4 Nos, FP-3 Nos.



E200



E201

E200					
Number of poles	Rated current In A	Order details		Standard pack	Unit L.P. ₹
		Type code	Order code		
Double pole					
2P	80	E202/80r	2CDE282001R0080	1	1,110
	100	E202/100r	2CDE282001R0100	1	1,750
	125	E202/125r	2CDE282001R0125	1	1,810
Triple pole					
3P	80	E203/80r	2CDE283001R0080	1	1,865
	100	E203/100r	2CDE283001R0100	1	2,045
	125	E203/125r	2CDE283001R0125	1	2,285
Four pole					
4P	80	E204/80r	2CDE284001R0080	1	2,100
	100	E204/100r	2CDE284001R0100	1	2,230
	125	E204/125r	2CDE284001R0125	1	2,485



Change over switch



E213

Description	Ordering code	L.P. (₹)
E213-16-002, double pole change over switch, 16 A (I-II)	2CCA703045R0001	2,535
E213-25-002, double pole change over switch, 25 A (I-II)	2CCA703046R0001	3,155
E214-16-202, group switch, 16 A (I-O-II)	2CCA703030R0001	2,860
E214-25-202, group switch, 25 A (I-O-II)	2CCA703031R0001	3,195

■ Stock items

Residual Current Circuit Breaker FB200

A range designed to ensure efficiency and protection





ISI and CE marking

In addition to the international standards and markings IEC, the product is certified as per latest Indian Standards (ISI).



High performance

- Rated breaking capacity and rated residual breaking capacity laser printed on the device:
 $I_m = I_{\Delta m} = 1000 \text{ mA}$
- Co-ordination with a 63 A rated current with conditional short-circuit capacity $I_{nc} = 10000 \text{ A}$.



Accessories mountable

Wide range of add-on accessories having 30 different types of accessories. Max. possibility of mounting: 4 different accessories on the right side and 1 on the left side ensures highest flexibility of functions. Universal contact, motorised unique accessory like mechanical tripping devices available only with ABB.



Termination

The availability of two terminals offers different connection solutions, thanks to the possibility to connect two independent cables in the same device: the second terminal can be used for an auxiliary circuit or for the supply of devices with small section cables without connecting them together with the main circuit.



Auto reclosing

The FB200 can be coupled with the auto reclosing unit F2C-ARH in order to ensure continuity of service for the whole installation of your home, avoiding lack of supply.



Dual termination

Two terminals are available, the fore one for cables up to 25 mm^2 , the back one for cables up to 10 mm^2 or for busbars.

RCCB FB200 and F200 higher rating

AC  type

FB200 AC and F200 type function: protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct contacts (with $I_{\Delta n}=30$ mA).

Application: residential, commercial, industrial.

Standard: IEC/EN 61008-1; IEC/EN 61008-2-1

Marking: according to EN 61008-1; EN 61008-2-1



FB202 AC

FB202 AC

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
2P	25	FB202 AC-25/0.03	1SYF202015R1250 ■	1	3,095
	25	FB202 AC-25/0.1	1SYF202015R2250 ■	1	3,235
	25	FB202 AC-25/0.3	1SYF202015R3250	1	3,260
	40	FB202 AC-40/0.03	1SYF202015R1400 ■	1	3,545
	40	FB202 AC-40/0.1	1SYF202015R2400 ■	1	3,715
	40	FB202 AC-40/0.3	1SYF202015R3400	1	3,820
	63	FB202 AC-63/0.03	1SYF202015R1630 ■	1	4,190
	63	FB202 AC-63/0.1	1SYF202015R2630 ■	1	4,335
	63	FB202 AC-63/0.3	1SYF202015R3630	1	4,410

F202 AC

Number of poles	Rated current In A	Order details		Standard pack	Unit L.P. ₹
		Type code	Order code		
2P	80	F202 AC-80/0,03	2CSF202005R1800	1	10,900
	80	F202 AC-80/0,1	2CSF202005R2800	1	10,810
	80	F202 AC-80/0,3	2CSF202005R3800	1	10,810
	100	F202 AC-100/0,03	2CSF202005R1900	1	9,765
	100	F202 AC-100/0,1	2CSF202005R2900	1	10,220
	100	F202 AC-100/0,3	2CSF202005R3900	1	11,075

FB204 and F204 AC

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
4P	25	FB204 AC-25/0.03	1SYF204015R1250	1	4,110
	25	FB204 AC-25/0.1	1SYF204015R2250	1	4,300
	25	FB204 AC-25/0.3	1SYF204015R3250	1	4,465
	40	FB204 AC-40/0.03	1SYF204015R1400 n	1	4,190
	40	FB204 AC-40/0.1	1SYF204015R2400 n	1	4,220
	40	FB204 AC-40/0.3	1SYF204015R3400 n	1	4,495
	63	FB204 AC-63/0.03	1SYF204015R1630 n	1	4,750
	63	FB204 AC-63/0.1	1SYF204015R2630 n	1	5,095
	63	FB204 AC-63/0.3	1SYF204015R3630 n	1	5,145

F204 AC

Number of poles	Rated current In A	Order details		Standard pack	Unit MRP ₹
		Type code	Order code		
4P	80	F204 AC-80/0,03	2CSF204005R1800	1	11,560
	80	F204 AC-80/0,1	2CSF204005R2800	1	12,080
	80	F204 AC-80/0,3	2CSF204005R3800	1	12,205
	100	F204 AC-100/0,03	2CSF204005R1900	1	11,750
	100	F204 AC-100/0,1	2CSF204005R2900	1	13,070
	100	F204 AC-100/0,3	2CSF204005R3900	1	12,745
	125	F204 AC-125/0,03	2CSF204001R1950	1	Upon request
	125	F204 AC-125/0,1	2CSF204001R2950	1	
	125	F204 AC-125/0,3	2CSF204001R3950	1	

■ Stock items



Residual current circuit breaker with overcurrent protection

RCBO - DS200M series



DS201M 1P+N

Features

- Complies to standard to IEC/EN 61009
- DS201 available in 4.5kA,6kA & 10kA breaking capacity
- Available in AC, A and APR types to meet all protection needs
- B and C characteristics with rated current up to 40 A available on all the versions
- Contact position indicator (CPI) to indicate the exact information of the circuit-breaker status
- Equipped with an RFID tag according to standard ISO/IEC FCD 15693-3 to authenticate the product
- Bi-directional cylinder-lift terminals for easier parallel feed
- Flag indicators - Differential trip indicator - blue
- Contact position indicator - green / red

RCBO 10kA AC Type - DS200M

Description	Current rating (A)	Residual rated current (mA)	Pack unit (Pc)	Ordering code	L.P. (₹)
DS201 M C6 AC30	6	30	1	2CSR275080R1064	4,615
DS201 M C10 AC30	10	30	1	2CSR275080R1104	4,615
DS201 M C16 AC30	16	30	1	2CSR275080R1164	4,615
DS201 M C20 AC30	20	30	1	2CSR275080R1204	4,615
DS201 M C25 AC30	25	30	1	2CSR275080R1254 ■	4,615
DS201 M C32 AC30	32	30	1	2CSR275080R1324	5,015
DS201 M C40 AC30	40	30	1	2CSR275080R1404 ■	5,945
DS201 M C6 AC100	6	100	1	2CSR275080R2064	5,190
DS201 M C10 AC100	10	100	1	2CSR275080R2104	5,190
DS201 M C16 AC100	16	100	1	2CSR275080R2164	5,190
DS201 M C20 AC100	20	100	1	2CSR275080R2204	5,190
DS201 M C25 AC100	25	100	1	2CSR275080R2254 ■	5,190
DS201 M C32 AC100	32	100	1	2CSR275080R2324	5,365
DS201 M C40 AC100	40	100	1	2CSR275080R2404 ■	6,300
DS201 M C6 AC300	6	300	1	2CSR275080R3064	5,015
DS201 M C10 AC300	10	300	1	2CSR275080R3104	5,015
DS201 M C16 AC300	16	300	1	2CSR275080R3164	5,015
DS201 M C20 AC300	20	300	1	2CSR275080R3204	5,015
DS201 M C25 AC300	25	300	1	2CSR275080R3254	5,015
DS201 M C32 AC300	32	300	1	2CSR275080R3324	5,190
DS201 M C40 AC300	40	300	1	2CSR275080R3404	6,125

Residual current circuit breaker with overcurrent protection

RCD blocks - DDA200 + S200 M series (RCBO combinations)



DDA - 200 AC type

Function: RCD-block for assembly on site with MCBs S 200M series. Protection against the effects of sinusoidal alternating earth fault currents; protection against indirect contacts and additional protection against direct (with $I_{\Delta n}=30$ mA) contacts.


Standard: IEC/EN 61009 Ann. G

DDA 200 AC

Two pole

Description	Current rating (A)	Residual rated current (mA)	Pack unit (Pc)	Ordering code	L.P. (₹)
DDA202 AC-63/0.03*	63	30	1	2CSB202001R1630 ■	3,730
DDA202 AC-63/0.1*	63	100	1	2CSB202001R2630 ■	4,535
DDA202 AC-63/0.3*	63	300	1	2CSB202001R3630	4,555



* Consider S200 M double pole MCBs.



Four pole

Description	Current rating (A)	Residual rated current (mA)	Pack unit (Pc)	Ordering code	L.P. (₹)
DDA204 AC-25/0.03	25	30	1	2CSB204001R1250	3,495
DDA204 AC-40/0.03	40	30	1	2CSB204001R1400 ■	3,630
DDA204 AC-63/0.03	63	30	1	2CSB204001R1630 ■	3,835
DDA204 AC-25/0.1	25	100	1	2CSB204001R2250	3,890
DDA204 AC-40/0.1	40	100	1	2CSB204001R2400 ■	4,130
DDA204 AC-63/0.1	63	100	1	2CSB204001R2630 ■	4,940
DDA204 AC-25/0.3	25	300	1	2CSB204001R3250	3,990
DDA204 AC-40/0.3	40	300	1	2CSB204001R3400 ■	4,285
DDA204 AC-63/0.3	63	300	1	2CSB204001R3630 ■	5,015


* Consider S200 M four pole MCBs.

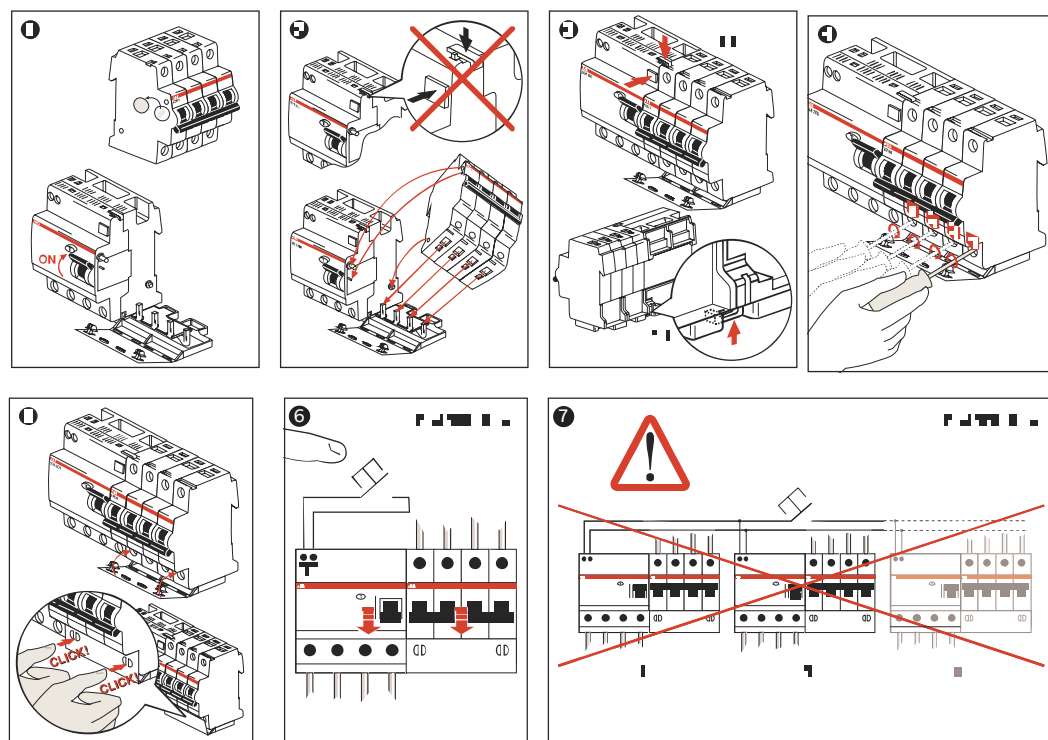

■ Stock items

Miniature circuit breaker (MCB)

S200M series

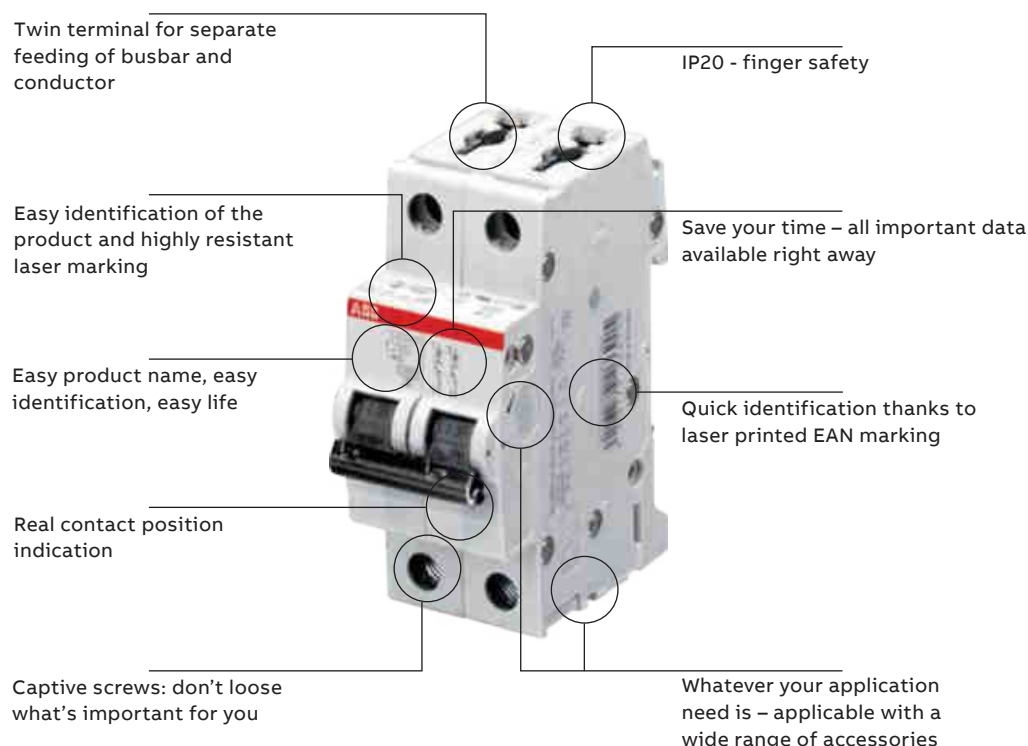

Technical features

Electrical data	S200 M	
Standards	IEC 60947-2, IS/IEC-60898-1	
Poles	1P, 2P, 3P, 4P, 1P + N, 3P + N	
Tripping characteristics	B, C, D	
Rated current	0.5A - 63 A	
Rated voltage	1P : 230 / 400 V AC	1P : 60 V DC
	1P + N : 230 V AC	2P : 120 V DC
	2...4P : 400 V AC	
	3P + N : 400 V AC	
Insulation voltage	250 V AC (Phase to ground)	
	500 V AC (Phase to phase)	
Max operating voltage	1P: 253 V AC 2...4P : 440 V AC	
Min operating voltage	12 V AC	
Rated frequency	50/60 Hz	
Rated short circuit capacity	10kA	
Energy limiting class (B, C upto 40 A)	3	
Over voltage category	III	
Pollution degree	3	
Rated impulse withstand voltage	4kV (Test Voltage 6.2kV at Sea Level, 5kV at 2,000 m)	
Dielectric test voltage	2kV (50/60 Hz, 1 min)	
Accessories mountable	Yes	
Cross-section of conductor (top / bottom)	35 mm ²	
Terminal	Fail safe bi-directional cylinder - lift terminal	
Contact position indication	Marking on toggle (1 ON / 0 OFF), Real CPI (red ON / green OFF)	
Real contact position indication	Red ON / green OFF	

S200M - MCBs, C characteristics - 10 kA



S202M-C

Double pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	Unit MRP (₹)
S202M-C 6	6	6	2CDS272001R0064 ■	1,070
S202M-C 10	10	6	2CDS272001R0104 ■	
S202M-C 16	16	6	2CDS272001R0164 ■	
S202M-C 20	20	6	2CDS272001R0204 ■	
S202M-C 25	25	6	2CDS272001R0254 ■	
S202M-C 32	32	6	2CDS272001R0324 ■	1,660
S202M-C 40	40	6	2CDS272001R0404 ■	
S202M-C 50	50	6	2CDS272001R0504 ■	
S202M-C 63	63	6	2CDS272001R0634 ■	

Note: Standard packing quantity for MCBs: SP - 12 Nos, SPN/DP - 6 Nos, TP - 4 Nos, TPN/FP - 3 Nos.



S204M-C

Four pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	Unit MRP (₹)
S204M-C 6	6	3	2CDS274001R0064 ■	2,130
S204M-C 10	10	3	2CDS274001R0104 ■	
S204M-C 16	16	3	2CDS274001R0164 ■	
S204M-C 20	20	3	2CDS274001R0204 ■	
S204M-C 25	25	3	2CDS274001R0254 ■	
S204M-C 32	32	3	2CDS274001R0324 ■	3,195
S204M-C 40	40	3	2CDS274001R0404 ■	
S204M-C 50	50	3	2CDS274001R0504 ■	
S204M-C 63	63	3	2CDS274001R0634 ■	

Note: Standard packing quantity for MCBs: SP - 12 Nos, SPN/DP - 6 Nos, TP - 4 Nos, TPN/FP - 3 Nos.

S200M - MCBs, D characteristics - 10 kA



S202M-D

Double pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	Unit MRP (₹)
S202M-D 6	6	6	2CDS272001R0061	1,105
S202M-D 10	10	6	2CDS272001R0101	
S202M-D 16	16	6	2CDS272001R0161	
S202M-D 20	20	6	2CDS272001R0201	
S202M-D 25	25	6	2CDS272001R0251	
S202M-D 32	32	6	2CDS272001R0321	1,920
S202M-D 40	40	6	2CDS272001R0401	
S202M-D 50	50	6	2CDS272001R0501	
S202M-D 63	63	6	2CDS272001R0631	

Note: Standard packing quantity for MCBs: SP - 12 Nos, SPN/DP - 6 Nos, TP - 4 Nos, TPN/FP - 3 Nos.



S204M-D

Four pole

Description	Current rating (A)	Pack unit (Pc)	Ordering code	Unit MRP (₹)
S204M-D 6	6	3	2CDS274001R0061	2,445
S204M-D 10	10	3	2CDS274001R0101	
S204M-D 16	16	3	2CDS274001R0161	
S204M-D 20	20	3	2CDS274001R0201	
S204M-D 25	25	3	2CDS274001R0251	
S204M-D 32	32	3	2CDS274001R0321	3,640
S204M-D 40	40	3	2CDS274001R0401	
S204M-D 50	50	3	2CDS274001R0501	
S204M-D 63	63	3	2CDS274001R0631	

Note: Standard packing quantity for MCBs: SP - 12 Nos, SPN/DP - 6 Nos, TP - 4 Nos, TPN/FP - 3 Nos.

Solution for unwanted tripping - AP-R type (high immunity) RCCB / RCBO

The ABB range of AP-R anti-disturbance residual current circuit-breakers and blocks was designed to overcome the problem of unwanted tripping due to overvoltages of atmospheric or operation origin.

The electronic circuit in these devices can distinguish between temporary leakage caused by disturbances on the mains and permanent leakage due to actual faults, only breaking the circuit in the latter case.

AP-R residual current circuit-breakers and blocks have a slight delay into the tripping time, but this does not compromise the safety limits set by the Standards in force (release time at $2 I_{\Delta n}=150$ ms).

Compared with standard type breakers, AP-R residual current breakers are therefore characterised, for any given sensibility, by:

- Higher residual trip current
- Tripping time delay
- Better resistance to overvoltages, harmonics and impulse disturbances

Guaranteeing conventional residual current protection, their installation in the electrical circuit therefore allows any unwanted tripping to be avoided in domestic and industrial systems in which service continuity is essential.

This delay makes the AP-R residual current devices especially suited for installations involving motor starters/variable speed drives, fluorescent lamps or IT/electronic equipment.


The use of multiple electronic reactors for the supply of fluorescent lamps instead generates permanent leakage currents and inrush currents that can cause nuisance tripping of a standard residual current circuit breaker.

IT system loads and other electronic equipment (e.g. dimmers, computers, inverters) with capacitive input filters connected between the phases and ground can also generate permanent earth leakage currents whose sum may provoke the nuisance tripping of a standard residual current circuit breaker. For these situations, the AP-R breakers allow a greater number of devices to be connected to the installation.

Frequency converters include a rectifier section and an inverter section.

In case of fault within a single-phase frequency converter AP-R type RCDs provide complete protection, because an earth fault occurring downstream the inverter, produces an earth fault current with multi-frequency shape with high amount of harmonics.


While, in case of fault within a three-phase frequency converter, B type RCDs ensure complete protection because in case of insulation fault between the rectifier and the inverter or downstream the inverter we can have a smooth DC earth fault current.

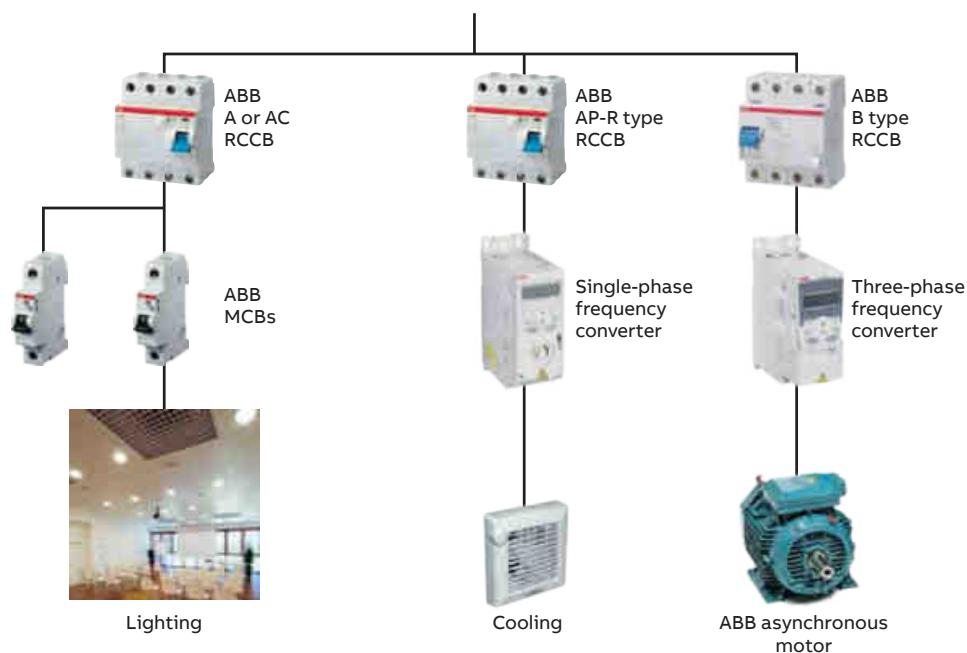


RCCB - F200 series: AP-R (high immunity)



F202A



F204A



Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing the best compromise between safety and continuity in the service, thanks to the resistance to unwanted trippings; protection against indirect contacts and additional protection against direct ($I_{\Delta n}=30$ mA) contacts.

Application: residential, commercial, industrial Standard: IEC/EN 61008

Surge current resistance (wave 8/20)=3000 A Marking: according to EN 61008

RCCB - F200 series

Description	Current rating (A)	Residual rated current (mA)	Packing	Ordering code	L.P. (₹)
Two pole					
F202 A-25/0.03 AP-R	25	30	1	2CSF202401R1250	6,975
F202 A-40/0.03 AP-R	40	30	1	2CSF202401R1400	7,340
F202 A-63/0.03 AP-R	63	30	1	2CSF202401R1630	8,860
F202 A-80/0.03 AP-R	80	30	1	2CSF202401R1800	12,280
F202 A-100/0.03 AP-R	100	30	1	2CSF202401R1900	13,750

Four pole

F204 A-25/0.03 AP-R	25	30	1	2CSF204401R1250	8,575
F204 A-40/0.03 AP-R	40	30	1	2CSF204401R1400	8,820
F204 A-63/0.03 AP-R	63	30	1	2CSF204401R1630	10,005
F204 A-80/0.03 AP-R	80	30	1	2CSF204401R1800	15,020
F204 A-100/0.03 AP-R	100	30	1	2CSF204401R1900	16,550
F204 A-125/0.03 AP-R	125	30	1	2CSF204401R1950	Upon Request

RCBO - DS200 series APR type (high immunity)


Function: protection against the effects of sinusoidal alternating and direct pulsating earth fault currents, providing an optimal compromise between safety and continuity of service, thanks to the resistance to unwanted tripping; protection against indirect contact and additional protection against direct ($I_{\Delta n}=30$ mA) contact; protection and isolation of resistive and inductive loads.

Application: residential, commercial, industrial Standard: IEC/EN 61009

$I_{cn}=10$ kA



DS201M APR-1P+N



RCBO - DS200 series APR type

Description	Current rating (A)	Residual rated current (mA)	Packing	Ordering code	L.P. (₹)
DS201 M C6 APR30	6	30	1	2CSR275480R1064	7,960
DS201 M C10 APR30	10	30	1	2CSR275480R1104	7,960
DS201 M C16 APR30	16	30	1	2CSR275480R1164	7,960
DS201 M C20 APR30	20	30	1	2CSR275480R1204	7,960
DS201 M C25 APR30	25	30	1	2CSR275480R1254	7,960
DS201 M C32 APR30	32	30	1	2CSR275480R1324	8,230
DS201 M C40 APR30	40	30	1	2CSR275480R1404	8,400
DS201 M C6 APR100	6	100	1	2CSR275480R2064	10,050
DS201 M C10 APR100	10	100	1	2CSR275480R2104	10,050
DS201 M C16 APR100	16	100	1	2CSR275480R2164	10,050
DS201 M C20 APR100	20	100	1	2CSR275480R2204	10,050
DS201 M C25 APR100	25	100	1	2CSR275480R2254	10,050
DS201 M C32 APR100	32	100	1	2CSR275480R2324	11,340
DS201 M C40 APR100	40	100	1	2CSR275480R2404	11,570
DS201 M C6 APR300	6	300	1	2CSR275480R3064	9,850
DS201 M C10 APR300	10	300	1	2CSR275480R3104	9,850
DS201 M C16 APR300	16	300	1	2CSR275480R3164	9,850
DS201 M C20 APR300	20	300	1	2CSR275480R3204	9,850
DS201 M C25 APR300	25	300	1	2CSR275480R3254	9,850
DS201 M C32 APR300	32	300	1	2CSR275480R3324	11,120
DS201 M C40 APR300	40	300	1	2CSR275480R3404	11,340

System pro M

Accessories SB200 M, S200 M, FB200 M, F200 M, SDB200, DS200 and DDA200



Thanks to the variety of control and monitoring accessories which enable you to build different monitoring control logics of the protection devices.



— S2C-H6...
Auxiliary contact



— S2C-S/H6R
Signal/auxiliary contacts



— S2C-A
Shunt trip



— S2C-UA
Under voltage release



— S2C-OVP
Over voltage release




— S2C-CM4
Motor operating device



— S2C-BP
Mechanical tripping device

System pro M

Accessories for SB200 M/SB200 DC/SDB200/S200 M

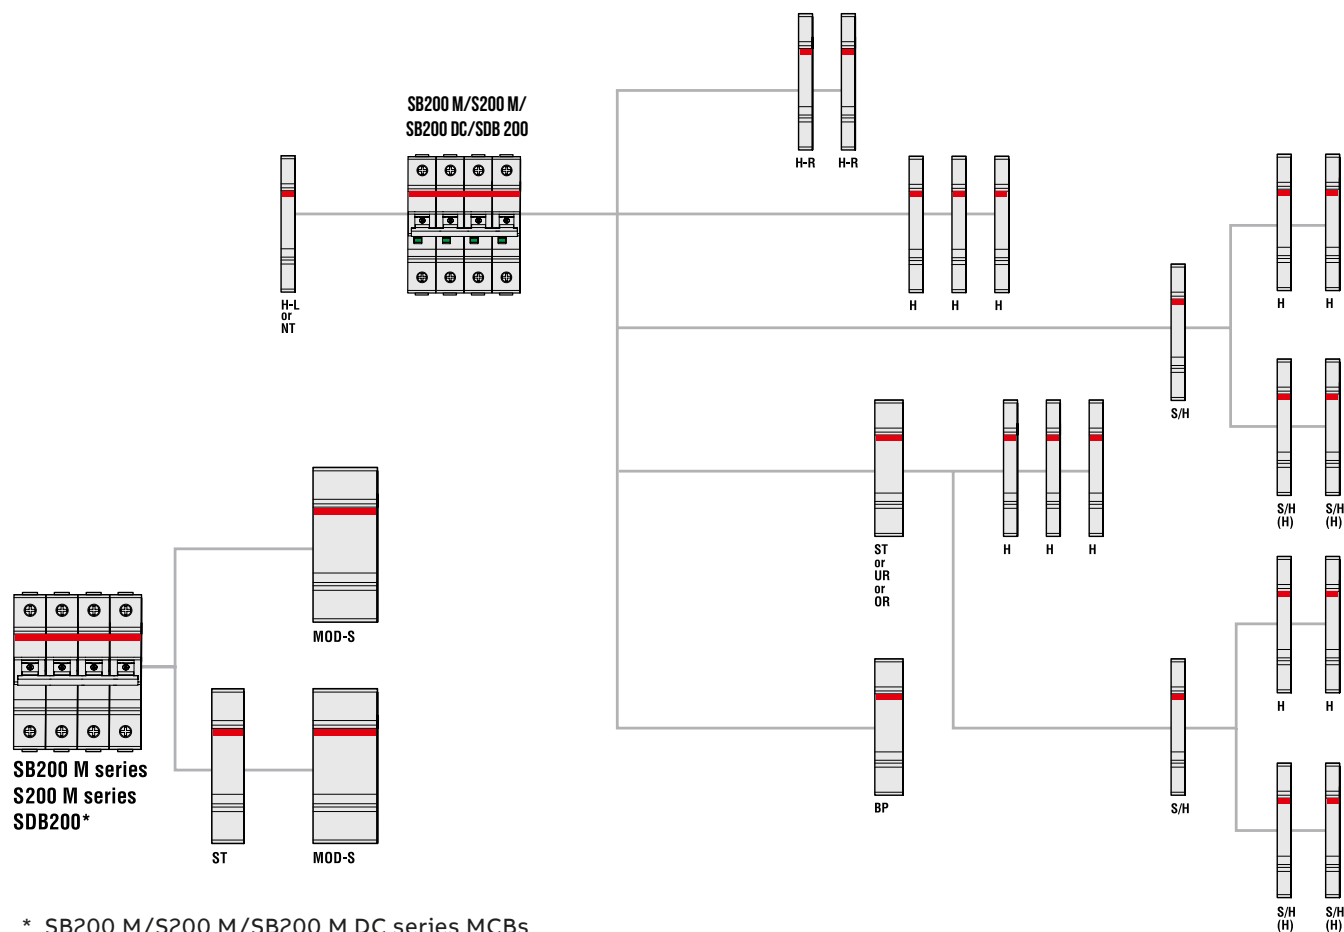


* SB200 M/S200 M/SB200 M DC series MCBs and SDB200 switch disconnectors up to 3P or 2P+ST can be coupled with MOD-S

H	Auxiliary contact	S2C-H6R
H-R	Auxiliary contact	S2C-H6-...R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
ST	Shunt trip for SB200 MCB	S2C-A...
UR	Undervoltage release	S2C-UA
OR	Overvoltage release	S2C-OVP
ST-L	Shunt trip for SB200 MCBs to be mounted on the left	S2C-A...L
H-L	Auxiliary contact for SB200 MCBs to be mounted on the left	S2C-H...L
BP	Mechanical tripping device	S2C-BP
NT	Switched neutral	S2C-Nt

System pro M

Accessories for FB200 and F200 M

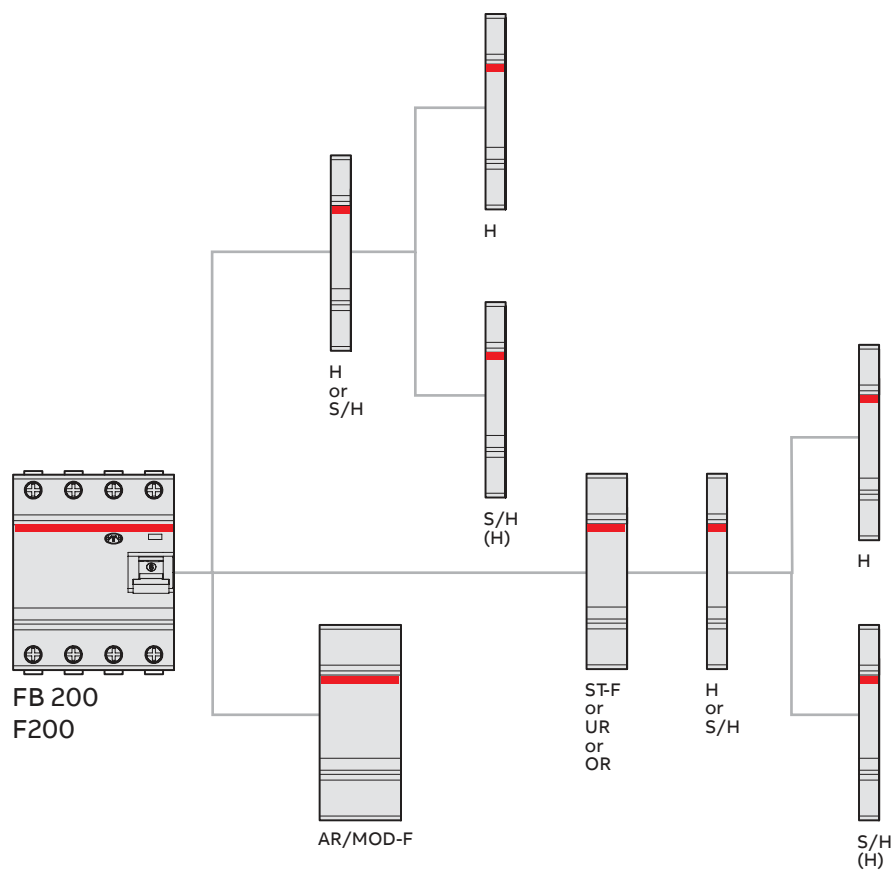


H	Auxiliary contact	S2C-H6R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
UR	Undervoltage release	S2C-UA
OR	Overvoltage release	S2C-OVP
AR	Auto reclosing unit	F2C-ARI
MOD-F	Motor operating device	F2C-CM
ST-F	Shunt trip for FB200 RCCB	F2C-A



System pro M

Accessories for DS201 M

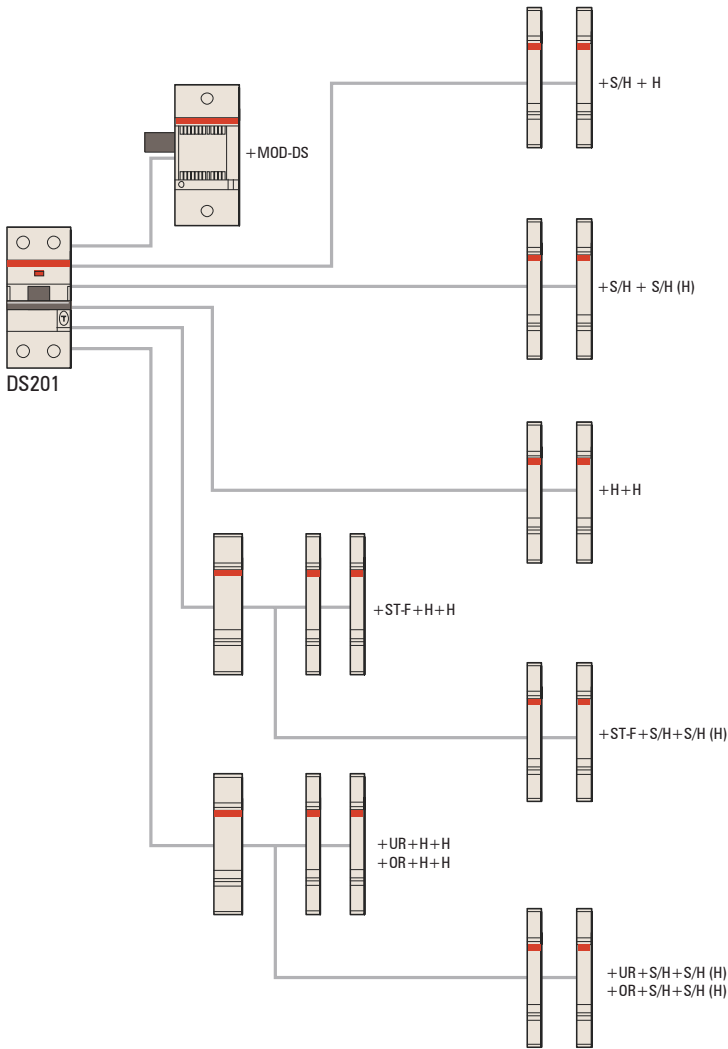

H	Auxiliary contact	S2C-H6R
S/H	Signal/Auxiliary contact	S2C-S/H6R
S/H (H)	Signal/Auxiliary contact used as auxiliary contact	S2C-S/H6R
ST-F	Shunt trip for DS201 RCCB	F2C-A
UR	Undervoltage release	S2C-UA
OR	Oversvoltage release	S2C-OVP
MOD-DS	Motor operating device	DS2C-CM

Accessories

for SB200 M, SB200 DC, switch disconnecto
SDB200, RCBO DS201 M and E200



SA 1



SA 2

Locking device for MCBs and switches

Prevents unauthorised or dangerous operation of the operating lever. An adaptor makes it possible to block the operating lever whether switched ON or OFF. The lever is blocked with a padlock having a cross bar section of 3 or, as the case may be, 6 mm max. For multipole devices, one lock may be fitted per pole.

The lock adaptor can be used for all MCBs of the SB200 M, SB200 DC, switch disconnecto
SDB200, RCBO DS201 M and E200.

Description	Order details		Standard pack	L.P. ₹
	Type code	Order code		
Locking Device 3mm	SA 1	GJF1101903R0001	10	570
Lock Adaptor 6mm	SA 1E	GJF1101903R0004	10	565
Padlock with 2 keys	SA 2	GJF1101903R0002	10	1,825
Padlock, identical locking with 2 keys	SA 2 i	GJF1109999R0001	10	1,385
Lock adapto incl. padlock with 3 keys in transparent box	SA 3	GJF1101903R0003	10	1,735

Auxiliary elements for

MCBs SB200 M, SB200 DC, switch disconnecter SDB200, RCCB-FB200 and RCBO-DS201 M



S2C-S/H6R

2CSC400465F0201

Signal/auxiliary contacts

Signal contacts indicate if a device trips due to a failure (overcurrent/short-circuit for MCBs and RCBOs; earth fault for RCCBs and RCBOs). Auxiliary contacts indicate the position of the contacts, independent if a failure occurred or the device was operated manually.

S2C-S/H6R:

Choice through a selector between signal and auxiliary contact.

S2C-H6R and S2C-HxxR:

Auxiliary contacts with contact configuration according to the following table. All right-side mounted contacts are suitable for MCBs, RCDs, switch disconnectors SDB200 according to the "Selection tables" which are displayed at the beginning of chapter 4.



S2C-H6-...

2CSC400465F0201

S2C-HxxL:

Auxiliary contacts with contact configuration according to the following table. These contacts are left-side mounted and fit to SB200 MCBs and switch disconnectors SDB200 according to the "Selection tables". Especially when using a motor operating device this is a possibility to add a contact as the right side mounted ones do not fit within this combination.

Description	Bbn 4016779	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
Signal contact/ auxiliary switch 1CO	563819	S2C-S/H6R	2CDS200922R0001	1	1,630
Auxiliary contact 1CO	563826	S2C-H6R	2CDS200912R0001	1	910
Auxiliary contact 1NO/1NC	697941	S2C-H6-11R	2CDS200946R0001	1	920
Auxiliary contact 2NO	697958	S2C-H6-20R	2CDS200946R0002	1	930
Auxiliary contact 2NC	697965	S2C-H6-02R	2CDS200946R0003	1	930

Auxiliary contacts mounting on the left side

Description	Bbn 4016779	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
Auxiliary contact 1 NO/1NC	648820	S2C-H11L	2CDS200936R0001	1	1,055
Auxiliary contact 2 NO	648837	S2C-H20L	2CDS200936R0002	1	1,030
Auxiliary contact 2 NC	648844	S2C-H02L	2CDS200936R0003	1	1,030

Auxiliary elements for

MCBs SB200 M, SB200 M DC, switch disconnecter SDB200 and RCBO DS201 M



S2C-A

Shunt trips

Function: remote opening of the device when a voltage is applied. Suitable for MCBs SB200 series, RCBOs DS201 series, SDB200 switch disconnectors series.

Shunt trips use a coil like MCBs for tripping. To trip a shunt, it is necessary to choose the right voltage and make sure the corresponding I_{bmax} (as mentioned in the table above) is provided by the power supply used. If the power supply can provide higher currents the shunt trip will reduce the current to I_{bmax} due to its internal resistance.

As soon as the shunt trips, the contact inside is open – the electrical circuit is disconnected even if the shunt trip is still powered on. The free-tripping mechanism of the shunt trip allows a restart of the MCB only after the shunt trip gets no external release signal anymore.

Auxiliary contacts mounting on the left side

Rated voltage	Bbn 4016779	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
AC/DC 12...60 V	570992	S2C-A1	2CDS200909R0001 ■	1	4,070
AC 110...415 V/DC110...250 V	571005	S2C-A2	2CDS200909R0002 ■	1	

Auxiliary elements for

RCCB FB200 and F200



F2C-A

Shunt trips

Function: remote opening of the device when a voltage is applied. Suitable for RCCBs FB200, F200 series and RCBOs DS201.

Auxiliary contacts mounting on the left side

Rated voltage	Bbn 8012542	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
AC/DC 12...60V	974901	F2C-A1	2CSS200933R0011	1	4,960
AC 110...415V / DC 110...250V	975007	F2C-A2	2CSS200933R0012	1	

Auxiliary elements for

MCBs SB200 M, SB200 DC, switch disconnecter SDB200 and RCBO DS201 M



2CSSC400325F0201

S2C-UA

Undervoltage releases

Function: protection of the load in the event of a voltage drop (between 70% and 35% of its rated value); positive safety (devices tripping when the voltage is disconnected) emergency stop by means of a button. Suitable for MCBs SB200 series, RCCBs FB200 series and RCBOs DS201, SDB200 switch disconnectors series.

Rated voltage	Bbn 8012542	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
12V DC	839705	S2C-UA 12 DC	2CSS200911R0001	1	5,220
24V AC	839804	S2C-UA 24 AC	2CSS200911R0002	1	
24V DC	896401	S2C-UA 24 DC	2CSS200911R0007	1	
48V AC	839903	S2C-UA 48 AC	2CSS200911R0003	1	
48V DC	896500	S2C-UA 48 DC	2CSS200911R0008	1	
110V AC	840008	S2C-UA 110 AC	2CSS200911R0004 ■	1	
110V DC	896609	S2C-UA 110 DC	2CSS200911R0009	1	
230V AC	840107	S2C-UA 230 AC	2CSS200911R0005 ■	1	
230V DC	896708	S2C-UA 230 DC	2CSS200911R0010	1	
400V AC	840206	S2C-UA 400 AC	2CSS200911R0006	1	

Overvoltage release

Function: monitoring voltage between the neutral and phase; when an overvoltage reaches the threshold value, the OVP device causes the tripping of the associated MCB or RCCB. Suitable for MCBs of the SB200 series up to 63 A, and RCCBs of the FB200 series up to 100 A and RCBOs DS201, Suitable for SDB200 switch disconnectors series.

Description	Bbn 8012542	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
Overvoltage release (max. tripping voltage AC: 275V)	748137	S2C-OVP1	2CSS200910R0005	1/5	6,225
Overvoltage release (max. tripping voltage AC: 290V)	952039	S2C-OVP2	2CSS200993R0005	1/5	



2CSSC400055F0201

S2C-Nt

Hand operated neutral left side mounted

S2C-Nt		
Rated current	A	max. 40
Terminal	mm ²	10; cage terminal
Tightening torque	Nm	1.2
Dimensions (H x D x W)	mm	85 x 69 x 8.8

Hand operated neutral

The hand operated neutral has to be mounted to the left side of the MCB and be snapped onto the DIN rail. It is used for measuring duties where the neutral conductor must be in the open position. Due to the special design of the handle - when switching ON the MCB - the neutral will make before the MCB is closed. Suitable for SDB200 switch disconnecter series. The S2C - Nt is not to switch with a tool (screwdriver).

Description	Bbn 4016779	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
Max 40A	647625	S2C-Nt	2CDS200918R0001	1	930

Accessories

Rotary operating mechanism for SB200 M



S2C-DH

Rotary operating mechanism (usable just with SB200/S200 devices)

For the actuation of 2-, 3- or 4pole miniature circuit-breakers in closed distribution boards for driveaxles of 5 or 6 mm² (square)

Description	Bbn 4012233	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
Rotary operating mechanism	57960 5	S2C-DH	GHS2001901R0003	1	Upon request

Note: S2C-DH cannot be used on DS200

Handles


Handle IP 65, 65 x 65 mm, padlockable with max. 3 padlocks (bail diameter 5 - 8 mm), door interlock in ON-position, adjustable*



OH

Color	Suitable for switches	Bbn 4012233	Order details		Standard pack	L.P. ₹
		EAN	Type code	Order code		
Black	OT16...40F	40978 8	OHBS2AJ	1SCA105213R1001	1	Upon request
Yellow-red	OT16...40F	41226 9	OHYS2AJ	1SCA105296R1001	1	
Silver	OT16...40F	41199 6	OHSS2AJ	1SCA105278R1001	1	
Grey	OT16...40F	41186 6	OHGS2AJ	1SCA105265R1001	1	

Handle IP 65, 65 x 65 mm, padlockable with max. 3 padlocks (bail diameter 5 - 8 mm), door interlock in ON-position



OXS6X

Color	Suitable for switches	Bbn 4012233	Order details		Standard pack	L.P. ₹
		EAN	Type code	Order code		
Black	OT16...40F	41140 8	OHBS2AJ1	1SCA105215R1001	1	Upon request
Yellow-red	OT16...40F	41227 6	OHYS2AJ1	1SCA105297R1001	1	
Silver	OT16...40F	41210 8	OHSS2AJ1	1SCA105279R1001	1	
Grey	OT16...40F	41187 3	OHGS2AJ1	1SCA105266R1001	1	

* OH_2_J enables selection of MCB behavior when opening panel door (remain switched on or switch off).
OH_2_J1 will cause MCB to switch off when opening panel door.

Axle extension

Type and order numbers are for one piece. For selector type handles. Shaft diameter 6 mm.

Lenght	Suitable for switches	Bbn 4012233	Order details		Standard pack	L.P. ₹
		EAN	Type code	Order code		
85	OT16...40F	36571 8	OXS6X85	1SCA101647R1001	10	Upon request
105	OT16...40F	42411 8	OXS6X105	1SCA108043R1001	10	
120	OT16...40F	36578 7	OXS6X120	1SCA101654R1001	10	
130	OT16...40F	36577 0	OXS6X130	1SCA101655R1001	10	
160	OT16...40F	36580 0	OXS6X160	1SCA101656R1001	10	
180	OT16...40F	36583 1	OXS6X180	1SCA101659R1001	10	
250	OT16...40F	36584 8	OXS6X250	1SCA101660R1001	10	
330	OT16...40F	36585 5	OXS6X330	1SCA101661R1001	10	

Auxiliary elements for

MCBs SB200 M, SB200 DC, switch disconnectors SDB200, RCCB FB200, F200 and RCBO DS201 M



F2C-ARI

Motor operating devices

Function: S2C-CM, F2C-CM and DS2C-CM allow the remote control (opening or closing) of the coupled device. Suitable for SB200 series MCBs and SDB200 switch disconnectors, FB200 RCCBs and RCBOs DS201.

Description	Bbn 8012542 EAN	Order details		Standard pack	L.P. ₹
		Type code	Order code		
Motor operating device for 1P S200 series MCBs and SD200 switch disconnectors	026259	S2C-CM1	2CSS201997R0013	1	Upon request
Motor operating device for 2P and 3P S200 series MCBs and SD200 switch disconnectors	026358	S2C-CM2/3	2CSS203997R0013	1	
Motor operating device for 4P S200P MCBs	026457	S2C-CM4	2CSS204997R0013	1	
Motor operating device for 2P and 4P F200 RCCBs	026556	F2C-CM	2CSF200997R0013	1	
Motor operating device for 1P+N and 2P DS201, DS202C RCBOs	135951	DS2C-CM	2CSR201997R0013	1	
Motor operating device for F200 125A RCCB	020721	F2-125A-24V-CM4	2CSF200997R1214	1	
Motor operating device for F200 125A RCCB	600626	F2-125A-230V-CM4	2CSF200997R1205	1	

Auto-reclosing units

Function: F2C-ARI and F2C-ARI30 allow the auto-reclosing of the coupled device in case of unwanted tripping. Suitable for F 200 RCCBs up to 100 A.

Description	Bbn 8012542 EAN	Order details		Standard pack	L.P. ₹
		Type code	Order code		
Auto-reclosing unit for 2P and 4P F200 RCCBs	026655	F2C-ARI	2CSF200996R0013	1	Upon request
Auto-reclosing unit for 2P and 4P F200 RCCBs (30")	064350	F2C-ARI30	2CSF200995R0013	1	

Auxiliary elements for RCCB FB200 and F200



F2C-ARH

Home automatic resetting unit (for domestic and similar applications)

Function: it recloses the associated residual current device, only after having checked that there are no effective faults in the system protected by the RCCB.

Suitable for 2-pole RCCB series with 30 mA or 100 mA sensitivities, max 63 A

Description	Bbn 8012542	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
Home automatic resetting unit (30 mA)	732433	F2C-ARH	2CSF200992R0005	1	Upon request
Home automatic resetting unit (100 mA)	658535	F2C-ARH100	2CSF200990R0005	1	



F2C-ARH-T

Home automatic resetting unit with autotest (for domestic and similar applications)

Function: it recloses the associated residual current device, only after having checked that there are no effective faults in the system protected by RCCB.

Suitable for 2-pole RCCB series with 30 mA or 100 mA sensitivities, max 63 A.

F2C-ARH-T allows the RCCB automatic test every six months.

Description	Bbn 8012542	Order details		Standard pack	L.P. ₹
	EAN	Type code	Order code		
Home automatic resetting unit (30 mA) with RCCB autotest	733232	F2C-ARH-T	2CSF200991R0005	1	Upon request
Home automatic resetting unit (100 mA) with RCCB autotest	593836	F2C-ARH-T100	2CSF200989R0005	1	

Auxiliary elements for MCBs S800 series



S800-AUX

Auxiliary contact

Description	Order details	Packing	Ordering code	L.P. (₹)
Auxiliary contact	S800-AUX	1	2CCS800900R0011	3,185



S800-AUX/ALT

Combined auxiliary and signal contact

Description	Order details	Packing	Ordering Code	L.P. (₹)
Auxiliary/signal contact	S800-AUX/ALT	1	2CCS800900R0021	3,805

■ Stock items



Wiring diagram

System Pro *M*

MCBs					
SB201 M	SB202 M	SB203 M	SB204 M	SB201 M NA	SB203 M NA

RCCBs	
FB202	FB204









RCBOs
DS201 M

Switch disconnect		
SDB202	SDB203	SDB204


Wiring diagram

SB200 DC










Example for permissible voltages between the conductors depending on the number of poles and circuit layout:

voltage between conductors	U_n	250 V-	500 V-	500 V-	500 V-
voltage between conductors and earth	U_n	250 V-	250 V-	500 V-	250 V-
MCB		1-pole SB200 DC	2-pole SB200 DC	2-pole SB200 DC	2-pole SB200 DC
supply from below					
supply from above					


Supply and load connections

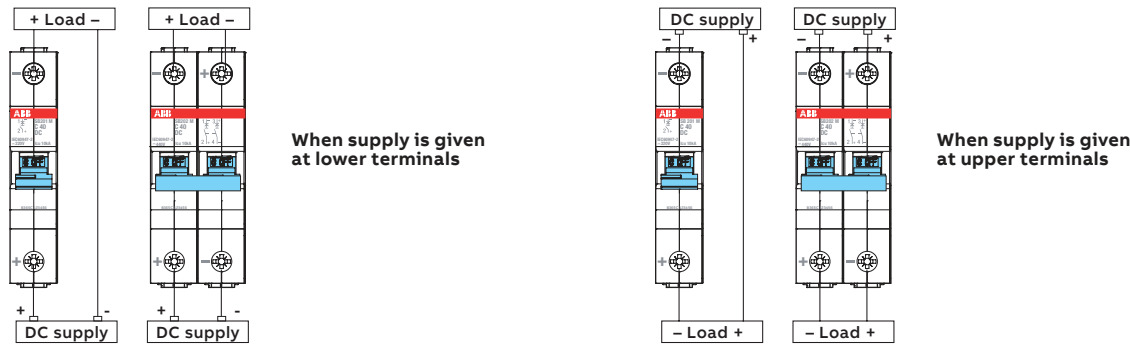

Auxiliary elements

S2C-S/H6R	S2C-H6R	S2C-H-11R	S2C-H6-20R
Used as signal contact 	Used as auxiliary contact 	Used as auxiliary contact 	Used as auxiliary contact 
Automatic opening 	Automatic opening 	Automatic opening 	Automatic opening 
Manual opening 			


Auxiliary elements

S2C-H6-02R
Opening 


Overall dimensions

System Pro *M*


MCB SB200 M and Switch disconnecter SDB200

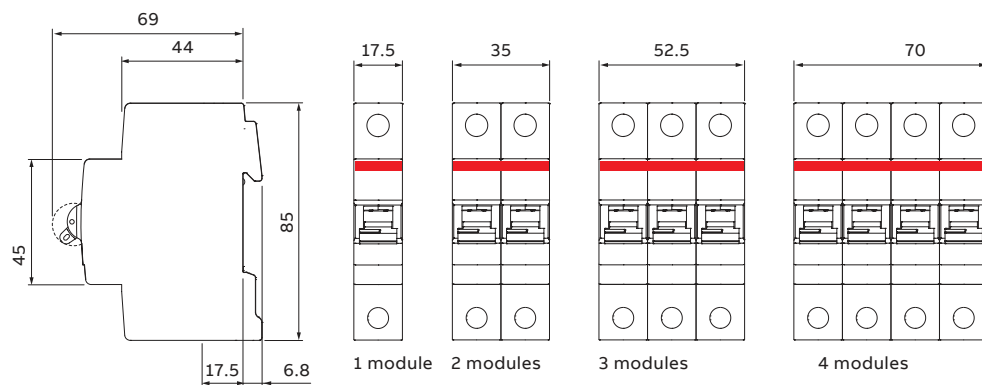


MCB SB200 DC

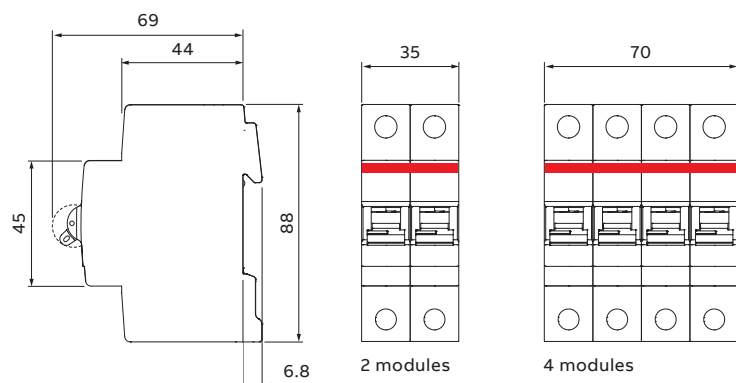

RCCB FB200

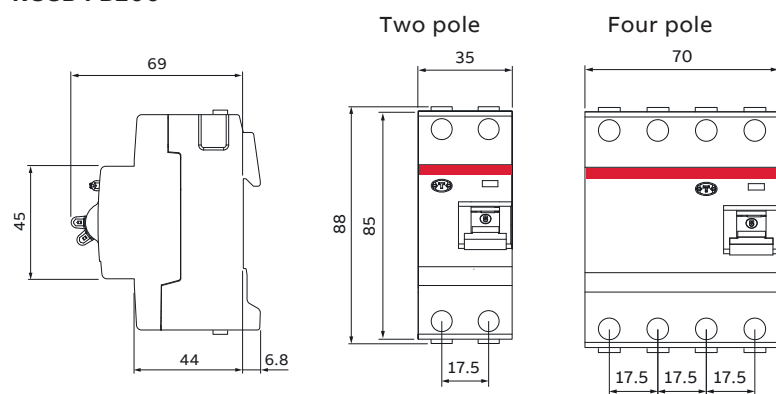


RCBO DS201 M

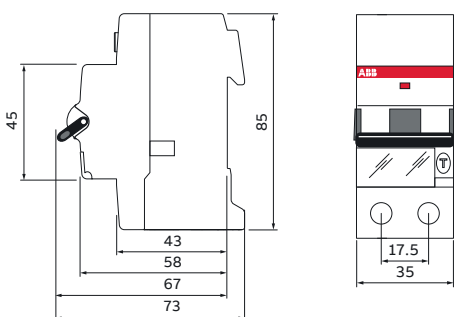




Overall dimensions


MCB - (S200 M and S200)

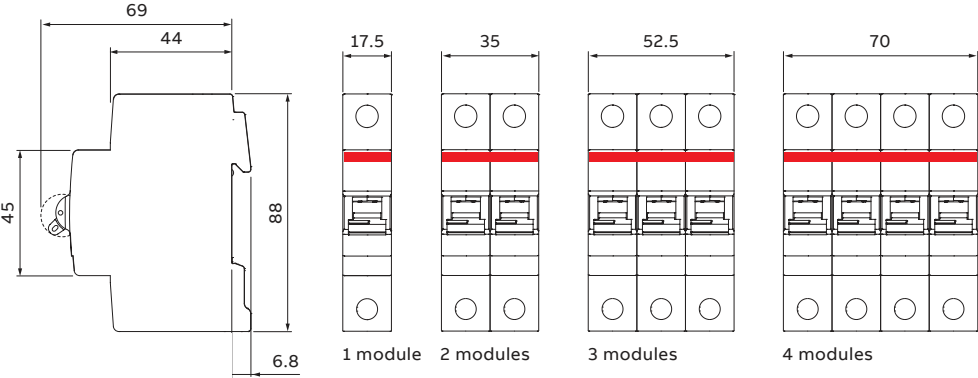


RCCB - (F200)





Two pole



Four pole




RCBO (DS200)



DDA 200


Two pole

In=25-63 A





Four pole

In=25-40 A

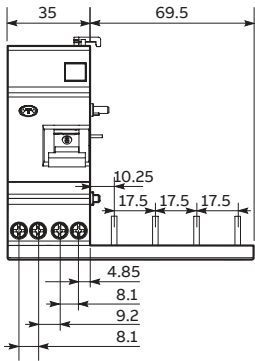


Four pole

In=63 A

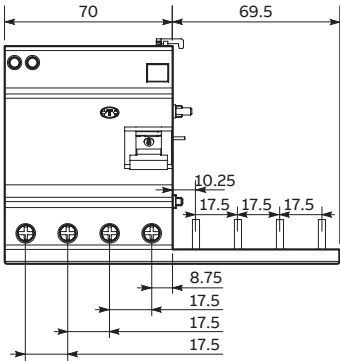

Surge protection devices - The new OVR QuickSafe®

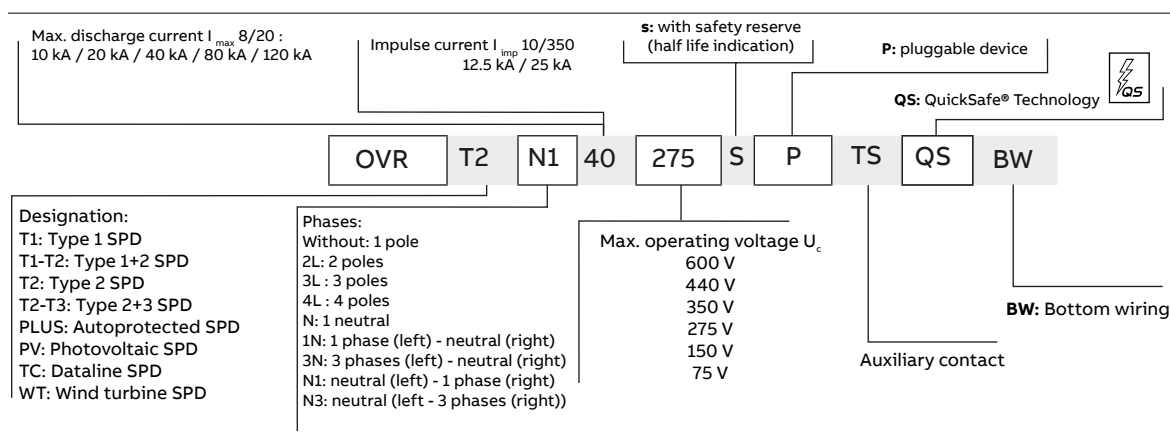

Type 1 - Spark gap type

Type 1 SPDs can be installed at the entrance in the main switch board for protection of electrical installation and equipments against direct lightning surges.

Three pole + neutral

Description	Max. continuous operating voltage U_c (V)	"I imp in kA (10/350us wave)"	"I max in kA (8/20us wave)"	Pole	No. of modules	Ordering code	L.P. (₹)
OVR T1 3N 25 255-7 (TT)	255	25	-	3+1	5	2CTB815101R8800	37,360
OVR T1 3N 25 255 (TT)	255	25	-	3+1	8	2CTB815101R1600	74,680
OVR T1 3N 25 255 TS (TT)	255	25	-	3+1	8	2CTB815101R0700	75,130

Type 1+2 - Metal oxide varistor

Type 1+2 surge protective devices are designed to discharge high current surges without any destruction of the installation. These surge protective devices are characterized by their capacity to withstand impulse current with 10/350 μ s wave form which simulate natural lightning current.

Three pole + neutral

Description	Max. continuous operating voltage U_c (V)	"I imp in kA (10/350us wave)"	"I max in kA (8/20us wave)"	Pole	No. of modules	Ordering code	L.P. (₹)
OVR T1-T2 3N 12.5-275s P QS	275	12.5	80	3+1	4	2CTB815710R1900	24,095
OVR T1-T2 3N 12.5-275s P TS QS	275	12.5	80	3+1	4	2CTB815710R0700	27,720
OVR T1-T2 3N 12.5-440s P QS	440	12.5	80	3+1	4	2CTB815710R4800	28,920
OVR T1-T2 3N 12.5-440s P TS QS	440	12.5	80	3+1	4	2CTB815710R3600	33,250

Type 2 - Metal oxide varistor

Type 2 SPDs can be installed at the sub-distribution switch board for protection of electrical installation and equipments against indirect lightning and switching surges.

Single pole

Description	Max. continuous operating voltage U_c (V)	I max in kA (8/20us wave)	No. of Modules	Ordering code	L.P. (₹)
OVR T2 40-275 P QS	275	40	1	2CTB803871R2300	4,080
OVR T2 40-275s P QS	275	40	1	2CTB815704R1200	6,035
OVR T2 40-275 P TS QS	275	40	1	2CTB803871R1700	5,200
OVR T2 40-440 P QS	440	40	1	2CTB803871R1200	4,165
OVR T2 40-440s P QS	440	40	1	2CTB815704R4100	5,735
OVR T2 80-275s P QS	275	80	1	2CTB815708R1200	6,240
OVR T2 80-275s P TS QS	275	80	1	2CTB815708R0000	7,685
OVR T2 80-440s P QS	440	80	1	2CTB815708R4100	5,645
OVR T2 80-440s P TS QS	440	80	1	2CTB815708R2900	7,080



OVR Type 1



OVR Type 2



OVR Type 2

Surge protection devices (OVR)



OVR Type 2

Single pole + neutral

Description	Max. continuous operating voltage U_c (V)	I max in kA (8/20 μ s wave)	No. of Modules	Ordering code	L.P. (₹)
OVR T2 1N 40-275 P QS	275	40	2	2CTB803972R1100	8,685
OVR T2 1N 40-275s P QS	275	40	2	2CTB815704R1400	10,950
OVR T2 1N 40-275 P TS QS	275	40	2	2CTB803972R0500	9,860
OVR T2 1N 40-275s P TS QS	275	40	2	2CTB815704R0200	11,980
OVR T2 1N 40-350 P QS	350	40	2	2CTB803982R1100	9,380
OVR T2 1N 40-350 P TS QS	350	40	2	2CTB803982R0500	10,650
OVR T2 1N 80-275s P QS	275	80	2	2CTB815708R1400	11,530
OVR T2 1N 80-275s P TS QS	275	80	2	2CTB815708R0200	12,725



OVR Type 2

Three pole + neutral

Description	Max. continuous operating voltage U_c (V)	I max in kA (8/20 μ s wave)	No. of modules	Ordering code	L.P. (₹)
OVR T2 3N 40-275 P QS	275	40	4	2CTB803973R1100	14,840
OVR T2 3N 40-275s P QS	275	40	4	2CTB815704R2000	21,150
OVR T2 3N 40-275 P TS QS	275	40	4	2CTB803973R0500	18,895
OVR T2 3N 40-275s P TS QS	275	40	4	2CTB815704R0800	24,785
OVR T2 3N 40-350 P QS	350	40	4	2CTB803983R1100	16,035
OVR T2 3N 40-350 P TS QS	350	40	4	2CTB803983R0500	24,060
OVR T2 3N 40-440 P QS	440	40	4	2CTB803973R1400	15,285
OVR T2 3N 40-440 P TS QS	440	40	4	2CTB803973R1500	19,130
OVR T2 3N 40-440s P TS QS	440	40	4	2CTB815704R3700	44,620
OVR T2 3N 80-275s P QS	275	80	4	2CTB815708R2000	22,110
OVR T2 3N 80-275s P TS QS	275	80	4	2CTB815708R0800	26,340
OVR T2 3N 80-440s P QS	440	80	4	2CTB815708R4900	19,295
OVR T2 3N 80-440s P TS QS	440	80	4	2CTB815708R3700	23,290



OVR PV

Surge arrester for photovoltaic applications

Description	Max. continuous operating voltage U_c (V)	I max in kA (8/20 μ s wave)	No. of modules	Ordering code	L.P. (₹)
OVR PV T2 40-1000 P QS	1100	40	3	2CTB804153R2400	5,435
OVR PV T2 40-1000 P TS QS	1100	40	3	2CTB804153R2500	6,870




OVR SL

Surge arrester for data line protection (Pluggable)

Description	Max. continuous operating voltage U_c (V)	I max in kA (8/20 μ s wave)	Width	Ordering code	L.P. (₹)
OVR SL06	7.79 V	10 kA	7mm	7TCA085400R0360	Upon request
OVR SL15	16.7 V	10 kA	7mm	7TCA085400R0361	
OVR SL30	36.7 V	10 kA	7mm	7TCA085400R0363	
OVR SL50	56.7 V	10 kA	7mm	7TCA085400R0364	
OVR SLTN	296 V	10 kA	7mm	7TCA085400R0323	


DBT Timer digital time switches **NEW**

An ideal range for automating the functions of the installation

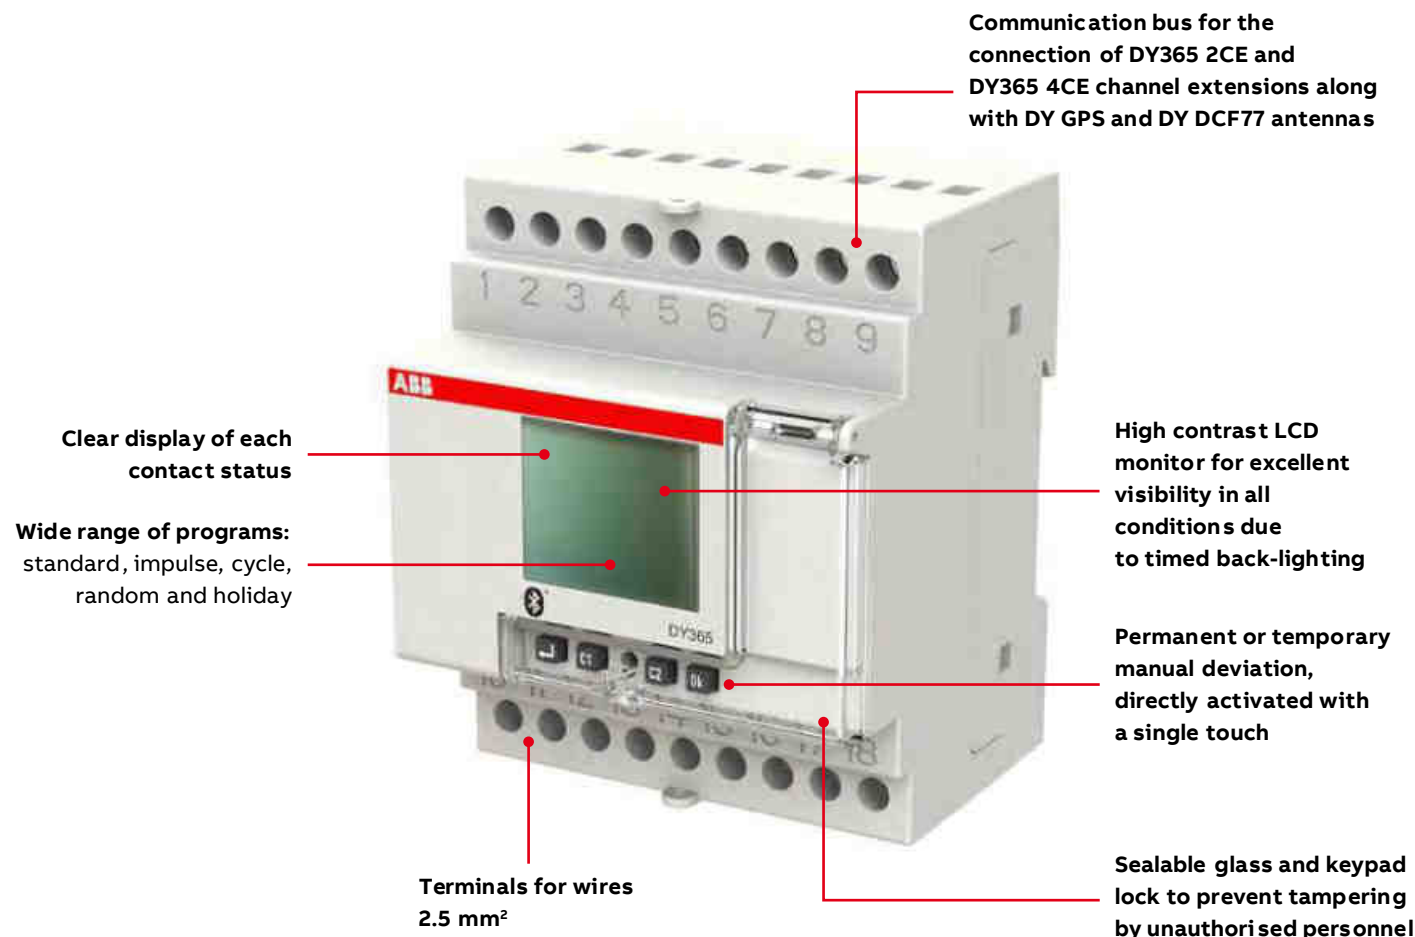

Wide range of programs: standard, impulse, cycle, random and holiday

- Permanent or temporary manual deviation, directly activated with a single touch
- LCD Display with back-lighting
- Up to 900 storable events
- Up to 400 pre-defined cities coordinates
- Accuracy of ± 0.5 seconds/24h
- Switching solar time/daylight saving time

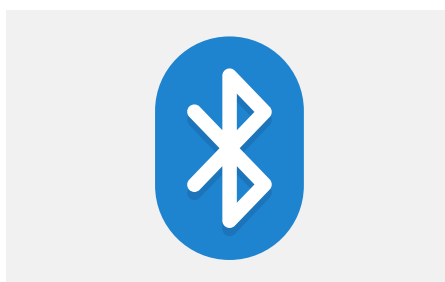

Bluetooth communication combined with the DBT Timer APP available for Android and iOS ensure smart configuration and quick visualization. This functionality also allows to transfer programs from one device to another simply using the Smartphone.



Time synchronization via DY DCF77 or DY GPS antennas. The DY DCF77 antenna receives scheduled messages transmitted by the atomic clock installed c/o Mainflingen (Germany), near Frankfurt. Thanks to this signal, the time switches are automatically set to: hour, date and proper daylight saving time. The DY GPS antenna receives time from the Global Positioning System, providing an accurate location and time information for an unlimited number of people in all weathers, day or night, anywhere in the world.

DBT Timer digital time switches

An ideal range for automating the functions of the installation



DW1

Digital weekly time switch - DW

DW1 and DW2 are weekly digital time switches with 1 and 2 channels, respectively. They allow exclusion of the normal weekly program in every week with the same mode.

Description	Ordering code	L.P. (₹)
DW weekly digital time switches-DW1, 1 channel	2CSM222531R1000	9,500
DW weekly digital time switches-DW2, 2 channel	2CSM222521R1000	14,840



DWA1

Digital weekly astronomical time switch - DWA

The astronomical switches DWA1 and DWA2, respectively, with 1 and 2 channels, automatically control lighting circuits depending on the time of sunrise and sunset, greatly increasing energy efficiency. The programming is in fact based on a mathematical algorithm able to calculate the time of the rising and setting of the sun in a certain location for each day of the year. Once powered the device, simply insert date, time, geographical coordinates and time zone so that it is ready to work. These settings can also be automatically defined using the DBT Timer APP. The installation of astronomical digital time switches is particularly useful when using a twilight switch with external sensor is not recommended because it may be subject to malfunctions caused by air pollution, excessive brightness or vandalism. DWA1 and DWA2 are also indicated for the control of public lighting, shop windows of shops, neon signs, monuments, facades, illuminated fountains.

Description	Ordering code	L.P. (₹)
DWA twilight astronomical switches DWA-1, 1 channel	2CSM222511R1000	20,580
DWA twilight astronomical switches DWA-2, 2 channel	2CSM222501R1000	25,685



TL1

TL1 Pole

TL Line modular twilight switches

TL1 twilight switch allows to switch ON and switch OFF lighting devices according to a scheduled level of the ambient light. It is used in combination with an external sensor to detect if the ambient light is higher or lower than the set level. A switching delay prevents them from operating unnecessarily when the light intensity suddenly changes (e.g. lightning, moving vehicles, etc.). The TL1 twilight switch 1 channel is preset with a 10 LUX from factory and it is equipped with 2 signalling LEDs that indicate the setpoint value and display the status of the contact. The operating instructions are printed on the side of the product.

Description	Ordering code	L.P. (₹)
TL1 modular twilight switches 1 channel with external sensor TL1	2CSM229921R1341	8,470
TL1 pole twilight switches, installation on the pole/wall TL1 Pole	2CSM229911R1341	7,885



AD1CO-15m

AG Timer electro-mechanical time switches

These analog timers are designed for installation on DIN-rail. They control circuit opening and closing according to the scheduled program. Available both on daily and weekly versions and equipped with a 16 A contact. They can be set on the scheduled program or on the permanent ON-OFF function. The AD1NO-R-15m, AD1CO-R-15m, AW1CO-R-120m, AD1CO-R-30m, AW1CO-R-210m versions are equipped with a built-in battery, charged by the network voltage, which allows the devices to maintain the set time also in case of long (up to 150 h) power supply failures. The products fit applications such as control of lighting systems of shops or commercial buildings, heating and ventilation systems as well as control of automatic irrigation systems of private or external gardens.

Description	Ordering code	L.P. (₹)
AD1CO Daily time switch, running reserve 1NO/1NC, AD1CO-R-15m	2CSM208151R1000	4,165

Control and automation components

Description	Ordering code	L.P. (₹)
E 232-230 staircase lighting time-delay switches, Staircase lighting time-delay switches are usually operated by pushbuttons, often fitted with a glow lamp. Switches are designed for a glow lamp current of up to 150 mA and thus perfectly suitable for installations in multi-storey buildings.	2CDE110000R0501	5,890
The E 232-230 staircase lighting time-delay switch includes an electro-mechanical timer with a synchronous motor drive to ensure high operational safety in whatever mounting position. The time range is adjustable in increments of 15 seconds from 1 to seven minutes. Resettable after 30 seconds	2CDE110003R0511	7,645




E200

SMISSLINE TP plug-in system

Changes have never been easier

SMISSLINE TP ensures that load-free devices and components can be snapped on and off under voltage without the need for additional personal protective equipment to guard against electrical hazards.

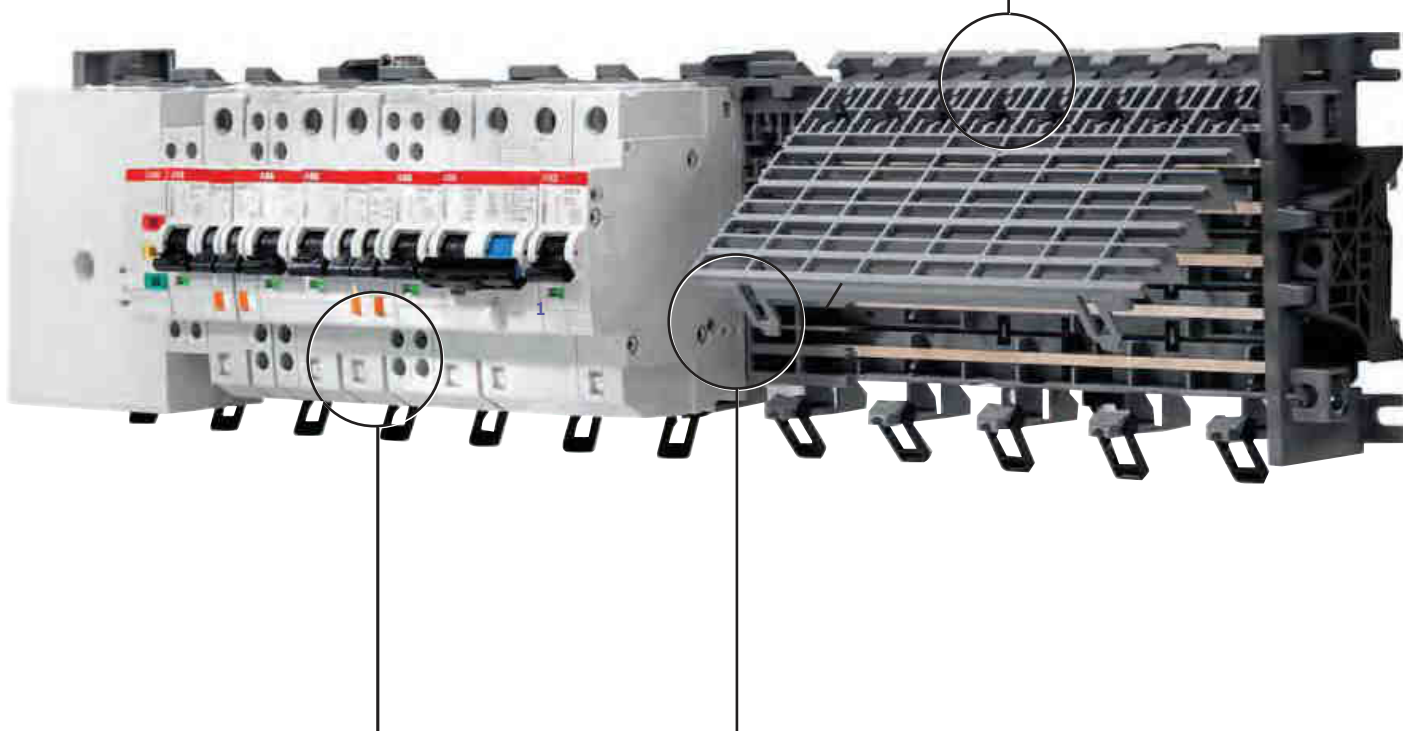

It opens up to completely new prospects for you when it comes to installation, operation and flexibility.

The world's first pluggable socket system.

SMISLINE TP plug-in system

Changes have never been easier



Even safer: protection against electrical hazards


We have upgraded our unique SMISLINE socket system even further through the addition of a pioneering innovation. With the new SMISLINE TP system, components can now be plugged in or unplugged load-free without any risk from electrical current running through the body.

The SMISLINE TP pluggable socket system is completely fingersafe (IP2XB) – when devices are plugged in and unplugged, the system is always touch-proof. This means that SMISLINE TP prevents any danger to personnel from switching arcs or accidental arcing.

Even more flexible: make additions and changes during on-going operation

Pluggable devices can be added and changed quickly, safely and simply during on-going operation. And this can be done without any need for personal protective equipment.

This means that you benefit from more flexibility, savings on installation and maintenance – and improved safety. SMISLINE TP provides greater availability and operating safety than conventional systems.

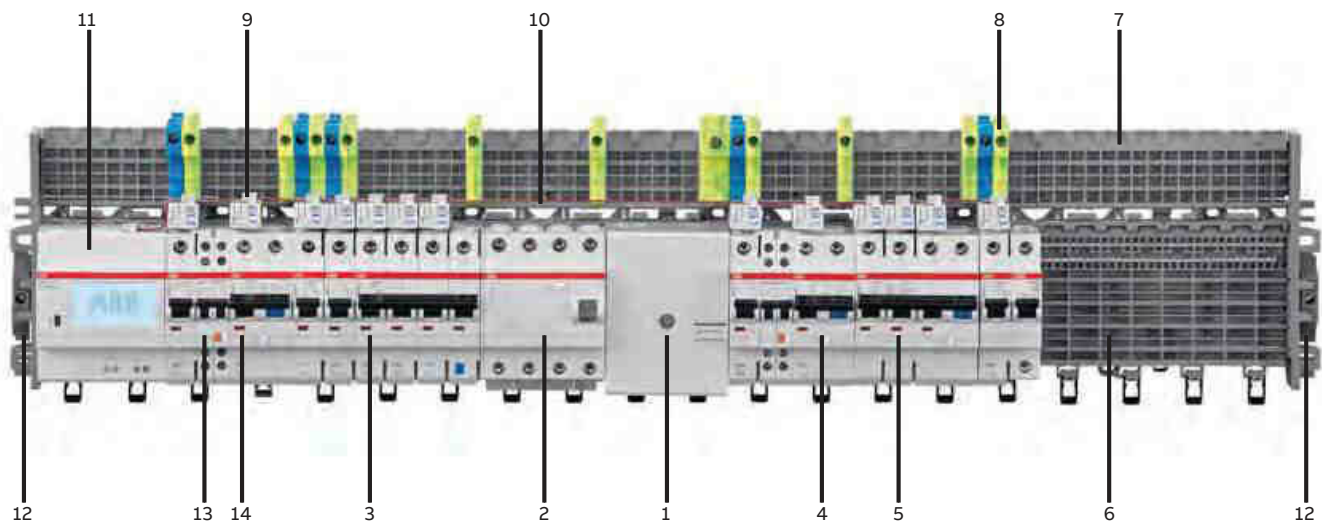

- | | | |
|------------------------------------|---|----------------------|
| 1 Supply terminal | 6 Socket IP20 | 11 Control unit CMS |
| 2 Surge arrester OVR404 | 7 Additional socket IP20 | 12 Socket end piece |
| 3 Miniature circuit breaker S403NP | 8 Terminals | 13 Auxillary contact |
| 4 RCBO FS401 | 9 Sensor for current measurement system | 14 Signal contact |
| 5 RCBO FS403 | 10 Cabel Bus system CMS | |

ELR, Earth leakage relay - (DIN & front panel mountable)



Front panel residual current relays are electronic devices used in combination with an external toroidal transformer. They are according to the protection standard IEC/EN 60947-2 Annex-M. The sensitivity can be set from 0.03 A to 30 A, while the tripping time from 0 to 5 seconds.

Residual current relays are available in versions 48x48 mm, 72x72 mm, and 96x96 mm.

The Fail Safe function is available for versions ELR48P, ELR72P and ELR96P: the contacts switch when there is no auxiliary power.

The ELR96PF version is equipped with Fail Safe function, fault memory LED, and a frequency filter, that ensure continuity of service in the presence of harmonics.

ELR96PD has (in addition to these functions) a digital display for an instantaneous view of the residual current $I_{\Delta n}$.

Description	Operating voltage	Pack	Ordering code	L.P.(₹)
ELR48P	110 V a.c./d.c. - 230 V a.c.	1	2CSG252211R1202	Upon request
ELR48V24P	24-48 V a.c./d.c.	1	2CSG452211R1202	
ELR72	110 V a.c./d.c. - 230 V a.c.	1	2CSG252120R1202	
ELR72V24	24-48 V a.c./d.c.	1	2CSG452120R1202	
ELR72P	110-230-400 V a.c.	1	2CSG152424R1202	
ELR72V24P	24-48 V a.c./d.c.	1	2CSG452424R1202	
ELR96	110-230-400 V a.c.	1	2CSG152130R1202	
ELR96V24	24-48 V a.c./d.c.	1	2CSG452130R1202	
ELR96P	110-230-400 V a.c.	1	2CSG152434R1202	
ELR96V24P	24-48 V a.c./d.c.	1	2CSG452434R1202	
ELR96PF	110-230-400 V a.c.	1	2CSG152435R1202	
ELR96PD	110-230-400 V a.c.	1	2CSG152436R1202	

RD3, residual current relays - (DIN rail mountable)

The RD3 family of electronic residual current relays provides residual current protection and monitoring functions according to IEC/EN 60947-2:2006 annex M and can be used in conjunction with all S 200 automatic devices and Tmax range moulded case devices up to T5, for industrial installations.

The RD3 residual current relays can provide status indications through two output contacts.

Description	Operating voltage	Pack	Ordering code	L.P.(₹)
RD3-48	12-48 a.c./d.c.	1	2CSJ201001R0001	Upon request
RD3	230-400 a.c.	1	2CSJ201001R0002	
RD3M-48	12-48 a.c./d.c.	1	2CSJ202001R0001	
RD3M	230-400 a.c.	1	2CSJ202001R0002	
RD3P-48	12-48 a.c./d.c.	1	2CSJ203001R0001	
RD3P	230-400 a.c.	1	2CSJ203001R0002	

Toroidal transformers

Description	Toroid useful diameter (mm)	Min. measureable current (mA)	Max. rated current ¹ (A)	Max. capacity ² (A)	Pack	Ordering code	L.P.(₹)
TRM	29 (modular version)	30	65	160	1	2CSM029000R1211	Upon request
TR1	35	30	75	250	1	2CSG035100R1211	
TR2	60	30	85	400	1	2CSG060100R1211	
TR3	80	100	160	800	1	2CSG080100R1211	
TR4	110	100	250	1,250	1	2CSG110100R1211	
TR4/A	110 (openable version)	300	250	1,250	1	2CSG110200R1211	
TR160	160	300	400	2,000	1	2CSG160100R1211	
TR160A	160 (openable version)	500	400	2,000	1	2CSG160200R1211	
TR5	210	300	630	3,200	1	2CSG210100R1211	
TR5/A	210 (openable version)	500	630	3,200	1	2CSG210200R1211	

¹ Shows toroidal transformers selection for use with ELR according to IEC/EN 60947-2 Annex M in combination with MCBs S200 range and MCCBs Tmax range upto T5

² Shows the technical features of the toroidal transformers

Measurement devices **NEW**

M1M 10 and M1M 12

Intuitive visualization

Clear and simple reading of the measurement data for all 3 phases on the wide LED displays.

Compact design

Only 52mm inside the switchboard to ensure optimized logistics and reduced footprint in the panel



Electrical system monitoring

Complete electrical parameters measurement, from simple VAF (voltage, current, frequency) to power and energy monitoring

Easy to use

Simple front keypad to navigate in setup and menus.

Remote measurement

Availability of RS485 interface with the support of communication protocol Modbus RTU facilitating the communication and connection of the device with remote locations.

M1M 10 and M1M 12

Technical features

		M1M 10 M1M 12
Auxiliary power supply	Auxiliary Power Supply range	80V to 300 V AC or DC
	Frequency Hz	50 - 60
	Burden	5VA Max
	Installation category	CAT III
	Protection fuse	200mA
Measurement accuracy	Voltage	±1,0%
	Current	±1,0%
	Active Power (M1M 12)	±1,0%
	Active Energy (M1M 12)	±1,0%
Voltage measurement inputs	Measurement range [V]	40-300V AC (p-n)
	Measurement category	CAT III
	Rated frequency [Hz]	50 - 60Hz
	Max. VT Primary [V]	999 Kv
	Burden [VA]	0.2VA Max. per phase
Current measurement inputs	CT secondary	1A or 5A
	Measurement range	50mA - 6A ¹
	Max. CT Primary [A]	99 kA.
	Burden [VA]	0.2VA Max. per phase
User Interface	Access to device	2 pushbuttons
	Display type	LED display
	LED Digit height [mm]	10
Communication protocol (M1M 12 Modbus)	RS-485	
	Protocol	Modbus RTU
	Communication interface	RS485 with optical isolation
	Baud rate	2400 bps to 19200 bps
	Parity number	Odd, Even, None
	Stop bit	1,2
	Address	1-247
Mechanical characteristics	Overall dimensions [mm]	96 x 96 x 58 (52mm depth inside the switchboard)
	IP degree of protection (IEC 60529)	IP51
	Weight [kg]	0,300
Climatic conditions	Operating temperature	-10°C to +60°C ²
	Storage temperature	-25°C to +70°C
	Relative humidity	5% to 95% non condensing
	Pollution degree	2
	Altitude	Below 2000ms
Standards	Electrical safety	IEC 61010-1
	EMC	IEC 61000 4-2,4-3,4-6,4-8,4-4,4-11; CISPR-22

¹ Below 250mA, additional error of 0.1% of full scale.

² Below 10°C, mean temperature coefficient is 0.15%/K



M1M 10 and M1M 12

Technical features




		M1M 10	M1M 12
Measured parameter	TRMS Voltage	■	■
	TRMS Current	■	■
	Frequency	■	■
	Power Factor		■
	Active Power		■
	Active Energy		■
	On Hours	■	■
	Load Hours		■
Communication interface	Serial port		RS-485
	Protocol		Modbus RTU



Overall dimensions

All measurements in mm

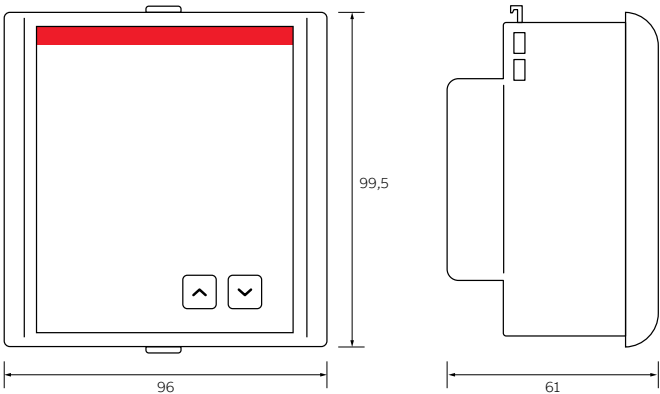

M1M 10 and M1M 12

Ordering codes



M1M 10

M1M 10

M1M 10 is a VAF meter for basic electrical system monitoring, providing the measurement of the main single-phase and three-phase electrical parameters and allowing easy replacement of different analogue meters.

Communication protocol and interface	Bbn 8012542 EAN	Order details Type code	Order code	Pack unit pc.	L.P.(₹)
-	350811	M1M 10	1SYG235081R4051 ■	1	2,485



M1M 12

M1M 12

M1M 12 is a multi-function meter, providing what is needed to monitor the electrical system and allowing statistical metering of active energy consumption.

M1M 12 product range includes option with built-in communication protocol (Modbus RTU) through RS485 communication port, allowing easy integration with Modbus supervision systems.

Communication protocol and interface	Bbn 8012542 EAN	Order details Type code	Order code	Pack unit pc.	L.P.(₹)
-	075912	M1M 12	1SYG207591R4051 ■	1	7,990
Modbus RTU RS485	075813	M1M 12 Modbus	1SYG207581R4051 ■	1	8,855

Measurement devices

M4M Network Analyzers



Full connectivity

Cloud-based power monitoring

Connectivity-based solutions increase awareness of resources and process behaviors: asset management can then be optimized through the control and monitoring of operations and costs.

M4M network analyzers ranges allow full connectivity and easy integration of submetering and power quality monitoring features, thanks to a complete set of communication protocols, matching high-accuracy standard requirements.

M4M exploits the scalability of the ABB solution, from stand-alone visualization and commissioning via HMI or EPiC mobile APP and desktop software, to monitoring, optimization and control of the complete electrical system via ABB Ability™.


At ABB we leverage internet of things' devices to drive digital transformation of buildings, by providing a scalable portfolio for energy and asset management.



Propose a single solution to optimize costs and energy needs thanks to M4M which is automatically integrated in ABB Ability™ EDCS cloud-computing platform, enabling real-time monitoring widgets, historical trend analysis and power quality reporting.



Propose projects compliant with energy efficiency regulations. High-accuracy network analyzers class 0,5 according to IEC 61557-12, connecting to the cloud complete set of electrical parameters and power quality KPIs: from THD to individual harmonics.



Rogowski coil acceptance to integrate measurement functionalities and power quality analysis in any existing installation, easily transmitted to the cloud also in brownfield projects.



**Scalable, fully connected,
unique ABB solution**



**Meet energy efficiency
requirements and
regulations**



**Revamping of any
existing installation**

Explore the new ranges **NEW**

M4M network analyzers are available in two different versions which ensure all power monitoring needs, from basic to more complete power quality analysis.



EQUIPPED WITH GRAPHIC COLOR DISPLAY AND 5 PUSHBUTTONS KEYBOARD, M4M 20 RANGE ALLOWS COMPLETE MONITORING AND BASIC POWER QUALITY ANALYSIS.



EQUIPPED WITH TOUCHSCREEN COLOR DISPLAY, M4M 30 RANGE ALLOWS COMPLETE POWER QUALITY ANALYSIS AND ENERGY EFFICIENCY EVALUATIONS.

Graphic color display

M4M 20 and M4M 30 are equipped with a graphic color display and common app-based menu for an intuitive visualization.

Bluetooth-enabled

All M4M network analyzers are equipped with Bluetooth module for smart commissioning via mobile app.

Full communication

A complete set of embedded communication protocols, including Modbus RTU, Modbus TCP/IP, Profibus DP-V0 and BACnet/IP

Input/Output

Control on the system thanks to I/O options including digital outputs, programmable I/O or programmable analogue outputs.

Datalogger


Data logging features are available, from complete notification logs to flash memory and RTC for 1-year data logging of trends.

Rogowski version

M4M Rogowski versions are compatible with ABB's R4M Rogowski coils for easy retrofit in existing installations.



01



02



03

01 M4M Homepage

02 Trending graphs of load profiles

03 R4M Rogowski coils

M4M 20 and M4M 30

Technical data



M4M 20



M4M 30

Real-time		
TRMS current	•	•
TRMS voltage	•	•
Frequency	•	•
Active, Reactive and Apparent Power	•	•
Power Factor	•	•
Operating timer, countdown timer	•	•
Energy		
Active, Reactive and Apparent Energy	•	•
4 quadrants Energy (Import/Export)	•	•
Tariffs	/	•
Power Quality		
THD (I, VLN, VLL)	•	•
Individual Harmonics	/	40th
Unbalances (I, VLN, VLL)	/	•
Neutral current	Calculated	Measured
Phasors (I, VLN)	/	•
Waveforms (I, VLN, VLL)	/	•
Data recording and logs		
Single alarms	25	25
Warnings, alarms and errors logs	•	•
Complex alarms with logics	/	4
Demand values (average)	Basic	Advanced
Min/Max Demand values	Basic	Advanced
Energy Trending logs	/	•
RTC	/	•
HMI	Graphic color	Graphic color touchscreen
Graphs visualization	Basic	Advanced
Notifications	•	•
Homepage and favourite page	•	•
Password protection	•	•
Connectivity		
Automatic integration in ABB Ability™ EDCS	•	•
Bluetooth Low Energy	•	•
Communication Protocols	Modbus RTU, Modbus TCP/IP, Profibus DP-V0, BACnet/IP	Modbus RTU, Modbus TCP/IP, Profibus DP-V0, BACnet/IP
RJ45 Daisy Chain (Ethernet version)	/	•

M4M 20 and M4M 30

Ordering codes



M4M 20

M4M 20 is ABB's network analyzer range that provides complete and accurate electrical parameters monitoring and basic power quality analysis.

Equipped with graphic color display for advanced visualization of the measured parameters and Bluetooth module for smart commissioning.

		Bbn	Order details		Pack	
Communication protocol	I/O	8012542 EAN	Type code	Order code	Unit pc.	L.P.(₹)
BLE	2 Digital out	511519	M4M 20	2CSG251151R4051	1	Upon request
BLE, Modbus RTU	2 Digital out	511410	M4M 20 Modbus	2CSG251141R4051	1	
BLE, Modbus TCP/IP	2 Digital out	044710	M4M 20 Ethernet	2CSG204471R4051	1	
BLE, Profibus DP-V0	2 Digital out	511311	M4M 20 Profibus	2CSG251131R4051	1	
BLE, BACnet/IP	2 Digital out	368311	M4M 20 Bacnet	2CSG236831R4051	1	
BLE, Modbus RTU	2 Progr. I/O, 2 Digital out, 2 Analogue out	511618	M4M 20 I/O	2CSG251161R4051	1	



M4M 20 - ROGOWSKI VERSION

M4M 20 is also available as compatible with ABB's R4M Rogowski coils for current measurement, increasing the flexibility of network analyzers offer and allowing retrofit in any existing installations.

M4M 20 Rogowski together with R4M Rogowski coils ensures the integration of basic power quality metering in any existing system with 0 downtime.

		Bbn	Order details		Pack	
Communication protocol	I/O	8012542 EAN	Type code	Order code	Unit pc.	L.P.(₹)
BLE, Modbus RTU	2 Digital Outputs	070818	M4M 20 Rogowski	2CSG207081R4051	1	Upon request

M4M 20 and M4M 30

Ordering codes



M4M 30

M4M 30 is ABB's network analyzer range that allows complete power quality analysis and energy efficiency evaluations.

Equipped with touchscreen color display for simplified access to the device and with Bluetooth module for smart commissioning.

		Bbn	Order details		Pack	
Communication protocol	I/O	8012542 EAN	Type code	Order code	Unit pc.	L.P.(₹)
BLE, Modbus RTU	4 Progr. I/O	747611	M4M 30 Modbus	2CSG274761R4051	1	Upon request
BLE, Modbus TCP/IP	4 Progr. I/O	746812	M4M 30 Ethernet	2CSG274681R4051	1	
BLE, Profibus DP-V0	4 Progr. I/O	367918	M4M 30 Profibus	2CSG236791R4051	1	
BLE, BACnet/IP	4 Progr. I/O	024514	M4M 30 Bacnet	2CSG202451R4051	1	
BLE, Modbus RTU	6 Progr. I/O, 2 Analogue out	024712	M4M 30 I/O	2CSG202471R4051	1	



M4M 30 - ROGOWSKI VERSION

M4M 30 is also available as compatible with ABB's R4M Rogowski coils for current measurement, increasing the flexibility of network analyzers and allowing retrofit in any existing installations.

M4M 30 Rogowski together with R4M coils ensure integration of complete PQ analysis in any existing system with 0 downtime.

		Bbn	Order details		Pack	
Communication protocol	I/O	8012542 EAN	Type code	Order code	Unit pc.	L.P.(₹)
BLE, Modbus RTU	4 Progr. I/O	024613	M4M 30 Rogowski	2CSG202461R4051	1	Upon request



R4M ROGOWSKI COILS

R4M Rogowski coils are flexible current transformer based on Rogowski technology, ideal to retrofit existing installations up to 12kA. Available in two different sizes (80mm or 200mm diameters), R4M coils are directly equipped with pre-wired removable terminals that perfectly fit M4M 20 Rogowski (3 Rogowski coil inputs) and M4M 30 Rogowski (4 Rogowski coil inputs), with no need for external integrators.

Bbn		Order details		Pack	L.P.(₹) Upon request
Diameter (mm)	8012542 EAN	Type code	Order code	unit pc.	
80	021605	R4M-80	2CSG202160R1101	1	
200	021506	R4M-200	2CSG202150R1101	1	

Complete integration in the ABB's
scalable solutions for energy and asset
management, to protect assets and
optimize costs and energy needs

**{ Full
connectivity...**

**...for integration with
ABB Ability™ system }**



Measurement devices

EQ matic energy meters selection table



	EQ meters C11	EQ meters C13	EQ meters B21	EQ meters B23	EQ meters B24		
Overall dimensions	1 DIN module	3 DIN modules	2 DIN modules	4 DIN modules	4 DIN modules		
Display	LCD	LCD	Backlit LCD	Backlit LCD	Backlit LCD		
Operating voltage	230 V AC	3x230/400 V AC	220...240 V AC	3x220/380...240/415 V AC			
Frequency	50 / 60 Hz						
Max current	40 A	40 A	65 A	65 A	6 A		
CTVT connected	-	-	-	-	CT		
Active energy	optional						
Reactive energy						-	-
Apparent energy						-	-
Accuracy	Cl. 1	Cl. 1 (B)	Cl. 1 (B)	Cl. 1 (B)	Cl. 1 (B), Cl. 0,5 S (C)		
Tariff	-	-	optional				
Event log	-	-					
Maximum demand	-	-	-	-	-		
Previous values	-	-	-	-	-		
Load profiles	-	-	-	-	-		
Harmonic analysis	-	-	-	-	-		
Alarm function							
Voltage							
Current							
Power factor							
Frequency	-	-	optional				
Pulse output							
Outputs	-	-	optional				
Inputs	-	-					
Built-in serial communication	-	-	IR, M-Bus, RS-485				
Protocols	-	-	M-Bus, Modbus RTU, EQ bus				

[illegible]

Measurement devices

Circuit Monitoring System

The quality of a Circuit Monitoring System is dependent on the strengths of the individual components and how well they interact. ABB's CMS sets the bar particularly high. Regardless of whether we're talking compactness, technology,


measurement results, user friendliness or flexibility, every component and every feature of this CMS has been fully optimized in terms of practicality and functionality.

Example illustration:
Control Unit CMS-700 in combination with CMS open-core sensors



CMS-700

CMS bus interface
A bus interface allows up to 32 sensors to be connected to the Control Unit.

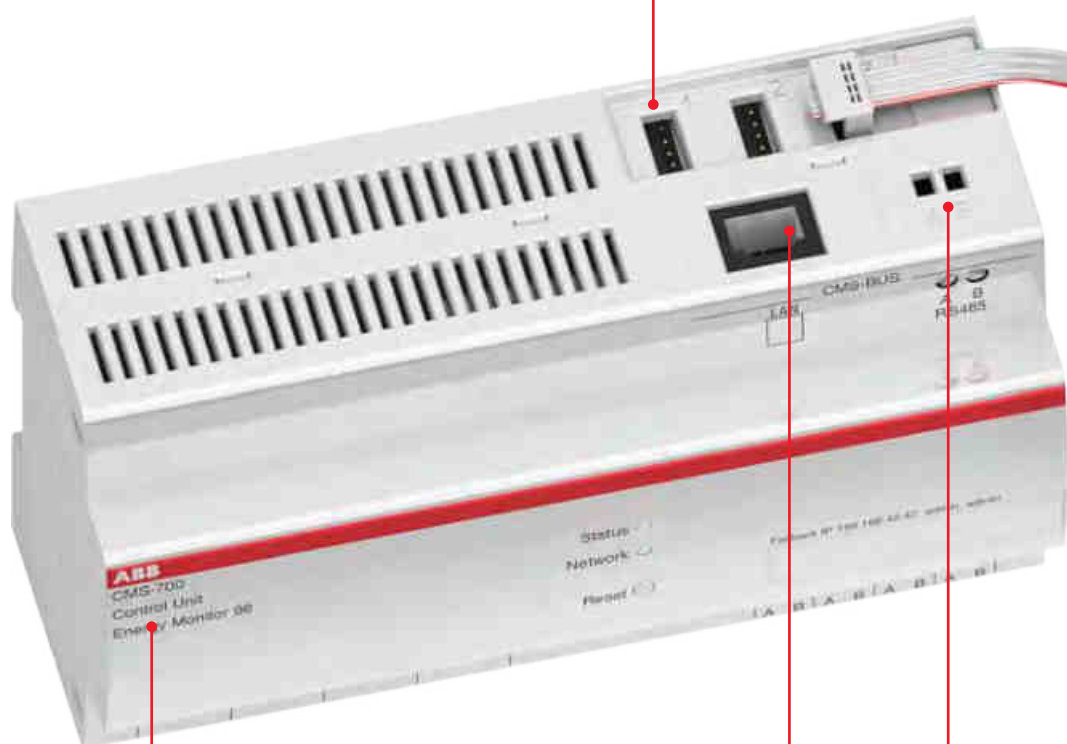

Control Units

The Control Unit is a kind of computing and communication center that, depending on the equipment connected to it, evaluates the different data picked up by the sensors and makes it available via the built-in interfaces.

You have a choice of three different units depending on your applications: CMS-600 and CMS-700.

Serial interfaces

Depending on the unit, numerous interfaces and protocols are available to ensure smooth network implementation: RS485 (Modbus RTU), LAN (TCP/IP and Modbus TCP), SNMP v1/v2 and encrypted v3.

Thanks to the built-in web server, an internet browser or a free Android or iOS app can be used to visualize the values measured. What's more, the measured values can also be exported to CSV files.

Integrate however you want, thanks to multiple mounting options.

Depending on the application, choose between up to four different mounting options to make integrating the CMS sensors in your installation as simple and as uncomplicated as possible.

Universally usable sensor designs



Mounting on a DIN rail

CMS-120DR, CMS-100DR, and CMS-200DR series sensors can be mounted on all DIN rails with the aid of a DIN rail mounting.



Cable tie mounting

If space is at a real premium, CMS-120CA, CMS-100CA, and CMS-200CA series sensors can be secured directly to the cable(s) to be measured by means of cable ties.

Tangible value addition for you ABB circuit monitoring pays off two-fold



Early warning system (predictive maintenance) for increasing the availability of critical consumers

Continuous monitoring of the current flow at the circuit breaker makes it possible to detect overloaded lines before they lead to a service interruption. Apart from this, monitoring individual circuits indicates whether the loads are in the desired operating mode or not. In this way, system deviations can be ascertained instantaneously. What's more, the CMS can be used to detect unbalanced loads before they result in failure of the neutral conductor and consequently load failure.



Cost analysis to reduce and assign energy costs

The cost of energy will rise continuously. In order to cut costs, you first have to know where they arise. The Control Unit helps illustrate and analyze the instantaneous energy consumption levels. Furthermore, the calculated active energy can be used to roughly allocate the costs at the output level.

ABB ITUS

Performance redefined

At ABB we look at global trends along with advances in innovation, along the line of power enclosures. Keeping these factors in mind, using advanced techniques and vast domain expertise, we come up with products that are future ready.

Keeping pace with new requirements coupled with dynamic changes in the business space, our products are designed so that they meet multiple objectives and desires of our customers.

Our products are designed to give maximum convenience and customization options, providing a true sense of freedom and choice for all your wiring needs.



Suitable for installation in MiVan construction

- Inner/outer folded back box provided with regular cutout on the top portion to increase the mechanical strength of the DB
- DB Box provided with cement guard so that slurry doesn't enter the DB box during concreting
- Removable frame is provided to facilitate adjustments owing to civil work, like plastering
- Once plastering is completed, frame and door are installed. Since thickness of plaster itself is 8 mm to 10 mm, the screws used to fix frame with the DB box have to be long enough, Hence long screws are provided to meet the requirement.

Both ITUS and Elegance can be used as per customer taste and preference.



ITUS



Elegance



ABB ITUS Distribution Enclosures

SPN-SHC

Horizontal single phase consumer unit with provision for 2 pole (MCB/Isolator/RCD) incoming and single phase outgoing. These distribution boards come with earth link, shrouded neutral link and tinned electrolytic copper insulated busbar. Top and bottom, removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 30, IK 08 Without door

Product description	Product code	No. of ways	No. of modules	Unit MRP (₹)
I-SPN06 WAY WD DB	1SYM011506C0001 ■	6 way	6	1,515
I-SPN08 WAY WD DB	1SYM011508C0001 ■	8 way	8	1,770
I-SPN10 WAY WD DB	1SYM011510C0001	10 way	10	1,960
I-SPN12 WAY WD DB	1SYM011512C0001 ■	12 way	12	2,055
I-SPN14 WAY WD DB	1SYM011514C0001	14 way	14	2,360
I-SPN16 WAY WD DB	1SYM011516C0001	16 way	16	2,675
I-SPN18 WAY WD DB	1SYM011518C0001 ■	18 way	18	3,045
I-SPN22 WAY WD DB	1SYM011522C0001	22 way	22	3,120



IP 43, IK 09 With metal door

Product description	Product code	No. of ways	No. of modules	Unit MRP (₹)
I-SPN06 WAY MD DB	1SYM011606C0001 ■	6 way	6	2,250
I-SPN08 WAY MD DB	1SYM011608C0001 ■	8 way	8	2,585
I-SPN10 WAY MD DB	1SYM011610C0001	10 way	10	2,970
I-SPN12 WAY MD DB	1SYM011612C0001 ■	12 way	12	3,050
I-SPN14 WAY MD DB	1SYM011614C0001	14 way	14	3,565
I-SPN16 WAY MD DB	1SYM011616C0001	16 way	16	3,800
I-SPN18 WAY MD DB	1SYM011618C0001 ■	18 way	18	4,050
I-SPN22 WAY MD DB	1SYM011622C0001	22 way	22	4,680



IP 43, IK 09 Metal door with acrylic

Product description	Product code	No. of ways	No. of modules	Unit MRP (₹)
I-SPN06 WAY AD DB	1SYM011706C0001	6 way	6	3,335
I-SPN08 WAY AD DB	1SYM011708C0001	8 way	8	3,835
I-SPN10 WAY AD DB	1SYM011710C0001	10 way	10	4,050
I-SPN12 WAY AD DB	1SYM011712C0001	12 way	12	4,410
I-SPN14 WAY AD DB	1SYM011714C0001	14 way	14	4,780
I-SPN16 WAY AD DB	1SYM011716C0001	16 way	16	5,020
I-SPN18 WAY AD DB	1SYM011718C0001	18 way	18	5,505
I-SPN22 WAY AD DB	1SYM011722C0001	22 way	22	6,065



IP 54, IK 09 Metal door

Product description	Product code	No. of ways	No. of modules	Unit MRP (₹)
I-SPN06 WAY WP DB	1SYM011806C0001	6 way	6	5,475
I-SPN08 WAY WP DB	1SYM011808C0001	8 way	8	7,245
I-SPN10 WAY WP DB	1SYM011810C0001	10 way	10	7,330
I-SPN12 WAY WP DB	1SYM011812C0001	12 way	12	8,325
I-SPN14 WAY WP DB	1SYM011814C0001	14 way	14	8,675
I-SPN16 WAY WP DB	1SYM011816C0001	16 way	16	9,260
I-SPN18 WAY WP DB	1SYM011818C0001	18 way	18	9,725
I-SPN22 WAY WP DB	1SYM011822C0001	22 way	22	10,395

■ Stock items

ABB ITUS Distribution Enclosures

TPN-SHDB

Horizontal three phase distribution board with provision for incomer 8 pole (MCB/Isolator/RCD) and single phase outgoing. These distribution boards come with earth link, shrouded neutral link, tinned electrolytic copper insulated busbar and wire sets for cable management. Top and bottom, removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 30, IK 08 Without door

Product description	Product code	No. of ways	No. of modules		Unit MRP (₹)
			I/C	O/G	
I-TPN04 WAY WD DB	1SYM021504C0001 ■	4 way	8	12	4,135
I-TPN06 WAY WD DB	1SYM021506C0001 ■	6 way	8	18	5,250
I-TPN08 WAY WD DB	1SYM021508C0001 ■	8 way	8	24	6,050
I-TPN12 WAY WD DB	1SYM021512C0001 ■	12 way	8	36	8,975



IP 43, IK 09 With metal door

Product description	Product code	No. of ways	No. of modules		Unit MRP (₹)
			I/C	O/G	
I-TPN04 WAY MD DB	1SYM021604C0001 ■	4 way	8	12	5,200
I-TPN06 WAY MD DB	1SYM021606C0001 ■	6 way	8	18	6,150
I-TPN08 WAY MD DB	1SYM021608C0001 ■	8 way	8	24	7,245
I-TPN12 WAY MD DB	1SYM021612C0001 ■	12 way	8	36	10,545

IP 43, IK 09 Metal door with acrylic

Product description	Product code	No. of ways	No. of modules		Unit MRP (₹)
			I/C	O/G	
I-TPN04 WAY AD DB	1SYM021704C0001	4 way	8	12	6,195
I-TPN06 WAY AD DB	1SYM021706C0001	6 way	8	18	7,655
I-TPN08 WAY AD DB	1SYM021708C0001	8 way	8	24	9,175
I-TPN12 WAY AD DB	1SYM021712C0001	12 way	8	36	14,070

IP 54, IK 09 Metal door

Product description	Product code	No. of ways	No. of modules		Unit MRP (₹)
			I/C	O/G	
I-TPN04 WAY WP DB	1SYM021804C0001	4 way	8	12	15,670
I-TPN06 WAY WP DB	1SYM021806C0001	6 way	8	18	18,730
I-TPN08 WAY WP DB	1SYM021808C0001	8 way	8	24	20,485
I-TPN12 WAY WP DB	1SYM021812C0001	12 way	8	36	28,865

ABB ITUS Distribution Enclosures

TPN-SHPPI per phase isolation

Horizontal per-phase isolation distribution board with provision for 8 pole (MCB/Isolator/RCD) as incomer, 3 DP MCB/Isolator/RCD as sub-incoming and SP MCBs as outgoing. These distribution boards come with separate shrouded neutral link for each phase, earthing link, tinned electrolytic copper insulated busbar and wire sets for cable management. Top and bottom removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 43, IK 09 With metal door

Product description	Product code	No. of ways	No. of modules			Unit MRP (₹)
			I/C	Sub I/C	O/G	
I-HPPI06 WAY MD DB	1SYM031606C0001 ■	6 way	8	6	12	8,850
I-HPPI08 WAY MD DB	1SYM031608C0001 ■	8 way	8	6	18	11,030
I-HPPI12 WAY MD DB	1SYM031612C0001 ■	12 way	8	6	30	14,420

ABB ITUS Distribution Enclosures

TPN-SVDB per phase isolation

Vertical per-phase Isolation Distribution Board in 4-tier structure with provision for 8 pole (MCB/ Isolator/ RCD) incomer and 2 pole (MCB/Isolator/RCD) as sub-incomer with single phase outgoing. These distribution boards come with separate shrouded neutral link for each phase, earthing link, tinned electrolytic copper insulated busbar and wire sets for cable management. Top and bottom removable gland plates with knockouts. Mounting of these boards can be flush or surface.




IP 43, IK 09 With metal door

Product description	Product code	No. of ways	No. of modules			Unit MRP (₹)
			I/C	Sub I/C	O/G	
I-VPPI06 WAY MD DB	1SYM041606C0001 ■	6 way	8	6	18	10,285
I-VPPI08 WAY MD DB	1SYM041608C0001 ■	8 way	8	6	24	12,195
I-VPPI12 WAY MD DB	1SYM041612C0001 ■	12 way	8	6	36	13,870

ABB ITUS Distribution Enclosures

TPN-8 segment

Eight segment distribution board with phase segregation and separation between incoming and outgoing with provision for 4P+8P incomer (MCB/Isolator/RCD) and 4 pole sub-incomer (MCB/Isolator/RCD) with single phase outgoing. These distribution boards come with shrouded neutral bar, earthing link and wire sets for cable management for each compartment. Top and bottom, removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 43, IK 09 With metal door

Product description	Product code	No. of ways	No. of modules			Unit MRP (₹)
			I/C	Sub I/C	O/G	
I-8SEG04 WAY MD DB	1SYM051604C0001 ■	4 way	4+8	12	12	13,750
I-8SEG06 WAY MD DB	1SYM051606C0001 ■	6 way	4+8	12	18	15,450
I-8SEG08 WAY MD DB	1SYM051608C0001 ■	8 way	4+8	12	24	17,220
I-8SEG12 WAY MD DB	1SYM051612C0001	12 way	4+8	12	36	21,415

ABB ITUS Distribution Enclosures

TPN-SVTDB MCB

Vertical three phase distribution board with provision for 8 pole (MCB/Isolator/RCD) incoming with three phase and single phase (TP/SP) outgoing These distribution boards come with complete insulated busbar (tinned electrolytic copper) arrangement, shrouded neutral bar and earth bars. Top and bottom removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 43, IK 09 Metal door

Product description	Product code	No. of ways	No. of modules		Unit MRP (₹)
			I/C	O/G	
I-VTPN04 WAY MCB/IC MD DB	1SYM061604C0001 ■	4 way	8	12	12,260
I-VTPN06 WAY MCB/IC MD DB	1SYM061606C0001 ■	6 way	8	18	13,965
I-VTPN08 WAY MCB/IC MD DB	1SYM061608C0001 ■	8 way	8	24	15,150
I-VTPN12 WAY MCB/IC MD DB	1SYM061612C0001	12 way	8	36	20,710

ABB ITUS Distribution Enclosures

TPN-SVTDB XT1

Vertical three phase distribution board with provision for 4 pole MCCB (XT1) up to 160A as incomer with three phase and single phase (TP/SP) MCB outgoing. These distribution boards come with complete insulated busbar (tinned electrolytic copper) arrangement, shrouded neutral bar and earth bars. Top and bottom removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 43, IK 09 Metal door

Product description	Product code	No. of ways	No. of modules		Unit MRP (₹)
			I/C	O/G	
I-VTPN04 WAY XT1/IC MD DB	1SYM071604C0001	4 way	XT1 160	12	15,160
I-VTPN06 WAY XT1/IC MD DB	1SYM071606C0001	6 way	XT1 160	18	17,150
I-VTPN08 WAY XT1/IC MD DB	1SYM071608C0001	8 way	XT1 160	24	18,750
I-VTPN12 WAY XT1/IC MD DB	1SYM071612C0001	12 way	XT1 160	36	24,670

ABB ITUS Distribution Enclosures

TPN-SVTDB XT3

Vertical three phase distribution board with provision for 4 pole MCCB (XT3) up to 250A as incomer with three phase and single phase (TP/SP) MCB outgoing. These distribution boards come with complete insulated busbar (tinned electrolytic copper) arrangement, shrouded neutral bar and earth bars. Top and bottom removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 43, IK 09 Metal door

Product description	Product code	No. of ways	No. of modules		Unit MRP (₹)
			I/C	O/G	
I-VTPN04 WAY XT3/IC MD DB	1SYM081604C0001	4 way	XT3 250	12	26,350
I-VTPN06 WAY XT3/IC MD DB	1SYM081606C0001	6 way	XT3 250	18	27,795
I-VTPN08 WAY XT3/IC MD DB	1SYM081608C0001	8 way	XT3 250	24	30,670
I-VTPN12 WAY XT3/IC MD DB	1SYM081612C0001	12 way	XT3 250	36	32,170

ABB ITUS Distribution Enclosures

SVFLM flexi tier

Total flexibility as per site needs - configuration as per your choice of incomer and outgoing. Supply busbars need to be selected. These distribution boards come with shrouded neutral link, earthing link. Top and bottom, removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 43, IK 09 Metal door

Product description	Product code	No. of ways	No. of rows	No. of modules	Unit MRP (₹)
I-2 ROW 13 MOD DB	1SYM101632C0001	2 Row of 13 Mod	2	26	6,050
I-2 ROW 14 MOD DB	1SYM101642C0001	2 Row of 14 Mod	2	28	6,975
I-3 ROW 13 MOD DB	1SYM101633C0001	3 Row of 13 Mod	3	39	7,350
I-3 ROW 14 MOD DB	1SYM101643C0001	3 row of 14 Mod	3	42	7,685
I-4 ROW 13 MOD DB	1SYM101634C0001	4 Row of 13 Mod	4	52	8,950
I-4 ROW 14 MOD DB	1SYM101644C0001	4 Row of 14 Mod	4	56	9,450

ABB ITUS Distribution Enclosures

SPVS phase selector

Phase selector distribution boards with in-built 3 numbers of selector switches and 3 numbers of piano switches as well as provision for 8 pole MCB/Isolator/RCD as incoming and SP MCBs as outgoing. These distribution boards come with earth link, shrouded neutral link, tinned electrolytic insulated copper busbar and wire sets for cable management. Top and bottom, removable gland plates with knockouts. Mounting of these boards can be flush or surface.



IP 43, IK 09 Metal door

Product description	Product code	No. of ways	No. of modules I/C O/G	Unit MRP (₹)
I-PS 63A04 WAY MD DB	1SYM091604C0001	4 way	8 12	17,250
I-PS 63A06 WAY MD DB	1SYM091606C0001	6 way	8 18	17,250
I-PS 63A08 WAY MD DB	1SYM091608C0001	8 way	8 24	18,950
I-PS 63A12 WAY MD DB	1SYM091612C0001	12 way	8 36	20,670

ABB ITUS Distribution Enclosures

SEN enclosures

Metal enclosures, universal mounting suitable for DP, FP, 6P and 8 pole arrangements.



IP 20, IK 08

Product description	Product code	No. of ways	No. of modules	Unit MRP (₹)
I- 2MOD Metal Enclosure	1SYM121502C0001 ■	2P enclosure	2	790
I- 4MOD Metal Enclosure	1SYM121504C0001 ■	4P enclosure	4	795
I- 6MOD Metal Enclosure	1SYM121506C0001 ■	6P enclosure	6	1,085
I- 8MOD Metal Enclosure	1SYM121508C0001 ■	8P enclosure	8	1,295

ABB ITUS Distribution Enclosures

P&S boards

This range offers a wide variety of plug & socket boards. These plugs & sockets can be used for single phase or three phase applications up to 30A along with MCB or RCBO with provision for universal mounting.



IP 20, IK 08

Product description	Product code	No. of ways	No. of modules	Unit MRP (₹)
I- 20A SP 2Pin P&S Enclosure	1SYM111520C0001 ■	1	2	2,030
I- 30A TP 3Pin P&S Enclosure	1SYM111530C0001 ■	1	4	4,340

ABB ITUS Distribution Enclosures

Cable end boxes

SPN-SHC

Product description	Product code	No. of ways	Unit MRP (₹)
I-SPN06 WAY MD CEB	1SYM140106C0001	6 way	735
I-SPN08 WAY MD CEB	1SYM140108C0001	8 way	895
I-SPN10 WAY MD CEB	1SYM140110C0001	10 way	945
I-SPN12 WAY MD CEB	1SYM140112C0001	12 way	1,050
I-SPN14 WAY MD CEB	1SYM140114C0001	14 way	1,135
I-SPN16 WAY MD CEB	1SYM140116C0001	16 way	1,285
I-SPN18 WAY MD CEB	1SYM140118C0001	18 way	1,540
I-SPN22 WAY MD CEB	1SYM140122C0001	22 way	1,630

TPN-SHDB

Product description	Product code	No. of ways	Unit MRP (₹)
I-TPN04 WAY MD CEB	1SYM140204C0001	4 way	1,105
I-TPN06 WAY MD CEB	1SYM140206C0001	6 way	1,540
I-TPN08 WAY MD CEB	1SYM140208C0001	8 way	2,680
I-TPN12 WAY MD CEB	1SYM140212C0001	12 way	3,655

TPN-SHPPI

Product description	Product code	No. of ways	Unit MRP (₹)
I- HPPI06 WAY MD CEB	1SYM140306C0001	6 way	1,540
I- HPPI08 WAY MD CEB	1SYM140308C0001	8 way	2,680
I- HPPI12 WAY MD CEB	1SYM140312C0001	12 way	3,655

TPN-SVDB

Product description	Product code	No. of ways	Unit MRP (₹)
I- VPPI06 WAY MD CEB	1SYM140406C0001	6 way	1,315
I- VPPI08 WAY MD CEB	1SYM140408C0001	8 way	1,315
I- VPPI12 WAY MD CEB	1SYM140412C0001	12 way	1,500

8 Segment

Product description	Product code	No. of ways	Unit MRP (₹)
I-8SEG04 WAY MD CEB	1SYM141013C0001	4 way	1,945
I-8SEG06 WAY MD CEB	1SYM141014C0001	6 way	2,995
I-8SEG08 WAY MD CEB	1SYM140600C0001	8 way	4,410
I-8SEG12 WAY MD CEB	1SYM140700C0001	12 way	6,090

SVTDB, XT1 & XT3

Product description	Product code	No. of ways	Unit MRP (₹)
I-VTPN MCB/IC MD CEB	1SYM140800C0001	For all SVTDB MCB I/C	2,510
I-VTPN XT1/IC MD CEB	1SYM140504C0001	For all SVTDB MCCB XT1 I/C	3,975
I-VTPN XT3/IC MD CEB	1SYM140506C0001	For all SVTDB MCCB XT3 I/C	3,975

SVFLM

Product description	Product code	No. of ways	Unit MRP (₹)
I- 13 MOD CEB	1SYM140508C0001	13 module	1,630
I-14 MOD CEB	1SYM140512C0001	14 module	1,945

Busbars and blanking plate

Product description	Product code	No. of ways	No. of modules	Unit MRP (₹)
I- 13 MOD Insulated Busbar	1SYM131514C0001	13		400
I- 14 MOD Insulated Busbar	1SYM131500C0001	14		400
I- Blank Plate	1SYM131513C0001		1	21

Elegance series

Distribution boards

Elegance series (E-series) distribution boards are available in texture grey (color code - RAL7035)

Construction

Blending aesthetics, functionality and safety, the E-series of ABB distribution boards are manufactured with high precision, and high quality CRCA steel sheets. These distribution boards undergo a seven-tank phosphating process to ensure anti-rust conditioning, superior finish and lasting strength. Premier quality powder coating is applied using the latest techniques

Colour

ABB's E-series of distribution boards is available in texture grey (RAL 7035)

Installation

The E-series of ABB distribution boards are universal mounting type, hence can be flush or wall mounted. These distribution boards are provided with top and bottom removable gland plates with adequate no of knock outs, which enable easy installation and connection of conduits of sizes up to 32 mm dia knock out.

Protection

E-series distribution boards offer three types of protection- IP43 & IP54 degree with a metal door and IP30 degree without a door. The highest degree of attention has been paid to the safety aspect of the distribution boards, considering that they are installed in close proximity to people. An intermediate plate ensures total safety, as no live parts are exposed when the door is opened.



Elegance series

Distribution boards

SPN DB -E-SHC

Horizontal single phase consumer unit with provision for incoming 2 pole (MCB / Isolator / RCD) and single phase outgoing. Suitable for surface and flush mounting.

IP 30

Product description	Ordering code	No. of ways	No of modules	Unit MRP (₹)
E-SHC WD 4	1SYE011504C0001 ■	4 way	4+2	1,405
E-SHC WD 6	1SYE011506C0001	6 way	6+2	1,515
E-SHC WD 8	1SYE011508C0001 ■	8 way	8+2	1,815
E-SHC WD 10	1SYE011510C0001	10 way	10+2	1,905
E-SHC WD 12	1SYE011512C0001 ■	12 way	12+2	2,185
E-SHC WD 14	1SYE011514C0001	14 way	14+2	2,475
E-SHC WD 16	1SYE011516C0001 ■	16 way	16+2	2,820
E-SHC WD 20	1SYE011520C0001	20 way	20+2	3,175

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHC M 4	1SYE011604C0001 ■	4 way	4+2	2,210
E-SHC M 6	1SYE011606C0001	6 way	6+2	2,380
E-SHC M 8	1SYE011608C0001 ■	8 way	8+2	2,750
E-SHC M 10	1SYE011610C0001	10 way	10+2	2,880
E-SHC M 12	1SYE011612C0001 ■	12 way	12+2	3,300
E-SHC M 14	1SYE011614C0001	14 way	14+2	3,520
E-SHC M 16	1SYE011616C0001 ■	16 way	16+2	3,965
E-SHC M 20	1SYE011620C0001	20 way	20+2	4,620

IP 43 Metal door with acrylic

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHC P 4	1SYE011704C0001	4 way	4+2	2,540
E-SHC P 6	1SYE011706C0001	6 way	6+2	2,810
E-SHC P 8	1SYE011708C0001	8 way	8+2	2,970
E-SHC P 10	1SYE011710C0001	10 way	10+2	3,400
E-SHC P 12	1SYE011712C0001	12 way	12+2	3,725
E-SHC P 14	1SYE011714C0001	14 way	14+2	4,050
E-SHC P 16	1SYE011716C0001	16 way	16+2	4,535
E-SHC P 20	1SYE011720C0001	20 way	20+2	5,315

IP 54

Product Description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHC M WP 4	1SYE011804C0001	4 way	4+2	5,745
E-SHC M WP 6	1SYE011806C0001	6 way	6+2	6,230
E-SHC M WP 8	1SYE011808C0001	8 way	8+2	6,795
E-SHC M WP 10	1SYE011810C0001	10 way	10+2	7,160
E-SHC M WP 12	1SYE011812C0001	12 way	12+2	7,820
E-SHC M WP 14	1SYE011814C0001	14 way	14+2	7,965
E-SHC M WP 16	1SYE011816C0001	16 way	16+2	8,665
E-SHC M WP 20	1SYE011820C0001	20 way	20+2	9,270

■ Stock items

Elegance series

Distribution boards

TPN DB - E-SHDB

Horizontal three phase distribution board provision for incomer 8 pole (MCB / Isolator / RCD) and single phase outgoings suitable for both surface & flush mounting.

IP 30

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHDB WD 4	1SYE021504C0001 ■	4 way	8+12	3,830
E-SHDB WD 6	1SYE021506C0001	6 way	8+18	4,320
E-SHDB WD 8	1SYE021508C0001 ■	8 way	8+24	5,080
E-SHDB WD 12	1SYE021512C0001 ■	12 way	8+36	7,455

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHDB M 4	1SYE021604C0001 ■	4 way	8+12	5,150
E-SHDB M 6	1SYE021606C0001	6 way	8+18	5,840
E-SHDB M 8	1SYE021608C0001 ■	8 way	8+24	6,710
E-SHDB M 12	1SYE021612C0001 ■	12 way	8+36	9,765
E-SHDB M 16	1SYE021616C0001 ■	16 way	8+48	10,860

IP 43 with metal door with acrylic

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHDB P 4	1SYE021704C0001	4 way	8+12	5,670
E-SHDB P 6	1SYE021706C0001	6 way	8+18	6,590
E-SHDB P 8	1SYE021708C0001	8 way	8+24	7,450
E-SHDB P 12	1SYE021712C0001	12 way	8+36	11,425

IP 54

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHDB M WP 4	1SYE021804C0001	4 way	8+12	12,635
E-SHDB M WP 6	1SYE021806C0001	6 way	8+18	15,210
E-SHDB M WP 8	1SYE021808C0001	8 way	8+24	16,630
E-SHDB M WP 12	1SYE021812C0001	12 way	8+36	23,435

Elegance series

Distribution boards



Per Phase Isolation DB -E-SHPPI

Horizontal per-phase Isolation distribution board with provision for 8 pole (MCB / Isolator / RCD) as incomer and single phase as outgoing with separate neutral and earth bars for per phase isolation.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SHPPI M 6	1SYE031606C0001 ■	6 way	8+18	8,720
E-SHPPI M 8	1SYE031608C0001 ■	8 way	8+24	10,215
E-SHPPI M 12	1SYE031612C0001 ■	12 way	8+36	13,350
E-SHPPI M 16	1SYE031616C0001 ■	16 way	8+48	15,620



Per Phase Isolation DB -E-SVDB

Tier type per-phase isolation distribution board with provision for 8 pole (MCB / Isolator / RCD) incomer and provision for 2 pole (MCB / Isolator / RCD) as sub-incomers with single phase outgoing with separate neutral and earth bars for per phase Isolation.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SVDB M 6	1SYE041606C0001 ■	6 way	8+6+18	9,900
E-SVDB M 8	1SYE041608C0001 ■	8 way	8+6+24	12,305
E-SVDB M 12	1SYE041612C0001 ■	12 way	8+6+36	14,445

Elegance series

Distribution boards



Vertical DB 8P I/C & SP/TP O/G - E-SVTDB

Vertical three phase distribution board with provision for 8 pole (MCB / Isolator / RCD) incoming with three phase and single phase (TP/SP) outgoing, complete with insulated busbar arrangement.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SVTDB M 4	1SYE061604C0001	4 way	8+12	11,250
E-SVTDB M 6	1SYE061606C0001	6 way	8+18	13,025
E-SVTDB M 8	1SYE061608C0001	8 way	8+24	14,120
E-SVTDB M 12	1SYE061612C0001	12 way	8+36	18,205



Vertical DB 160 A MCCB I/C & SP/TP MCB O/G - E - SVTDB-XT1

Vertical three phase distribution board with provision for 4 pole MCCB (Tmax - XT1) upto 160A as incomer with three phase and single.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SVTDB M 4XT1	1SYE071604C0001	4 way	Tmax XT1+12	12,650
E-SVTDB M 6XT1	1SYE071606C0001	6 way	Tmax XT1+18	14,740
E-SVTDB M 8XT1	1SYE071608C0001	8 way	Tmax XT1+24	16,995
E-SVTDB M 12XT1	1SYE071612C0001	12 way	Tmax XT1+36	21,085



Vertical DB 250 A MCCB I/C & SP/TP MCB O/G - E - SVTDB-XT3

Vertical three phase distribution board with provision for 4 pole MCCB (Tmax - XT3) upto 250A as incomer with three phase and single phase (TP/SP) outgoing, complete with insulated busbar arrangement.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SVTDB M 4XT3	1SYE081604C0001	4 way	250A Tmax XT3+12	23,045
E-SVTDB M 6XT3	1SYE081606C0001	6 way	250A Tmax XT3+18	24,810
E-SVTDB M 8XT3	1SYE081608C0001	8 way	250A Tmax XT3+24	26,185
E-SVTDB M 12XT3	1SYE081612C0001	12 way	250A Tmax XT3+36	27,720



8 Segment DB - E-S8SEG - MCB I/C (Available also in RAL 9003 colour)

Eight segment distribution board with phase segregation and separation between incoming and outgoing with provision for 8P (MCB / Isolator / RCD) + 4P(ACCL provision) as incomer with single phase outgoing with complete wire sets.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-S8SEG M 4	1SYE051604C0001	4 way	8+12+12	11,380
E-S8SEG M 6	1SYE051606C0001	6 way	8+12+18	12,765
E-S8SEG M 8	1SYE051608C0001	8 way	8+12+24	14,210
E-S8SEG M 12	1SYE051612C0001	12 way	8+12+36	18,315
E-S8SEG M4 (RAL 9003)	1SYE151604C0001	4 way	8+12+12	Upon request
E-S8SEG M6 (RAL 9003)	1SYE151606C0001	6 way	8+12+18	
E-S8SEG M8 (RAL 9003)	1SYE151608C0001	8 way	8+12+24	
E-S8SEG M12 (RAL9003)	1SYE151612C0001	12 way	8+12+36	

Elegance series

Distribution boards



Phase Selector DB -E- SPVS

Phase selector DBs-SPVS with inbuilt 3 nos. piano switches and 3 nos. phase selector switch of 63A.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SPVS M 4(63A)	1SYE091604C0001	4 way	8+12	16,940
E-SPVS M 6(63A)	1SYE091606C0001	6 way	8+18	16,940
E-SPVS M 8(63A)	1SYE091608C0001	8 way	8+24	17,820
E-SPVS M 12(63A)	1SYE091612C0001	12 way	8+36	19,140



Flexy tier DB - E-SVFL

Total flexibility as per site needs - configuration as per your choice of incomer & outgoings. Supply bus bars needs to be selected.

IP 43 with metal door

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SVFL M 132	1SYE101632C0001	2 row of 13mod	26	5,940
E-SVFL M 133	1SYE101633C0001 ■	3 row of 13mod	39	7,290
E-SVFL M 134	1SYE101634C0001 ■	4 row of 13mod	52	8,855
E-SVFL M 142	1SYE101642C0001	2 row of 14mod	28	6,390
E-SVFL M 143	1SYE101643C0001 ■	3 row of 14mod	42	7,360
E-SVFL M 144	1SYE101644C0001 ■	4 row of 14mod	56	9,400

Plug & Socket DB - E-SGK

Plug socket boards for single phase and three phase applications up to 63A (supplied completely with plug and socket).

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SGK 20 SP	1SYE111520C0001 ■	20A SP	1	1,880
E-SGK 30 TP	1SYE111530C0001 ■	30A TP	3	4,020
E-SGK 60 FP	1SYE111560C0001 ■	60A FP	4	15,135

Enclosure-E-SEN

Metal enclosures, universal mounting suitable for SP, DP, FP, 6 pole & 8 pole arrangement.

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
E-SEN 2P	1SYE121502C0001 ■	2P Enclosure	2	730
E-SEN 4P	1SYE121504C0001 ■	4P Enclosure	4	735
E-SEN 6P	1SYE121506C0001 ■	6P Enclosure	6	1,005
E-SEN 8P	1SYE121508C0001 ■	8P Enclosure	8	1,200



Busbar SP I/C & SP O/G

Product description	Ordering code	No. of ways	No of modules	Unit MRP (₹)
13Mod Insulated Busbars	1SYE131514C0001 ■	13	13	420
14Mod Insulated Busbars	1SYE131500C0001 ■	14	14	420

Blanking plate

Product description	Ordering code	No. of ways	No. of modules	Unit MRP (₹)
Blank PL	1SYE131513C0001 ■		1	21

■ Stock items

Elegance series

Distribution boards

Cable end box

Product description	Ordering code	No. of ways	Unit MRP (₹)
SPN IP43 SHC			
E-SHC M 4/CEB	1SYE140104C0001	For 4 way SPN IP43 DB	645
E-SHC M 6/CEB	1SYE140106C0001	For 6 way SPN IP43 DB	675
E-SHC M 8/CEB	1SYE140108C0001	For 8 way SPN IP43 DB	785
E-SHC M 10/CEB	1SYE140110C0001	For 10 way SPN IP43 DB	755
E-SHC M 12/CEB	1SYE140112C0001	For 12 way SPN IP43 DB	895
E-SHC M 14/CEB	1SYE140114C0001	For 14 way SPN IP43 DB	880
E-SHC M 16/CEB	1SYE140116C0001	For 16 way SPN IP43 DB	1,010
E-SHC M 20/CEB	1SYE140120C0001	For 20 way SPN IP43 DB	1,125
TPN IP43 SHDB			
E-SHDB M 4/CEB	1SYE140204C0001	For 4 way TPN IP43 DB	1,125
E-SHDB M 6/CEB	1SYE140206C0001	For 6 way TPN IP43 DB	1,185
E-SHDB M 8/CEB	1SYE140208C0001	For 8 way TPN IP43 DB	1,480
E-SHDB M 12/CEB	1SYE140212C0001	For 12 way TPN IP43 DB	1,860
TPN IP43 SHPPI			
E-SHPPI M 6/CEB	1SYE140306C0001	For 6way PPI IP43 DB	1,345
E-SHPPI M 8/CEB	1SYE140308C0001	For 8way PPI IP43 DB	1,845
E-SHPPI M 12/CEB	1SYE140312C0001	For 12way PPI IP43 DB	2,655
TPN IP43 SVDB			
E-SVDB M 6/CEB	1SYE140406C0001	For 6way SVDB IP43 DB	1,175
E-SVDB M 8/CEB	1SYE140408C0001	For 8way SVDB IP43 DB	1,400
E-SVDB M 12/CEB	1SYE140412C0001	For 12way SVDB IP43 DB	1,610
Flexy DB IP43			
E-SVFL 13M/CEB	1SYE140508C0001	For all SVFL 13Mod DBs	1,470
E-SVFL 14M/CEB	1SYE140512C0001	For all SVFL 14Mod DBs	1,780
VTPN IP43 SVTDB			
E-SVTDB M/CEB	1SYE140800C0001	For all SVTDBs(IP43DBs)	2,705
VTPN IP43 XT1 160A			
E-SVTDB M XT1/CEB	1SYE140504C0001	For all SVTDB XT1 DBs(IP43DBs)	3,515
VTPN IP43 XT3 250A			
E-SVTDB MXT3CEB	1SYE140506C0001	For all SVTDB XT3 DBs(IP43DBs)	4,160
8 Segement			
E-S8SEG M4/CEB	1SYE14013C0001	For 4 way 8 Segment DB	2,065
E-S8SEG M6/CEB	1SYE14014C0001	For 6 way 8 Segment DB	2,420
E-S8SEG M8/CEB	1SYE140600C001	For 8 way 8 Segment DB	2,815
E-S8SEG M12/CEB	1SYE140700C001	For 12 way 8 Segment DB	3,455

Classic series

Distribution boards



SPN DB - SHC

IP 30



Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHC WD 4	4 way	4+2	1SYN869006R0001 ■	1,300
SHC WD 6	6 way	6+2	1SYN869007R0001	1,340
SHC WD 8	8 way	8+2	1SYN869008R0001 ■	1,620
SHC WD 10	10 way	10+2	1SYN869006R0010	1,755
SHC WD 12	12 way	12+2	1SYN869009R0001 ■	2,085
SHC WD 14	14 way	14+2	1SYN869010R0001	2,140
SHC WD 16	16 way	16+2	1SYN869006R0016 ■	2,650
SHC WD 20	20 way	20+2	1SYN869006R0020	3,250

IP 43 with metal door



Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHC M 4	4 way	4+2	1SYN869001R0001 ■	1,800
SHC M 6	6 way	6+2	1SYN869002R0001 ■	1,985
SHC M 8	8 way	8+2	1SYN869003R0001	2,340
SHC M 10	10 way	10+2	1SYN869004R0101	2,430
SHC M 12	12 way	12+2	1SYN869004R0001 ■	2,690
SHC M 14	14 way	14+2	1SYN869005R0001	3,130
SHC M 16	16 way	16+2	1SYN869001R0016 ■	3,260
SHC M 20	20 way	20+2	1SYN869001R0020	3,710

Classic series distribution boards are available in ivory color (color code - RAL9010)

■ Stock items

Classic series


Distribution boards



SPN DB - SHC

IP 43 metal door with acrylic

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHC P 4	4 way	4+2	1SYN869011R0041	1,960
SHC P 6	6 way	6+2	1SYN869011R0042	2,225
SHC P 8	8 way	8+2	1SYN869013R0001	2,560
SHC P 10	10 way	10+2	1SYN869013R0002	2,890
SHC P 12	12 way	12+2	1SYN869015R0012	3,095
SHC P 14	14 way	14+2	1SYN869015R0001	3,490
SHC P 16	16 way	16+2	1SYN869011R0161	3,760
SHC P 20	20 way	20+2	1SYN869011R0201	4,275



IP 54

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHC M WP 4	4 way	4+2	1SYN869002R0004	5,060
SHC M WP 6	6 way	6+2	1SYN869004R0020	5,455
SHC M WP 8	8 way	8+2	1SYN869002R0008	6,700
SHC M WP 10	10 way	10+2	1SYN869004R0021	6,890
SHC M WP 12	12 way	12+2	1SYN869002R0012	6,975
SHC M WP 14	14 way	14+2	1SYN869004R0022	7,375
SHC M WP 16	16 way	16+2	1SYN869004R0023	8,520
SHC M WP 20	20 way	20+2	1SYN869002R0013	8,170



TPN DB - SHDB

IP 30

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHDB WD 4	4 way	8+12	1SYN869020R0001 ■	3,335
SHDB WD 6	6 way	8+18	1SYN869021R0001	3,905
SHDB WD 8	8 way	8+24	1SYN869022R0001 ■	4,640
SHDB WD 12	12 way	8+36	1SYN869023R0001 ■	7,145



IP 43 with metal door

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHDB M 4	4 way	8+12	1SYN869016R0001 ■	4,215
SHDB M 6	6 way	8+18	1SYN869017R0001	4,975
SHDB M 8	8 way	8+24	1SYN869018R0001 ■	6,110
SHDB M 12	12 way	8+36	1SYN869019R0001 ■	8,865
SHDB M 16	16 way	8+48	1SYN869004R0025 ■	11,120



IP 43 metal door with acrylic

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHDB P 4	4 way	8+12	1SYN869024R0001	4,720
SHDB P 6	6 way	8+18	1SYN869025R0001	5,865
SHDB P 8	8 way	8+24	1SYN869026R0001	6,655
SHDB P 12	12 way	8+36	1SYN869027R0006	9,280



IP 54

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHDB M WP 4	4 way	8+12	1SYN869001R0004	11,160
SHDB M WP 6	6 way	8+18	1SYN869001R0006	13,435
SHDB M WP 8	8 way	8+24	1SYN869001R0008	14,710
SHDB M WP 12	12 way	8+36	1SYN869004R0027	20,850

■ Stock items

Classic series

Distribution boards



PER PHASE ISOLATION DB - SHPPI

IP 43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SHPPI M 6	6 way	8+18	1SYN8690100R0061	6,985
SHPPI M 8	8 way	8+24	1SYN8690100R0081	8,350
SHPPI M 12	12 way	8+36	1SYN8690100R0121	11,155
SHPPI M 16	16 way	8+48	1SYN8690100R0161	13,570



PER PHASE ISOLATION DB -SVDB

IP 43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SVDB M 6	6 way	8+6+18	1SYN869028R0001	8,940
SVDB M 8	8 way	8+6+24	1SYN869029R0001	10,540
SVDB M 12	12 way	8+6+36	1SYN869030R0001	12,170



IP 43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SVTDB M 4	4 way	8+12	1SYN869031R0001	10,075
SVTDB M 6	6 way	8+18	1SYN869032R0001	11,860
SVTDB M 8	8 way	8+24	1SYN869033R0001	13,460
SVTDB M 12	12 way	8+36	1SYN869034R0001	17,060



IP 43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SVTDB M 4XT1	4 way	Tmax XT1+12	1SYN8690VMXT104	11,810
SVTDB M 6XT1	6 way	Tmax XT1+18	1SYN8690VMXT106	13,515
SVTDB M 8XT1	8 way	Tmax XT1+24	1SYN8690VMXT108	14,540
SVTDB M 12XT1	12 way	Tmax XT1+36	1SYN8690VMXT112	18,670



IP 43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SVTDB M 4XT3	4 way	250A Tmax XT3+12	1SYN8690VMXT304	20,430
SVTDB M 6XT3	6 way	250A Tmax XT3+18	1SYN8690VMXT306	22,465
SVTDB M 8XT3	8 way	250A Tmax XT3+24	1SYN8690VMXT308	24,345
SVTDB M 12XT3	12 way	250A Tmax XT3+36	1SYN8690VMXT312	24,875

Classic series

Distribution boards



7 SEGMENT DB - S7SEG

IP43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
S7SEG M 4	4 way	8+12+12	1SYN869058R0001	10,955
S7SEG M 6	6 way	8+12+18	1SYN869059R0001	12,315
S7SEG M 8	8 way	8+12+24	1SYN869060R0001	13,340
S7SEG M 12	12 way	8+12+36	1SYN869061R0001	15,715



PHASE SELECTOR DB - SPVS

IP43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SPVS M 4(63A)	4 way	8+12	1SYN869100R0001	15,910
SPVS M 6(63A)	6 way	8+18	1SYN869100R0002	16,590
SPVS M 8(63A)	8 way	8+24	1SYN869100R0003	17,065
SPVS M 12(63A)	12 way	8+36	1SYN869100R0004	18,975



FLEXY TIER DB - SVFL

IP43 WITH METAL DOOR

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SVFL M 132	2 row of 13mod	26	1SYN869004R0051	4,900
SVFL M 133	3 row of 13mod	39	1SYN869103R0001	5,970
SVFL M 134	4 row of 13mod	52	1SYN869103R0002	7,850
SVFL M 142	2 row of 14mod	28	1SYN869004R0052	5,650
SVFL M 143	3 row of 14mod	42	1SYN869004R0053	6,850
SVFL M 144	4 row of 14mod	56	1SYN869103R0012	7,950



Plug & Socket DB - SGK

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SGK 20 SP	20A SP	1	1SYN869043R0001 ■	1,620
SGK 30 TP	30A TP	3	1SYN869044R0001 ■	3,910
SGK 60 FP	60A FP	4	1SYN869053R0001 ■	14,875



Enclosure - SEN

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
SEN 2P	2P Enclosure	2	1SYN869055R0001 ■	665
SEN 4P	4P Enclosure	4	1SYN869056R0001 ■	675
SEN 6P	6P Enclosure	6	1SYN869057R0001 ■	945
SEN 8P	8P Enclosure	8	1SYN869004R0029 ■	1,085

BUSBAR SP I/C & SP O/G, BLANKING PLATE

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
13 Module Pin type Busbars	13	13	1SYN360025P0001 ■	400
14 Module Pin type Busbars	14	14	1SYN869103R0013 ■	400

BLANKING PLATE

Product description	No. of ways	No. of modules	Ordering code	Unit MRP (₹)
Blank PL		1	1SYN869004R0059 ■	21

Classic series

Distribution boards

One way MCCB enclosures

XT1 MCCB ENCL 1,925

Product description	No. of ways	Ordering code	Unit MRP (₹)
XT1 TP MCCB Enclosure	3 pole	1SYT121503C0001	1,690
XT1 FP MCCB Enclosure	4 pole	1SYT121504C0001	1,925

XT3 MCCB ENCL

Product description	No. of ways	Ordering code	Unit MRP (₹)
XT3 TP MCCB Enclosure	3 pole	1SYT321503C0001	1,925
XT3 FP MCCB Enclosure	4 pole	1SYT321504C0001	2,155

A1 MCCB ENCL

Product description	No. of ways	Ordering code	Unit MRP (₹)
A1 TP MCCB Enclosure	3 pole	1SYA121503C0001	1,925
A1 FP MCCB Enclosure	4 pole	1SYA121504C0001	2,040

A2 MCCB ENCL

Product description	No. of ways	Ordering code	Unit MRP (₹)
A2 TP MCCB Enclosure	3 pole	1SYA221503C0001	2,040
A2 FP MCCB Enclosure	4 pole	1SYA221504C0001	2,100

Plug and Sockets in Metal Enclosure with MCB/RCCB Provision

Product Description	No of Ways	No of Modules	Product Code	Unit MRP (₹)
216RAUSPNE	16A 3 PIN (2P+E) Socket with Enclosure	2	1SYN880110R0001	2,655
232RAUSPNE	32A 3 PIN (2P+E) Socket with Enclosure	2	1SYN880113R0001	2,890
263RAUSPNE	63A 3 PIN (2P+E) Socket with Enclosure	2	1SYN880116R0001	11,100
316RAU6TPE	16A 4 PIN (3P+E) Socket with Enclosure	3	1SYN880111R0001	2,960
332RAU6TPE	32A 4 PIN (3P+E) Socket with Enclosure	3	1SYN880114R0001	3,190
363RAU6TPE	63A 4 PIN (3P+E) Socket with Enclosure	3	1SYN880117R0001	11,705
416RAU6TPNE	16A 5 PIN (4P+E) Socket with Enclosure	4	1SYN880112R0001	3,290
432RAU6TPNE	32A 5 PIN (4P+E) Socket with Enclosure	4	1SYN880115R0001	4,095
363RAU6TPE	63A 5 PIN (4P+E) Socket with Enclosure	4	1SYN880118R0001	12,175

Classic series

Distribution boards

Cable end box

Product description	Ordering code	No. of ways	Unit MRP (₹)
SPN IP43 SHC			
SHC M 4/CEB	1SYN869103R0014	For 4 way SPN IP 43 DB	585
SHC M 6/CEB	1SYN869103R0015	For 6 way SPN IP43 DB	640
SHC M 8/CEB	1SYN869004R0082	For 8 way SPN IP43 DB	660
SHC M 10/CEB	1SYN869004R0083	For 10 way SPN IP43 DB	700
SHC M 12/CEB	1SYN869004R0084	For 12 way SPN IP43 DB	790
SHC M 14/CEB	1SYN869004R0085	For 14 way SPN IP43 DB	865
SHC M 16/CEB	1SYN869004R0086	For 16 way SPN IP43 DB	1,050
SHC M 20/CEB	1SYN869004R0087	For 20 way TPN IP43 DB	1,305
TPN IP43 SHDB			
SHDB M 4/CEB	1SYN869004R0088	For 4 way TPN IP43 DB	985
SHDB M 6/CEB	1SYN869004R0089	For 6 way TPN IP43 DB	1,010
SHDB M 8/CEB	1SYN869004R0090	For 8 way TPN IP43 DB	1,485
SHDB M 12/CEB	1SYN869004R0091	For 12 way TPN IP43 DB	1,635
TPN IP43 SHPPI			
SHPPI M 6/CEB	1SYN869004R0093	For 6 way PPI IP43 DB	1,140
SHPPI M 8/CEB	1SYN869004R0094	For 8 way PPI IP43 DB	1,570
SHPPI M 12/CEB	1SYN869004R0095	For 12 way PPI IP43 DB	2,250
SHPPI M 16/CEB	1SYN869004R0096	For 16 way PPI IP43 DB	2,440
TPN IP43 SVDB			
SVDB M 6/CEB	1SYN869004R0097	For 6 way SVDB IP43 DB	1,215
SVDB M 8/CEB	1SYN869004R0098	For 8 way SVDB IP43 DB	1,230
SVDB M 12/CEB	1SYN869004R0099	For 12 way SVDB IP43 DB	1,420
Flexy DB IP43			
SVFL 13M/CEB	1SYN869004R0103	For all SVFL 13Mod DBs	1,300
SVFL 14M/CEB	1SYN869004R0104	For all SVFL 14Mod DBs	1,580
VTPN IP43 SVTDB			
SVTDB M/CEB	1SYN869004R0100	For all SVTDBs(IP43DBs)	2,410
VTPN IP43 XT1 160A			
SVTDB M XT1 160/CEB	1SYN869004C0101	For all SVTDB XT1 160 DBs(IP43DBs)	3,055
VTPN IP43 XT3 250A			
SVTDB M XT3 250/CEB	1SYN869004C0103	For all SVTDB XT3 250 DBs(IP43DBs)	3,585
7 Segment CB			
S7SEG M4/CEB	1SYN141013C0001	For 4 way 7 SEG IP43 DB	1,845
S7SEG M6/CEB	1SYN141014C0001	For 6 way 7 SEG IP43 DB	2,155
S7SEG M8/CEB	1SYN140600C0001	For 8 way 7 SEG IP43 DB	2,515
S7SEG M12/CEB	1SYN140700C0001	For 12 way 7 SEG IP43 DB	3,085

Complete range

Customization in ABB Distribution Enclosures available on request*

- Enclosures-TV/TEL/IOT related backend devices
- Enclosures-SPD provision
- Pre-wired distribution boards
- Indication lamps provision
- MCCB enclosures

Mistral IP 65 enclosures

A point of reference. For simplicity and effectiveness

A complete series, versatile and easy to install

Efficiency, safety, integration: the new System pro E comfort MISTRAL65 series rests on the strengths which have consolidated ABB's image over the years for its expertise and reliability in the area of products for protection, control, monitoring, measurement, safety and energy efficiency. These innovative IP65 rated consumer units complete

ABB's wide product range for the industrial sector. The result of constant research and constant attention paid to technological development, the System pro E comfort c consumer units are designed to satisfy all requirements electrical installers might have.



Description	No. modules	No. of rows	Dimensions WxHxD	Order code	L.P. (₹)
Mistral65 transparent door 4M	4	1	52x202x117	1SL1200A00	2,500
Mistral65 transparent door 8M	8	1	232x250x154	1SL1201A00	4,040
Mistral65 transparent door 12M	12	1	320x250x155	1SL1202A00	5,370
Mistral65 transparent door 18M	18	1	430x250x155	1SL1203A00	6,810
Mistral65 transparent door 24M	24	2	320x435x155	1SL1204A00	8,345
Mistral65 transparent door 36M 2F	36	2	430x435x155	1SL1205A00	13,290
Mistral65 transparent door 36M 3F	36	3	320x600x155	1SL1206A00	13,290
Mistral65 transparent door 54M	54	3	430x600x155	1SL1208A00	19,170



Gemini switchboard

Distribution boards

ABB SACE's Gemini range is revolutionizing the market of low voltage electric insulating switchboards. The reason for this is that it is the first switchboard made in thermoplastic material, to which the co-injection molding technique gives the same mechanical characteristics as polyester. This means that it is extremely sturdy, with its rigid covering and expanded internal

core. Moreover, it contains no fiber glass, a material that with time rises to the surface, jeopardizing the functioning and safety of switchboards made in polyester with which it is usually mixed. Available in 6 different sizes with transparent or opaque door, the Gemini switchboards are suitable for installation in any application context.




Compliance with standard	IEC60670, EN 50298, 60439-1, 62208, 61439 – 1 & 2
Rated service voltage	1000V AC
Degree of protection	IP 30 open door / IP66 closed door

* Details available on request

Millenium

Thanks to a combined system, the switches of the Millenium series provide a comprehensive range of solutions for single rooms or whole building concepts. The square and ultra slim switches do not only add quality and style to the overall building, but are also easy to install.



01



02


NEW



05



03



04

NEW



06



07



08



09



10

- 01 Stainless Steel
- 02 Silk Black *
- 03 Antique Gold
- 04 Matt Gold
- 05 White Glass **
- 06 Black Glass **
- 07 Stainless Steel and Silk Black
- 08 Silk Black and Stainless Steel
- 09 Antique Gold and Silk Black
- 10 Matt Gold and Silk Black

* Silk Black not suitable to installation outdoors
 ** Cover frame made of real glass



Modern and contemporary 4 finishes made in real stainless steel material AISI 304 and 2 finishes made in glass to complete the elegant finishes of Millenium: Stainless Steel, Silk Black, Antique Gold, and Matt Gold, White Glass and Black Glass.

Designed by the famous European designer Josep LLuscá.



Slim line design, only 4 mm high with straight and square lines at the forefront. Rocker with attractive chrome profile that gives a distinctive glance.


Range with wide rocker and metal finish. Screwless front plate ultra slim design.




Zenit

The highlight of modular series

Zenit is the most comprehensive modular range for all kind of homes and commercial buildings. A number of appreciated designs and beautiful finishes that add value to the facility, with advanced features that provide greater comfort and performance level. With Zenit you can make any type of installation, can enjoy benefit of technical advantages that make it easier and faster. This range has the guarantee of a brand renowned for its quality such as ABB.

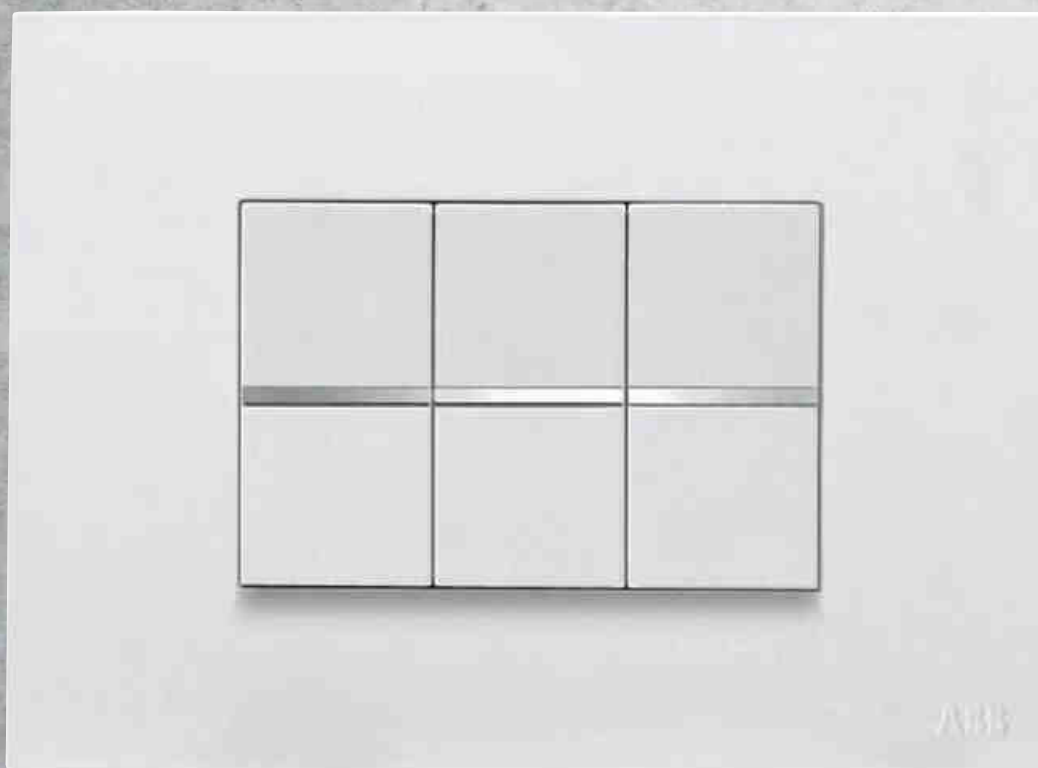

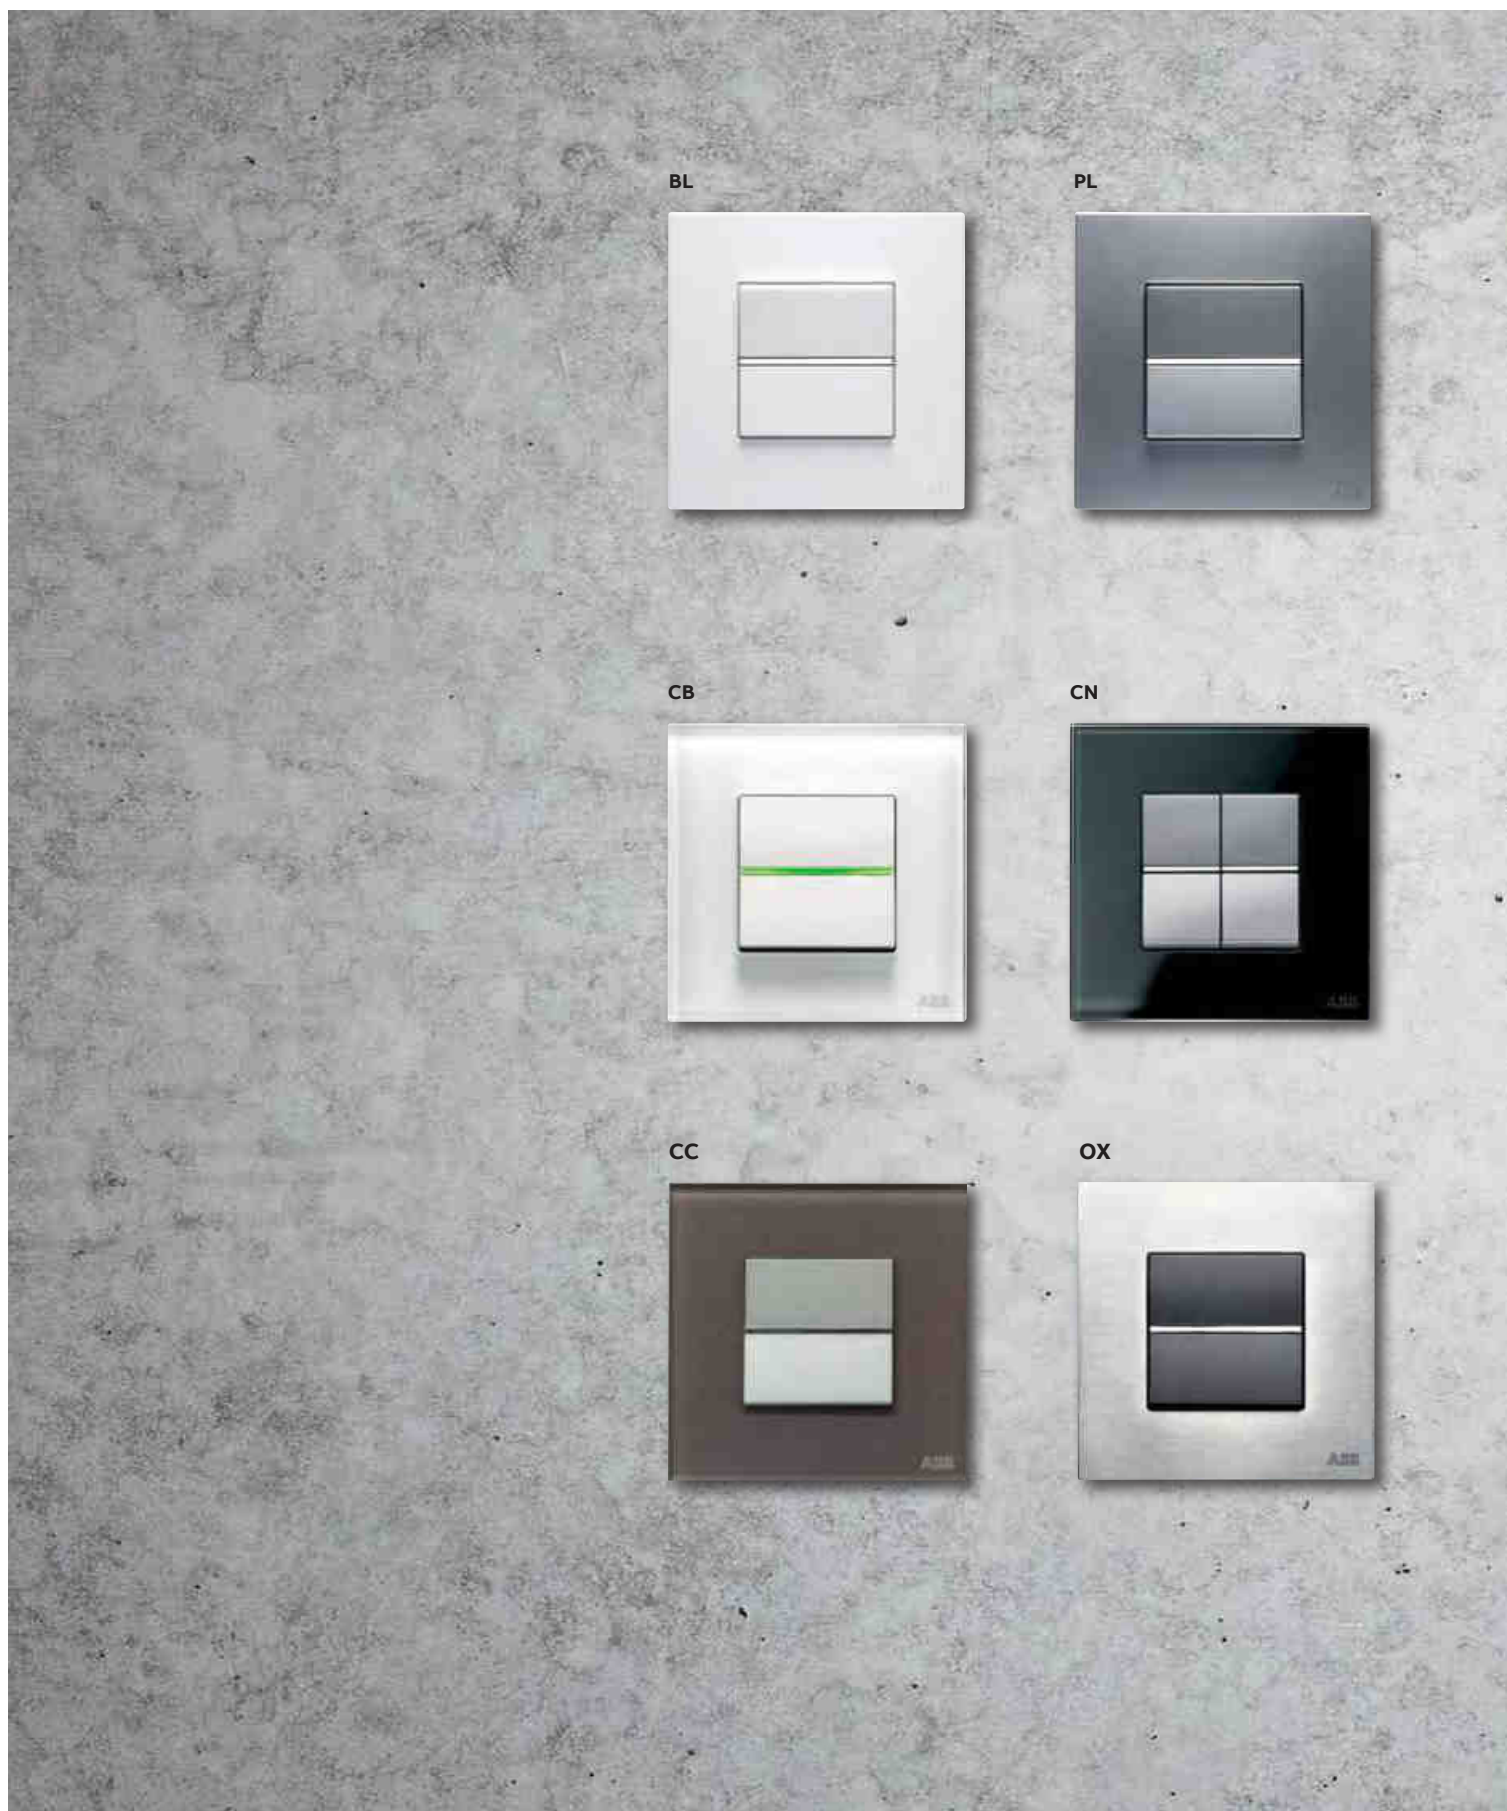

Zenit


BL White
PL Silver
AN Anthracite
CV Champagne

Zenit Noble

CB White Glass
CN Black Glass
CF Graphite Glass
CH Champagne Glass
CP Pearl Glass

CC Coffee Glass
OX Stainless Steel
WG Wenge
PZ Slate


AN



CV



CP



CF



CH



WG



PZ



Wiring accessories

IVIE

Switch to the future

IVIE is the latest premium modular range of wiring accessories designed to address various functionalities. These include basic switching, controlling, comfort and energy saving.

The IVIE range innovatively matches your interiors and aesthetically brings out the best in your comfort zone. The enhanced design for reliable performance of this range is for the passionate, compassionate, intuitive and magnetic personality within each one of us.

The IVIE range, includes the tastefully selected color options, caters to the needs of various segments like residential, commercial and hospitality.

IVIE with its ability to integrate home automation solutions in your existing switch box, makes the range future proof.

IVIE truly makes you want to switch to the future.


Sleek and convex design in different finishes

Thanks to the complete system, The IVIE series provides a comprehensive range of solutions for building concepts. The convex and sleek design not only provides quality and style to the overall building, but is easy to install.

01



02

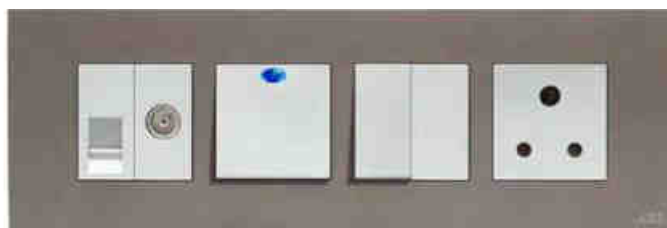

03



Different finishes and combinations:

01 Anthracite grey mechanisms in Silver plate

02 Silver mechanisms in Anthracite Grey plate

03 Anthracite grey mechanisms in White plate

Flexibility in design which provides total control

The IVIE range is the first Indian range to incorporate wired and wireless home automation systems together. This range can be integrated with

ABB-free@home® home automation system, which is the most intelligent way of managing spaces with energy saving.



Great comfort, safety and energy efficiency for buildings

ABB-free@home® sensor for switching control, blind control, dimming and scene control.



IVIE complete range

IVIE mechanisms - White



1SYK100001A1001



1SYK100001A1007



1SYK100001A1008



1SYK100001
A1003



1SYK100001
A1005



1SYK100001A1028



1SYK100001A1023



2CLA218500
N1102



2CLA228500
N1102



1SYK100001A1041

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 6 A - 240 V ~				
IIS10610 BL - 6A 1 way switch	1	20/400	1SYK100001A1001	160
IIS10620 BL - 6A 2 way switch	1	20/400	1SYK100001A1002	270

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 16 A - 240 V ~				
IIS11610 BL - 16A 1 way switch	1	20/400	1SYK100001A1006	355
IIS1161L BL - 16A 1 way switch with indicator	1	20/400	1SYK100001A1007	425

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 32 A - 240 V ~				
IIS2321L BL - 32A, DP switch	2	10/200	1SYK100001A1008	1,145

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Bell Push				
IIS106B0 BL - 6A Bell switch	1	20/400	1SYK100001A1003	300
IIS106BL BL - 6A Bell switch with indicator	1	20/400	1SYK100001A1004	380
IIS206BL BL - 6A Mega Bell switch with indicator	2	10/200	1SYK100001A1005	520

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Sockets				
IIK20306 BL 6A 3Pin Socket	2	10	1SYK100001A1028	375
IIK20616 BL - 6/16A socket	2	10/200	1SYK100001A1023	510
N2238 BL - Euro-American earthed socket outlet, 125/250V AC, 15/16A, 2 P+E	2	10	2CLA223800N1102	Upon request
N2135 BL - Euro-American unearthed socket outlet, 125/250V AC, 15/16A, 2 P	1	20	2CLA213500N1102	
N2237 BL - British standard socket outlet, 250V AC, 13A, 2 P+E	2	10	2CLA223700N1102	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
USB chargers				
N2185 BL - USB charger 0.75A, 100-240V	1	1	2CLA218500N1102	Upon request
N2185.2 BL - USB charger 2A, 100-230V	1	1	2CLA218520N1102	
N2285 BL - USB charger 1.5A, 100-240V	2	1	2CLA228500N1102	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Blank plates				
IIM1BLNK BL - blank plate	1	20/400	1SYK100001A1041	65

IVIE complete range

IVIE mechanisms - White



15YK100001A1042



15YK100001A1045



2CLA226020N1102



2CLA226030N1102



2CLA226080N1102



2CLA226090N1102



15YK100001A1047



15YK100001A1049



15YK100001A1051

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Dimmer & fan regulators				
IIM2FR05 BL - step fan regulator 5 step	2	5/100	1SYK100001A1042	1,140
IIM1FR04 BL - step fan regulator 4 step	1	10/200	1SYK100001A1043	990
IIM2D400 BL - dimmer 400 watt	1	10/200	1SYK100001A1045	1,300
N2260.2 BL - Universal rotatory/push dimmer, 230V • Rated voltage: 230 V AC • Max. power: incandescent: 500 Watt halogen lamp with electronic transformer: 500 VA • Halogen lamp with ferromagnetic transformer: 400 VA	2	1	2CLA226020N1102	Upon request
N2260.3 BL - LED rotatory/push dimmer, 230V • Rated voltage: 230 V AC • Nominal power: 250 W/VA Power (min./max load): LEDi: 2/100 W/VA (max. 10 lamps) • Dimmable energy saving lamps: 2/100 W/VA (max. 10 lamps) • LV LEDi with transformer (only type L or LC): 4/100 W/VA (max. 10 lamps) • Incandescent lamps: 10/250 W/VA • Halogen lamps: 10/250 W/VA • LV halogen with transformer (only type L or LC): 10/250 W/VA (max. 10 lamps) • 2 wire connection. Optional: auxiliary on/off with 2-way switch N2X02	2	1	2CLA226030N1102	
N2260.8 BL - LED rotatory/push dimmer • Rated voltage: 127 V AC, Frequency: 50/60 Hz (Nominal power: 140 W/VA) • Power (min./max load): LEDi: 2/55 W/VA (max. 10 lamps) • Dimmable energy saving lamps: 2/55 W/VA (max. 10 lamps) • LV LEDi with transformer (only type L or LC): 4/55 W/VA (max. 10 lamps) • Incandescent lamps: 10/140 W/VA • Halogen lamps: 10/140 W/VA • LV halogen with transformer (only type L or LC): 10/140 W/VA (max. 10 lamps)	2	1	2CLA226080N1102	
N2260.9 BL - 1-10V rotary dimmer • Rated voltage: 127 - 230 V AC/50 - 60 Hz • Max. power: 230 Vac: 700 VA • 127 V AC: 350 VA • Max. 6 ballasts per device	2	1	2CLA226090N1102	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Data & voice				
IIM1RJ11 BL - RJ11 Tel. jack 2 pin	1	20/400	1SYK100001A1047	255
IIM1RJ45 BL - RJ45 Jack cat 6	1	20/400	1SYK100001A1048	870

Type reference and description	Number of modules	Std Pack	Ordering code	Unit M.R.P.(₹)
TV Socket				
IIM1TVSK BL - TV co-axial socket	1	20/400	1SYK100001A1049	260

Type reference and description	Number of modules	Std Pack	Ordering code	Unit M.R.P.(₹)
Starters				
IIM2ST20 BL - Single Phase Starter 20A	2	5/100	1SYK100001A1051	985
IIM2ST25 BL - Single Phase Starter 25A	2	5/100	1SYK100001A1052	1,005

IVIE complete range

IVIE mechanisms - White



1SYK100001A1055



2CLA224450N1102 2CLA218050N1102
2CLA218040N1102



2CLA221410N1102



1SYK100001A1059



2CLA215520N1102 2CLA215530N1102



2CLA215540N1102 2CLA215560N1102



2CLA224100N1102



1SYK100001A1054



2CLA211900N1102 2CLA221900N1102



1SYK100001A1053

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
DND & MMR				
IIM1DND5 BL - DND and MMR set internal & external	2+3	5/100	1SYK100001A1055	1,930
N2244.5 BL - DND and MUR 2-gang interlocked switch	2	5	2CLA224450N1102	Upon request
N2180.5 BL - LED MUR signaling light	1	5	2CLA218050N1102	
N2180.4 BL - LED DND signaling light	1	5	2CLA218040N1102	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Key card switches				
N2214.1 BL - Card switch 1-gang, 1-way, DP	2	1	2CLA221410N1102	Upon request

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Down lighter				
IIM3DOWN BL-down lighter	3	5/100	1SYK100001A1059	750

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Audio & video connector				
N2155.2 BL - 2x RCA connection unit	1	1	2CLA215520N1102	Upon request
N2155.3 BL - 3x RCA connection unit	1	1	2CLA215530N1102	
N2155.4 BL - Mini-Jack connection unit	1	1	2CLA215540N1102	
N2155.5 BL - VGA connection unit	1	1	2CLA215550N1102	
N2155.6 BL - HDMI connection unit	1	1	2CLA215560N1102	
N2155.7 BL - HDMI female-female connection unit	1	1	2CLA215570N1102	
N2155.8 BL - USB connection unit	1	1	2CLA215580N1102	
N2155.9 BL - USB female-female connection unit	1	1	2CLA215590N1102	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Motion sensor				
N2241 BL - 110° motion sensor • Max. power: Incandescent: 1,800W @230V AC/1,000W @127V AC • Halogen with electronic or ferromagnetic transformer: 750VA @230V AC/400VA @127V AC - Fluorescent lamps or motors: 400VA @230V AC/200VA @127V AC • For automatic switching of devices dependent on motion and brightness • With integrated selector switch for automatic ON-OFF in the front side • Switch-off delay: 10 sec to 10 min or short-time pulse 1 sec adjustable (from the front side) • Detection range: 5 m radius • Adjustable light set point level for activation (from the front side) • Detection angle: 110° Mounting height: 1, 2 m Auxiliary control with N2X04.X push-buttons	2	1	2CLA224100N1102	Upon request

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Buzzer & door bell				
IIM2BUZR BL - Buzzer	2	5/100	1SYK100001A1054	520
N2119 BL - Buzzer	1	1	2CLA211900N1102	Upon request
N2219 BL - Buzzer	2	1	2CLA221900N1102	
N2224 BL - Electronic door bell 230 V AC	2	1	2CLA222400N1102	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Indicator				
IIM1INDI BL - Indicator	1	20/400	1SYK100001A1053	395

IVIE complete range

IVIE mechanisms - White



2CLA218000N1602

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Signaling light				
N2180 BL - L ED white signaling light, Lamp: white LED Luminous flux: > 2 lumen at 1 meter, white diffuser	1	5	2CLA218000N1102	Upon request
N2180 RJ - LED red signaling light, Lamp: white LED Luminous flux: > 2 lumen at 1 meter, Red diffuser	1	1	2CLA218000N1602	
N2180 VD - N2180 VD, Lamp: white LED Luminous flux: > 2 lumen at 1 meter, Green diffuser	1	1	2CLA218000N1802	
N2280 BL - LED signaling light, Lamp: white LED Luminous flux: > 2 lumen at 1 meter, White diffuser	2	1	2CLA228000N1102	
N2281 BL - Beacon LED light, Lamp: white LED Luminous flux: > 2 lumen at 1 meter, white diffuser, Autonomy: 3 hours (1 hour at maximum illumination 2 hours with lower illumination), Battery: Ni-MH (estimated lifetime: 4 years)	2	1	2CLA228100N1102	



2CLA814050
A1002



2CLA224050
N1102

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Thermostat				
8140.5 - Digital room thermostat • Maximum load: 3A cos = 0,5 • Output relay operation modes: Hysteresis: 0.5° C • Pulse-width modulation: with a ±4°C difference with the set-point temperature • Variable from 100% to 0% modulation • To be installed with N2240.5 cover plates	2	1	2CLA814050A1002	Upon request
N2240.5 BL - Cover plate for digital thermostat - 2M	2	1	2CLA224050N1102	



2CLA936810A1001



2CLA936820
A1001



2CLA225710
N1102

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Sound				
9368.1 - Multiroom sound module	1	1	2CLA936810A1001	Upon request
9368.2 - Remote control for multiroom sound module	2	1	2CLA936820A1001	
N2268 BL - Cover plate for radio/remote control modules	-	1	2CLA226800N1102	
9368- FM - Radio and alarm module	2	1	2CLA936800A1001	
N2268 BL - Cover plate for radio/remote control modules	-	1	2CLA226800N1102	
9368.3 - Auxiliary module	2	1	2CLA936830A1001	
N2268.3 BL - Cover plate for I/O + USB + Bluetooth module	-	1	2CLA226830N1102	
N2257.1 BL - Speaker connection unit	2	1	2CLA225710N1102	

* More details will be provided upon request



1SYK100001
A1071



1SYK100001
A1072



1SYK100001
A1073



1SYK100001
A1074



1SYK100001A1077



1SYK100001A1079

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
White plate with frame				
IIP0133 BL - 1M plate	1	15/360	1SYK100001A1071	195
IIP0233 BL - 2M plate	2	15/360	1SYK100001A1072	210
IIPP343 BL - 3M plate power	3	10/240	1SYK100001A1073	220
IIP0343 BL - 3M plate	3	10/240	1SYK100001A1074	290
IIP0453 BL - 4M plate	4	10/190	1SYK100001A1075	315
IIP0683 BL - 6M plate	6	5/120	1SYK100001A1076	435
IIP0893 BL - 8M plate	8	5/120	1SYK100001A1077	510
IIP0855 BL - 8M plate square	8	5/95	1SYK100001A1078	580
IIP1286 BL - 12M plate	12	5/95	1SYK100001A1079	630
IIP1888 BL - 18M plate	18	5/40	1SYK100001A1080	995

IVIE complete range

IVIE mechanisms - Anthracite Grey



1SYK100001A1201



1SYK100001A1207



1SYK100001A1208



1SYK100001
A1203



1SYK100001
A1205



1SYK100001A1128



1SYK100001A1223



2CLA218500
N1802



1SYK100001A1241

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 6 A - 240 V ~				
IIS10610 AN - 6A 1 way switch	1	20/400	1SYK100001A1201	220
IIS10620 AN - 6 A 2 way switch	1	20/400	1SYK100001A1202	305

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 16 A - 240 V ~				
IIS11610 AN - 16A 1 way switch	1	20/400	1SYK100001A1206	395
IIS1161L AN - 16A 1 way switch with ind.	1	20/400	1SYK100001A1207	495

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 32 A - 240 V ~				
IIS2321L AN - 32A, DP switch	2	10/200	1SYK100001A1208	1,365

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Bell Push - 240 V ~				
IIS106B0 AN - 6A Bell Switch	1	20/400	1SYK100001A1203	350
IIS106BL AN - 6A Bell Switch with ind.	1	20/400	1SYK100001A1204	445
IIS206BL AN - 6A Mega Bell switch with ind.	2	10/200	1SYK100001A1205	610

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Sockets - 240 V ~				
IIK20616 AN - 6/16A socket	2	10/200	1SYK100001A1223	604
IIK20306 AN - 6A, 3Pin socket	2	10/200	1SYK100001A1228	420
N2238 AN - Euro-American earthed socket outlet, Rated current: 15/16A, 2P+E/NEMA 5-15R	2	10	2CLA223800N1802	Upon request
N2135 AN - Euro-American unearthed socket outlet, Rated current: 15/16A, 2P (non-earthed)/NEMA 1-15R	1	20	2CLA213500N1802	
N2237 AN - British standard socket outlet, Rated current: 13A, 2P+E	2	10	2CLA223700N1302	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
USB chargers				
N2185 AN - USB charger 750mA, 1-gang	1	1	2CLA218500N1802	Upon request
N2185.2 AN - USB charger 2.000mA, 1-gang	1	1	2CLA218520N1802	
N2285 AN - USB charger 1.500mA, 2-gang	2	1	2CLA228500N1802	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Blank plates				
IIM1BLNK AN - Blank plate	1	20/400	1SYK100001A1241	120

IVIE complete range

IVIE mechanisms - Anthracite Grey



1SYK100001A1242



2CLA226020N1802



2CLA226030N1802



2CLA226080N1802



2CLA226090N1802



1SYK100001A1247



1SYK100001A1249



1SYK100001A1257



1SYK100001A1255



Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Motion sensor				
IIM2FR05 AN - Step fan regulator 5 step	2	5/100	1SYK100001A1242	1,317
IIM1FR04 AN - Step fan regulator 4 step	1	10/200	1SYK100001A1243	1,165
IIM1D400 AN - Dimmer 400 Watt	1	10/200	1SYK100001A1245	1,489

N2260.2 AN - Universal rotatory/push dimmer • Rated voltage: 230 V AC • Max. power: Incandescent: 500 W • Halogen lamp with electronic transformer: 500 VA • Halogen lamp with ferromagnetic transformer: 400 VA

N2260.3 AN - LED rotatory/push dimmer • Rated voltage: 230 V AC • Nominal power: 250 W/VA • Power (min./max load): LEDi: 2/100 W/VA (max. 10 lamps). Dimmable energy saving lamps: 2/100 W/VA (max. 10 lamps) • LV LEDi with transformer (only type L or LC): 4/100 W/VA (max. 10 lamps) • Incandescent lamps: 10/250 W/VA • Halogen lamps: 10/250 W/VA • LV halogen with transformer (only type L or LC): 10/250 W/VA (max. 10 lamps) • 2 wire connection • Optional: auxiliary on/off with 2-way switch N2X02

N2260.8 AN - LED rotatory/push dimmer • Rated voltage: 127 V AC • Frequency: 50/60 Hz (Nominal power: 140 W/ VA) • Power (min./max load): LEDi: 2/55 W/VA (max. 10 lamps) • Dimmable energy saving lamps: 2/55 W/VA (max. 10 lamps) • LV LEDi with transformer (only type L or LC): 4/55 W/VA (max. 10 lamps) • Incandescent lamps: 10/140 W/VA • Halogen lamps: 10/140 W/VA • LV halogen with transformer (only type L or LC): 10/140 W/VA (max. 10 lamps)

N2260.9 AN - 1-10V rotary dimmer • Rated voltage: 127 - 230 V AC / 50 - 60 Hz • Max. power: 230 V AC: 700 VA • 127 V AC: 350 VA • Max. 6 ballasts per device

Upon request

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Data & Voice				
IIM1RJ11 AN - RJ11 Tel. jack 2 pin	1	20/400	1SYK100001A1247	305
IIM1RJ45 AN - RJ45 Jack cat 6	1	20/400	1SYK100001A1248	995

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
TV socket				
IIM1TVSK AN - TV co-axial socket	1	20/400	1SYK100001A1249	362

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Shaver socket				
IIM2SVSK AN - Shaver Socket	2	5/100	1SYK100001A1257	1,800

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
DND & MMR				
IIM1DNDS AN - DND and MMR set internal & external	2+3	5/100	1SYK100001A1255	2,162
N2244.5 AN - DND and MUR 2-gang interlocked switch	2	1	2CLA224450N1802	Upon request
N2180.4 AN - LED MUR signaling light	1	1	2CLA218050N1802	
N2180.4 AN - LED DND signaling light	1	1	2CLA218040N1802	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Key card switches				
- Card switch 1-gang, 1-way, DP	2	1	2CLA221410N1802	Upon request

IVIE complete range

IVIE mechanisms - Anthracite Grey



1SYK100001A1259



2CLA215520
N1802



2CLA215530
N1802



2CLA215540
N1802



2CLA215550
N1802



2CLA215560
N1802



2CLA215580
N1802

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Down lighter				
IIM3DOWN AN - Down lighter	3	5/100	1SYK100001A1259	1,127

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Audio & Video Connector				
N2155.2 AN - 2x RCA connection unit	1	1	2CLA215520N1802	Upon request
N2155.3 AN - 3x RCA connection unit	1	1	2CLA215530N1802	
N2155.4 AN - Mini-Jack connection unit	1	1	2CLA215540N1802	
N2155.5 AN - VGA connection unit	1	1	2CLA215550N1802	
N2155.6 AN - HDMI connection unit	1	1	2CLA215560N1802	
N2155.7 AN - HDMI female-female connection unit	1	1	2CLA215570N1802	
N2155.8 AN - USB connection unit	1	1	2CLA215580N1802	
N2155.9 AN - USB female-female connection unit	1	1	2CLA215590N1802	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Motion Sensor				
N2241 AN - 110° motion sensor • Max. power: Incandescent: 1.800W @230V AC/1.000W @127V AC • Halogen with electronic o ferromagnetic transformer: 750VA @230V AC/400VA @127V AC • Fluorescent lamps or motors: 400VA @230V AC/200VA @127V AC • For automatic switching of devices dependent on motion and brightness • With integrated selector switch for automatic ON-OFF in the front side • Switch-off delay: 10 sec. to 10 min. or short-time pulse 1 sec adjustable (from the front side) • Detection range: 5 m radius Adjustable light set point level for activation (from the front side) • Detection angle: 110° Mounting height: 1, 2 m auxiliary control with N2X04.X push-buttons	2	1	2CLA224100N1802	Upon request

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Buzzer & Door Bell				
IM2BUZR AN - Buzzer	2	5/100	1SYK100001A1254	765
N2119 AN - Buzzer	1	1	2CLA211900N1802	Upon request
N2219 AN - Buzzer	2	1	2CLA221900N1802	
N2224 AN - Electronic door bell 230 V AC	2	1	2CLA222400N1802	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Indicator				
IIM1INDI AN - Indicator	1	20/400	1SYK100001A1253	448

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Thermostat				
N2240.5 AN - Cover plate for digital thermostat	2	1	2CLA224050N1802	Upon request



2CLA211900
N1802



2CLA221900
N1802

IVIE complete range


IVIE mechanisms - Anthracite Grey



Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Anthracite plate with frame				
IIP0133 AN - 1M plate	1	15/360	1SYK100001A1271	436
IIP0233 AN - 2M plate	2	15/360	1SYK100001A1272	452
IIPP343 AN - 3M plate power	3	10/240	1SYK100001A1273	515
IIP0343 AN - 3M plate	3	10/240	1SYK100001A1274	614
IIP0453 AN - 4M plate	4	10/190	1SYK100001A1275	772
IIP0683 AN - 6M plate	6	5/120	1SYK100001A1276	966
IIP0893 AN - 8M plate	8	5/120	1SYK100001A1277	1,118
IIP0855 AN - 8M plate square	8	5/95	1SYK100001A1278	1,213
IIP1286 AN - 12M plate	12	5/95	1SYK100001A1279	1,622
IIP1888 AN - 18M plate	18	5/40	1SYK100001A1280	2,284

IVIE installation system

IVIE series is a grid type system enabling combination of colours and products of different dimensions and functionalities, together with ABB-free@home® sensors that have to be composed with the required frame, in order to have the right assortment of functionality and design.

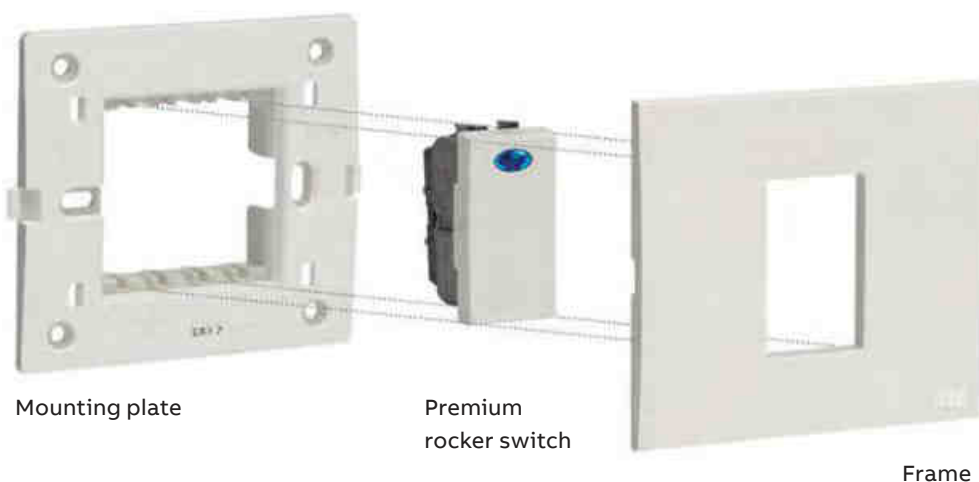

IVIE complete range

IVIE mechanisms - Silver



SYK100001A1101



1SYK100001A1107



1SYK100001A1108



1SYK100001
A1003



1SYK100001
A1105



1SYK100001A1128



1SYK100001A1123

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 6 A - 240 V ~				
IIS10610 PL - 6A 1 way switch	1	20/400	1SYK100001A1101	220
IIS10620 PL - 6A 2 way switch	1	20/400	1SYK100001A1102	305

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 16 A - 240 V ~				
IIS11610 PL - 16A 1 way switch	1	20/400	1SYK100001A1106	395
IIS1161L PL - 16A 1 way switch with Ind.	1	20/400	1SYK100001A1107	495

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Switch 32 A - 240 V ~				
IIS2321L PL - 32A, DP switch	2	10/200	1SYK100001A1108	1,365

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Bell Push - 240 V ~				
IIS106B0 PL - 6A Bell Switch	1	20/400	1SYK100001A1103	350
IIS106BL PL - 6A Bell Switch with Ind.	1	20/400	1SYK100001A1104	445
IIS206BL PL - 6A Mega bell switch with Ind.	2	10/200	1SYK100001A1105	610

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Sockets - 240 V ~				
IIK20616 PL - 6/16A socket	2	10/200	1SYK100001A1123	604
IIK20306 PL - 6A, 3Pin socket	2	10/200	1SYK100001A1128	420
N2238 PL - Euro-American earthed socket outlet, Rated voltage: 125/250 Vac, Rated current: 15/16A. 2P+E/ NEMA 5-15R	2	10	2CLA223800N1302	Upon request
N2135 PL - Euro-American unearthed socket outlet, Rated voltage: 125/250 V AC, Rated current: 15/16A. 2P (non-earthed)/NEMA 1-15R	1	20	2CLA213500N1302	
N2237 PL - British standard socket outlet, Rated current: 13A, 2P+E	2	10	2CLA223700N1802	



2CLA218500
N1302



2CLA228500
N1302

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
USB Chargers				
N2185 PL - USB charger 750mA, 1-gang	1	1	2CLA218500N1302	Upon request
N2185.2 PL - USB charger 2.000mA, 1-gang	1	1	2CLA218520N1302	
N2285 PL - USB charger 1.500mA, 2-gang	2	1	2CLA228500N1302	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Blank Plates				
IIM1BLNK PL - Blank Plate	1	20/400	1SYK100001A1141	121

IVIE complete range

IVIE mechanisms - Silver



1SYK100001A1142



2CLA226030N1302



2CLA226030N1302



2CLA226080N1302



2CLA226090N1302

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Dimmer & Fan Regulators				
IIM2FR05 PL - Step fan regulator 5 step	2	5/100	1SYK100001A1142	1,317
IIM1FR04 PL - Step fan regulator 4 step	1	10/200	1SYK100001A1143	1,165
IIM1D400 PL - Dimmer 400 Watt	1	10/200	1SYK100001A1145	1,489
N2260.2 PL - Universal rotatory/push dimmer • Rated voltage: 230 V AC • Max. power: Incandescent: 500 W • Halogen lamp with electronic transformer: 500 VA • Halogen lamp with ferromagnetic transformer: 400 VA.	2	1	2CLA226020N1302	Upon request
N2260.3 PL - LED rotatory/push dimmer 230 V AC • Rated voltage: 230 V AC, Nominal power: 250 W/VA • Power (min./max load): LEDi: 2/100 W/VA (max. 10 lamps) • Dimmable energy saving lamps: 2/100 W/VA (max. 10 lamps) • LV LEDi with transformer (only type L or LC): 4/100 W/VA (max. 10 lamps) • Incandescent lamps: 10/250 W/VA • Halogen lamps: 10/250 W/VA • LV halogen with transformer (only type L or LC): 10/250 W/VA (max. 10 lamps) • 2 wire connection • Optional: auxiliary on/off with 2-way switch N2X02	2	1	2CLA226030N1302	
N2260.8 PL - LED rotatory/push dimmer 127 V AC • Rated voltage: 127 V AC, Frequency: 50/60 Hz (Nominal power: 140 W/VA) • Power (min./max load): LEDi: 2/55 W/VA (max. 10 lamps) • Dimmable energy saving lamps: 2/55 W/VA (max. 10 lamps) • LV LEDi with transformer (only type L or LC): 4/55 W/VA (max. 10 lamps) • Incandescent lamps: 10/140 W/VA • Halogen lamps: 10/140 W/VA • LV halogen with transformer (only type L or LC): 10/140 W/VA (max. 10 lamps)	2	1	2CLA226080N1302	
N2260.9 PL - 1-10V rotary dimmer • Rated voltage: 127 - 230 V AC/50 - 60 Hz • Max. power: 230 Vac: 700 VA • 127 Vac: 350 VA • Max. 6 ballasts per device	2	1	2CLA226090N1302	



1SYK100001A1147



1SYK100001A1149



1SYK100001A1157

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Data & Voice				
IIM1RJ11 PL - RJ11 Tel. jack 2 pin	1	20/400	1SYK100001A1147	305
IIM1RJ45 PL - RJ45 Jack cat 6	1	20/400	1SYK100001A1148	995

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
TV Socket				
IIM1TVSK PL - TV co-axial socket	1	20/400	1SYK100001A1149	362

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Shaver Socket				
IIM2SVSK PL - Shaver Socket	2	5/100	1SYK100001A1157	1,800



2CLA218040N1302

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
DND & MMR				
IIM1DNDS PL - DND and MMR set internal & external	2+3	5/100	1SYK100001A1155	2,162
N2244.5 PL - DND and MUR 2-gang interlocked switch	1	1	2CLA224450N1302	Upon request
N2180.4 PL - LED DND signaling light	2	1	2CLA218040N1302	
N2180.4 BL - LED MUR signaling light	1	1	2CLA218050N1102	

IVIE complete range

IVIE mechanisms - Silver



2CLA221410N1302



1SYK100001A1159



2CLA215520
N1302



2CLA215530
N1302



2CLA215540
N1302



2CLA215550
N1302



2CLA215560
N1302



2CLA215580
N1302



2CLA211900
N1302



2CLA221900
N1302

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Key Card Switches				
N2214.1 PL - Card switch 1-gang, 1-way, DP	2	1	2CLA221410N1302	Upon request

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Down Lighter				
IIM3DOWN PL - Down lighter	2	5/100	1SYK100001A1159	1,132

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Audio & Video Connector				
N2155.2 PL - 2x RCA connection unit	1	1	2CLA215520N1302	Upon request
N2155.3 PL - 3x RCA connection unit	1	1	2CLA215530N1302	
N2155.4 PL - Mini-Jack connection unit	1	1	2CLA215540N1302	
N2155.5 PL - VGA connection unit	1	1	2CLA215550N1302	
N2155.6 PL - HDMI connection unit	1	1	2CLA215560N1302	
N2155.7 PL - HDMI female-female connection unit	1	1	2CLA215570N1302	
N2155.8 PL - USB connection unit	1	1	2CLA215580N1302	
N2155.9 PL - USB female-female connection unit	1	1	2CLA215590N1302	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Motion Sensor				
N2241 PL - 110° motion sensor Max. power: Incandescent: 1.800W @230V AC/1.000W @127V AC • Halogen with electronic o ferromagnetic transformer: 750VA @230V AC/400VA @127V AC - Fluorescent lamps or motors: 400VA @230V / 200VA @127Vac • For automatic switching of devices dependent on motion and brightness • With integrated selector switch for automatic ON-OFF in the front side, Switch-off delay: 10 sec to 10 min or short-time pulse 1 sec adjustable (from the front side) • Detection range: 5 m radius Adjustable light set point level for activation (from the front side) • Detection angle: 110° Mounting height: 1, 2 m Auxiliary control with N2X04.X push-buttons	2	1	2CLA224100N1302	Upon request


Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Buzzer & Door Bell				
IIM2BUZR PL - Buzzer	2	5/100	1SYK100001A1154	765
N2119 PL - Buzzer	1	1	2CLA211900N1302	Upon request
N2219 PL - Buzzer	2	1	2CLA221900N1302	
N2224 PL - Electronic door bell 230 V AC	2	1	2CLA222400N1302	

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Indicator				
IIM1INDI PL - Indicator	1	20/400	1SYK100001A1153	448

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Thermostat				
N2240.5 PL - Cover plate for digital thermostat	2	1	2CLA224050N1302	Upon request

IVIE complete range

IVIE mechanisms - Silver

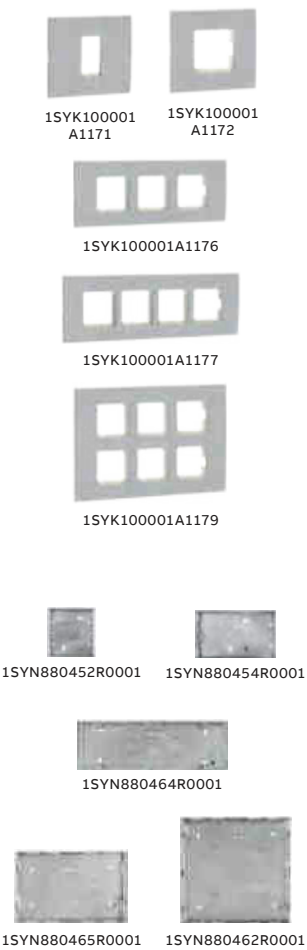


Plates				
Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Silver plate with frame				
IIP0133 PL - 1M plate	1	15/360	1SYK100001A1171	436
IIP0233 PL - 2M plate	2	15/360	1SYK100001A1172	452
IIPP343 PL - 3M plate power	3	10/240	1SYK100001A1173	515
IIP0343 PL - 3M plate	3	10/240	1SYK100001A1174	614
IIP0453 PL - 4M plate	4	10/190	1SYK100001A1175	772
IIP0683 PL - 6M plate	6	5/120	1SYK100001A1176	966
IIP0893 PL - 8M plate	8	5/120	1SYK100001A1177	1,118
IIP0855 PL - 8M plate square	8	5/95	1SYK100001A1178	1,213
IIP1286 PL - 12M plate	12	5/95	1SYK100001A1179	1,622
IIP1888 PL - 18M plate	18	5/40	1SYK100001A1180	2,284

Metal flush boxes				
Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Flush boxes				
Metal Box 1-2M - CMBZ3302	1/2	108	1SYN880452R0001	126
Metal Box 3M - CMBZ4303	3	82	1SYN880453R0001	137
Metal Box 4-5M - CMBZ5305	4	60	1SYN880454R0001	168
Metal Box 6M - CMBZ8306	6	40	1SYN880463R0001	284
Metal Box 8M - CMBZ9308	8	39	1SYN880464R0001	394
Metal Box 8MV - CMBZ5508V	8	26	1SYN880456R0001	368
Metal Box 12M - CMBZ8612	12	16	1SYN880465R0001	431



Euro White

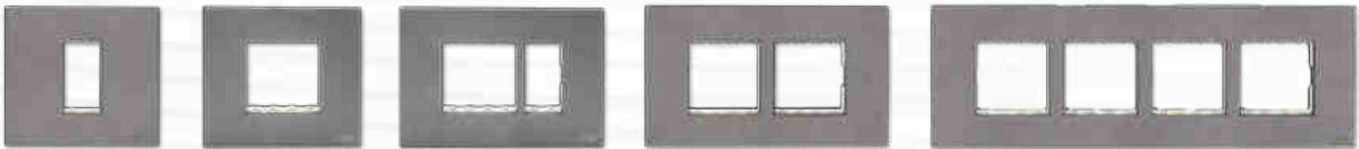

Anthracite Grey




Silver

ABB Tvisha

Wiring accessories

Switch on simplicity

ABB Tvisha is a range of wiring accessories with simple flat surface design that creates a trend on the wall with its elegant Euro white finish. The range covers a large variety of functionalities that caters to most of the applications beyond the normal switching functions like USB chargers, HDMI ports, communication sockets, foot lamps and dimmers. ABB Tvisha is ideal for residential and commercial requirements.

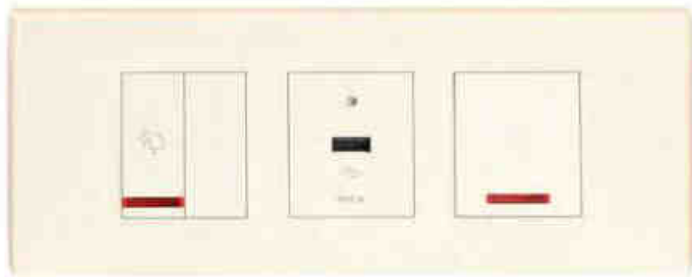

- Plastic parts which hold current carrying parts are made of PA6 20% glass filled rating upto 16A
- All switches are marked with IS 3854:1997
- Terminals are designed in such a way that wire is tightened without damage
- Bi-metal silver contact tips for less spark and longer life
- 6A & 6/16A marked with IS 1293, up to 16A
- Non-flammable thermoplastic resin parts and a very high insulating resistance after humidity test



1SYK100001A1501 1SYK100001A1504



1SYK100001A1505 1SYK100001A1509



1SYK100001A1508 1SYK100001A1512



1SYK100001A1527 1SYK100001A1523

Switches

Item description	Module size	Std pack	Ordering code	Unit M.R.P.(₹)
ITS10610 BL 6A 1 way switch	1 M	20	1SYK100001A1501	130
ITS1061L BL 6A 1 way switch with Ind.	1 M	20	1SYK100001A1502	195
ITS10620 BL 6A 2 way switch	1 M	20	1SYK100001A1503	175
ITS106B0 BL 6A Bell switch	1 M	20	1SYK100001A1504	190
ITS106BL BL 6A Bell switch with Ind.	1 M	20	1SYK100001A1505	265
ITS11610 BL 16A 1 way switch	1 M	20	1SYK100001A1506	205
ITS1161L BL 16A 1 way switch with Ind.	1 M	20	1SYK100001A1507	250
ITS1201L BL 20A DP Switch 1 way with Ind.	1 M	20	1SYK100001A1508	565
ITS206BL BL 6A Bell Mega switch with Ind.	2 M	10	1SYK100001A1509	340
ITS2062L BL 6A 2 way Mega switch with Ind.	2 M	10	1SYK100001A1510	395
ITS2162L BL 16A 2 way Mega switch with Ind.	2 M	10	1SYK100001A1511	415
ITS2321L BL 32A 1 Way DP Mega switch with Ind.	2 M	10	1SYK100001A1512	590

Sockets

Item description	Module size	Std pack	Ordering code	Unit M.R.P.(₹)
ITK20306 BL 6A 3Pin Socket	2 M	10	1SYK100001A1527	190
ITK20616 BL 6/16A Socket	2 M	10	1SYK100001A1523	335

Price list

Switches, sockets, plates and accessories



Support accessories

Item description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
ITM1BLNK BL Blank plate	1 M	20	1SYK100001A1541	45
ITM2FR05 BL Fan regulator 5 step	2 M	5	1SYK100001A1542	745
ITM1FR04 BL Fan regulator 4 step	1 M	10	1SYK100001A1543	550
ITM1RJ11 BL RJ 11TEL 2 Pin	1 M	20	1SYK100001A1544	175
ITM1RJ45 BL RJ 45 Jack CAT 6	1 M	20	1SYK100001A1545	655
ITM1TVSK BL TV socket	1 M	20	1SYK100001A1546	180
ITM1FLEX BL Flex outlet	1 M	20	1SYK100001A1547	160
ITM2LDL BL LED foot lamp	1 M	10	1SYK100001A1550	570
ITM1INDI BL Indicator	2 M	5	1SYK100001A1551	310
ITM1USBC BL USB Charger 1A	1 M	5	1SYK100001A1552	1,185
ITM2USBC BL USB charger 2A	2 M	10	1SYK100001A1553	2,265
ITM1HDMI BL HDMI Port 2.0	1 M	20	1SYK100001A1554	1,635
ITM1D400 BL Dimmer 400W	1 M	20	1SYK100001A1548	825
ITM2D1000 BL Dimmer 1000W	1 M	20	1SYK100001A1549	1,045
ITM2MS20 BL Single Phase Starter 20A	2 M	5	1SYK100001A1555	1,145
ITM2MS25 BL Single Phase Starter 25A	2 M	5	1SYK100001A1556	1,245



Plates

Item description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
ITP0133 BL 1 M Plate	1 M	15	1SYK100001A1571	120
ITP0233 BL 2 M Plate	2 M	15	1SYK100001A1572	120
ITPP343 BL 3 M Plate power	3 M	10	1SYK100001A1573	155
ITP0453 BL 4 M Plate	4 M	10	1SYK100001A1574	170
ITP0683 BL 6 M Plate	6 M	5	1SYK100001A1575	300
ITP0893 BL 8 M Plate	8 M	5	1SYK100001A1576	315
ITP0855 BL 8 M Plate square	8 M	5	1SYK100001A1577	445
ITP1286 BL 12 M Plate	12 M	5	1SYK100001A1578	520
ITP1696 BL 16M Plate	16 M	5	1SYK100001A1579	605
ITP1888 BL 18M Plate	18 M	5	1SYK100001A1580	675



Metal flush boxes

Type reference and description	Number of modules	Std pack	Ordering code	Unit M.R.P.(₹)
Flush boxes				
Metal Box 1-2M - CMBZ3302	1/2	108	15YN880452R0001	126
Metal Box 3M - CMBZ4303	3	82	15YN880453R0001	137
Metal Box 4-5M - CMBZ5305	4	60	15YN880454R0001	168
Metal Box 6M - CMBZ8306	6	40	15YN880463R0001	284
Metal Box 8M - CMBZ9308	8	39	15YN880464R0001	394
Metal Box 8MV - CMBZ5508V	8	26	15YN880456R0001	368
Metal Box 12M - CMBZ8612	12	16	15YN880465R0001	431
Metal Box 16M - CMBZ9616	12	15	15YN880466R0001	567
Metal Box 18M - CMBZ8824	18	10	15YN880462R0001	683

ABB Tvisha (White)

Wiring accessories



Switches

Item description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
ITS10610 RW 6A 1 way switch	1 M	20	1SYK100001A1801	Upon request
ITS1061L RW 6A 1 way switch with Ind.	1 M	20	1SYK100001A1802	
ITS10620 RW 6A 2 way switch	1 M	20	1SYK100001A1803	
ITS106B0 RW 6A Bell Switch	1 M	20	1SYK100001A1804	
ITS106BL RW 6A Bell Switch with Ind.	1 M	20	1SYK100001A1805	
ITS11610 RW 16A 1 way switch	1 M	20	1SYK100001A1806	
ITS1161L RW 16A 1 way switch with Ind.	1 M	20	1SYK100001A1807	
ITS1201L RW 20A DP Switch 1 way with Ind.	1 M	20	1SYK100001A1808	
ITS206BL RW 6A Bell Mega Switch with Ind.	2 M	10	1SYK100001A1809	
ITS2062L RW 6A 2 way Mega Switch with Ind	2 M	10	1SYK100001A1810	
ITS2162L RW 16A 2 way Mega Switch with Ind	2 M	10	1SYK100001A1811	
ITS2321L RW 32A 1 Way DP Mega Switch with Ind.	2 M	10	1SYK100001A1812	



Sockets

Item description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
ITK20006 RW 6A 3 Pin Socket	2 M	10	1SYK100001A1827	Upon request
ITK20616 RW 6/16A Socket	2 M	10	1SYK100001A1823	



Support accessories

Item description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
ITM1BLNK RW Blank Plate	1 M	20	1SYK100001A1841	Upon request
ITM2FR05 RW Fan Regulator 5 Step	2 M	5	1SYK100001A1842	
ITM1FR04 RW Fan Regulator 4 Step	1 M	10	1SYK100001A1843	
ITM1RJ11 RW RJ 11TEL 2 Pin	1 M	20	1SYK100001A1844	
ITM1RJ45 RW RJ 45 Jack CAT 6	1 M	20	1SYK100001A1845	
ITM1TVSK RW TV Socket	1 M	20	1SYK100001A1846	
ITM1FLEX RW Flex outlet	1 M	20	1SYK100001A1847	
ITM1D400 RW Dimmer 400W	1 M	10	1SYK100001A1848	
ITM2D1000 RW Dimmer 1000W	2 M	5	1SYK100001A1849	
ITM2LDL RW LED Foot Lamp	1 M	5	1SYK100001A1850	
ITM1INDI RW Indicator	2 M	10	1SYK100001A1851	
ITM1USBC RW USB Charger 1A	1 M	20	1SYK100001A1852	
ITM2USBC RW USB Charger 2A	1 M	20	1SYK100001A1853	
ITM1HDMI RW HDMI Port 2.0	1 M	20	1SYK100001A1854	
ITM2MS20 RW Motor Starter 20A	2 M	5	1SYK100001A1855	
ITM2MS25 RW Motor Starter 25A	2 M	5	1SYK100001A1856	

ABB Tvisha (White)

Wiring accessories




Plates


Item description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
ITP0133 RW 1 M Plate	1 M	15	1SYK100001A1871	
ITP0233 RW 2 M Plate	2 M	15	1SYK100001A1872	
ITPP343 RW 3 M Plate Power	3 M	10	1SYK100001A1873	
ITP0453 RW 4 M Plate	4 M	10	1SYK100001A1874	
ITP0683 RW 6 M Plate	6 M	5	1SYK100001A1875	Upon request
ITP0893 RW 8 M Plate	8 M	5	1SYK100001A1876	
ITP0855 RW 8 M Plate Square	8 M	5	1SYK100001A1877	
ITP1286 RW 12 M Plate	12 M	5	1SYK100001A1878	
ITP1696 RW 16M Plate	16 M	5	1SYK100001A1879	
ITP1888 RW 18M Plate	18 M	5	1SYK100001A1880	

ABB Tvisha

Anti-bacterial range

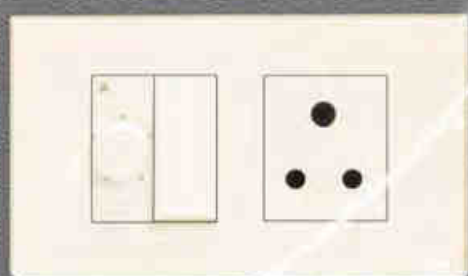

Switches with
double shrouds



Socket with
separate shutter



Frame with
partition



Knobs with
360° rotation



*Ordering codes and prices on request

Classic ideas never go out of style

Snieo combines modern design with high-performance materials such as premium thermoplastic resin. Our switches are made of fire retardant substances with superior electrical properties. Chamfered edges prevent dust accumulation and well crafted sockets provide an enduring grip for a variety of plugs.



Switch modules

Description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
6A 1 way switch - CPW10610	1	25	1SYN880676R0001 ■	140
6A 2 way switch - CPW10620	1	25	1SYN880677R0001 ■	185
6A Bell Push - CPW106B0	1	25	1SYN880676R0002 ■	195
6A 1 way switch LED - CPW1061L	1	25	1SYN880676R0003 ■	215
6A Bell Push LED - CPW106BL	1	25	1SYN880676R0004 ■	295
16A 1 way switch - CPW11610	1	25	1SYN880676R0005 ■	205
16A 2 way switch - CPW11620	1	25	1SYN880677R0002 ■	300
16A 1 way switch with LED - CPW1161L	1	25	1SYN880676R0006 ■	260
20A DP Switch 1 way with LED - CPW1201L	1	20	1SYN880670R0001 ■	365
6A 1 way Mega switch with LED - CPW2061L	2	10	1SYN880652R0001 ■	300
6A 2 way Mega switch with LED - CPW2062L	2	10	1SYN880652R0002 ■	370
6A Mega Bell Push with LED - CPW206BL	2	10	1SYN880652R0003 ■	325
16A 1 way Mega switch with LED - CPW2161L	2	10	1SYN880653R0001 ■	395
16A 2 way Mega switch with LED - CPW2162L	2	10	1SYN880653R0002 ■	425
32A 1 way DP Switch with LED - CPW2321DPL	2	10	1SYN880655R0001 ■	490

Socket modules

Description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
6A 3 Pin Socket - 2 Module - CPWS2063	2	20	1SYN880690R0002 ■	200
6/16A Socket - 2 Module - CPWS2166	2	10	1SYN880393R0001 ■	305
6/16A Socket - CPWS3166	3	5	1SYN880122R0001 ■	370

Support modules

Description	Module size	Std pack	Ordering code	Unit M.R.P. (₹)
Fan Regulator - 1 Module - CPW1SFR4	1	20	1SYN880373R0002	480
Fan Regulator - CPW2SFR5	2	10	1SYN880284R0003 ■	705
Dimmer 100W - 1 Module - CPW1D0400	1	20	1SYN880373R0011 ■	605
Dimmer 400W - CPW2D0400	2	10	1SYN880400R0001	905
Dimmer 1000W - CPW1D1000	2	20	1SYN880500R0001	1,050
Blank Plate - CPW1BLNK	1	80	1SYN880182R0001 ■	50
TV Socket - CPW1TVSK	1	20	1SYN880175R0001 ■	155
RJ 11TEL 2 Pin - CPW1RJ11	1	20	1SYN880192R0001 ■	140
RJ 45 Jack CAT 6 - CPW1RJ45	1	20	1SYN880201R0001 ■	695
Flex Outlet - CPW1FLEX	1	20	1SYN880165R0001	190
Foot Lamp Grid - CPW4FLGD	4	10	1SYN880671R0001	340
Buzzer - CPW2BZR	2	10	1SYN880490R0001	305
Indicator - CPW1IND	1	20	1SYN880412R0004	315

■ Stock items

Snieo

Wiring accessories

Hospitality products

Description	Ordering code	Unit M.R.P. (₹)
Mechanical Keytag fitted with Lumina Plate & 20A DP Switch (3M) - CPW320MKT	1SYN880669R0001	1,155
DND/MMR Set - External - CPWDNDSET	1SYN880412R0005	995
Switch Ste DND/MMR - Internal - CPW2SET	1SYN880414R0001	650
Room Occupied - Internal - CPW1OQP	1SYN880412R0003	445
USB Charger 1Module 1000mA - 1 CPW1USBC	1SYN880417R0001	1,840
Charger 2Module 2000mA - 2 CPW2USBC	1SYN880418R0001	3,365

Snieo mounting plates

Description	Metal box size	Std Pack	Ordering code	Unit M.R.P. (₹)
1 M Plate - SNWP3301	3"x3"	25	1SYN880421R0001 ■	105
2 M Plate - SNWP3302	3"x3"	25	1SYN880422R0001 ■	105
3 M Plate - SNWP4303	4"x3"	20	1SYN880423R0001 ■	135
3 M Power Plate - SNWP4303S	4"x3"	20	1SYN880424R0001 ■	135
4 M Plate - SNWP5304	5"x3"	15	1SYN880425R0001 ■	155
5 M Plate - SNWP5305	5"x3"	15	1SYN880426R0001 ■	185
6 M Plate - SNWP8306	8"x3"	10	1SYN880427R0001 ■	210
8 M Plate - SNWP8308	8"x3"	10	1SYN880428R0001 ■	315
8 M Plate Square - SNWP5508	5"x5"	6	1SYN880430R0001 ■	300
10 M Plate - SNWP9310	9"x3"	15	1SYN880429R0001 ■	320
12 M Plate - SNWP8612	8"x6"	6	1SYN880431R0001 ■	385
16 M Plate - SNWP8616	8"x6"	6	1SYN880432R0001 ■	490

Metal flush boxes

Description	Metal box size	Std Pack	Ordering code	Unit M.R.P. (₹)
Metal Box 1-2M - CMBZ3302	3"x3"	108	1SYN880452R0001 ■	126
Metal Box 3M - CMBZ4303	4"x3"	82	1SYN880453R0001 ■	137
Metal Box 4-5M - CMBZ5305	5"x3"	60	1SYN880454R0001 ■	168
Metal Box 6-8MH - CMBZ8308	8"x3"	40	1SYN880455R0001 ■	289
Metal Box 9-10M - CMBZ9310	9"x3"	39	1SYN880457R0001 ■	404
Metal Box 8MV - CMBZ5508V	5"x5"	26	1SYN880456R0001 ■	378
Metal Box 12-16M - CMBZ8616	8"x6"	16	1SYN880458R0001 ■	431

Surface boxes

Description	Length	Height	Depth	Std Pack	Ordering code	Unit M.R.P. (₹)
Surface box 1-2M- SNBW3302	86.7	86.7	49.3	60	1SYN880351R0001	Upon request
Surface box 3M- SNBW4303	115	87	50.8	45	1SYN880352R0001	
Surface box 4M- SNBW5305	146	85.3	50.6	30	1SYN880353R0001	
Surface box 6-8M- SNBW8308	220.3	85.9	50.5	20	1SYN880354R0001	

■ Stock items

Busch-Presence detectors

Energy saving the easy way

Presence detectors automatically detect the presence of someone inside the room. Their precision is far superior to that of conventional movement detectors. Not only lighting systems but heating systems and air-conditioning systems can be controlled intelligently and efficiently with presence detectors. Empty rooms in which the lights are on and the air-conditioning runs at full power are now history. There is one presence detector for each need.



Office single



Office open plan /
with or without windows



Gym
Sport facilities



Toilets



6818 U-500

Description	Type	Ordering code	L.P. (₹)
Busch-Watchdog Presence tech BasicLINE mini - 6 Metres For switching lighting systems that depend on brightness and movement. Ceiling installation using integrated spring bracket. Switch-off delay: approx. 1 sec - 15 min or short-time pulse adjustable.	6811 EB-500	2CKA006800A2517	4,776
Busch-Watchdog Presence tech BasicLINE - 8 Metres For switching lighting systems that depend on brightness and movement. For semiautomatic and fully automatic operation. Ceiling installation using integrated spring bracket. Switch-off delay: approx. 5 sec - 30 min or short-time pulse adjustable.	6814 U-500	2CKA006800A2518	4,141
Busch-Watchdog Presence tech BasicLINE Corridor - 24 Metres For switching lighting systems that depend on brightness and movement. Ceiling installation using included dust protection socket. Switch-off delay: approx. 10 sec - 30 min or short-time pulse adjustable. Remote control possible via IR service remote control 6843. Use outdoors possible due to combination with surfacemounted housing 6888.	6818 U-500	2CKA006800A2519	9,556
Surface-mounting box -6818U For Busch-Watchdog Presence tech BasicLINE Corridor 6818 U-500. For surface mounting and increase of the protection type. Protection class (Device): IP 54	6888	2CKA006899A2305	1,652

Busch-Presence detectors

Energy saving the easy way



6817/32-24-500

Description	Type	Ordering code	L.P. (₹)
Presence Comp. e-contact - 8 Metres Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. Detection range (for installation height of 3 m): circular: Seated persons: up to Ø 6,5 m, walking persons: up to Ø 8 m. Ceiling installation using integrated spring bracket. Switch-off delay: approx. 1 min - 30 min or short-time pulse adjustable. Remote control possible via IR service remote control 6843. Suitable for false ceilings with a board thickness from 9 to 25 mm.	6817/62-24-500	2CKA006800A2737	12,612
Presence Uni. e-contact - 12 Metres Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. Detection range (for installation height of 3 m): circular: Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m. Ceiling installation using integrated spring bracket. Switch-off delay: approx. 1 min - 30 min or short-time pulse adjustable. Remote control possible via IR service remote control 6843. Suitable for false ceilings with a board thickness from 9 to 25 mm.	6817/32-24-500	2CKA006800A2739	15,433
Presence Uni. Bluetooth e-contact - 12 Metres Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. Detection range (for installation height of 3 m): circular: Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m. Ceiling installation using integrated spring bracket. Switch-off delay: approx. 1 min - 30 min or short-time pulse adjustable. With selectable dynamic switch-off delay. Suitable for false ceilings with a board thickness from 9 to 25 mm.	6817/33-24-500	2CKA006800A2743	17,068



6819/51-24-500

Description	Type	Ordering code	L.P. (₹)
Presence Comp. rel - 8 Meters Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. With power relays for LED operation. Detection range (for installation height of 3 m): circular Seated persons: up to Ø 6.5 m, walking persons: up to Ø 8 m.	6819/60-24-500	2CKA006800A2733	12,054
Presence Uni. Rel - 12 Meters Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. With power relays for LED operation. Detection range (for installation height of 3 m): circular Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.	6819/30-24-500	2CKA006800A2735	14,699
Presence Uni. rel. Bluetooth - 12 Metres Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. With Bluetooth interface for parameterization and operation. Adjustment of all setting options via smartphone or tablet. Light control via smartphone or tablet app. With power relays for LED operation. Detection range (for installation height of 3 m): circular Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.	6819/31-24-500	2CKA006800A2741	16,277
Presence Corr. rel. Bluetooth - 20 Metres Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. With Bluetooth interface for parameterization and operation. Adjustment of all setting options via smartphone or tablet. Light control via smartphone or tablet app. With power relays for LED operation. Detection range (for installation height of 3 m): rectangular Walking persons: crosswise to the detector 30 m x 3 m, frontal 20 m x 3 m. Extension of the detection range by means of master/slave combination. Mounting height 27 mm.	6819/51-24-500	2CKA006800A2745	21,478
Presence Uni. DALI Bluetooth -12 Metres Master presence detector with mixed light measurement. For regulating and switching of DALI operating devices that depend on brightness and movement. Suitable for up to 45 DALI operating devices. Detection range (for installation height of 3 m): circular Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m.	6819/35-24-500	2CKA006800A2747	20,742

Busch-Presence detectors

Energy saving the easy way



6819/50-24-500



6819/39-24-500



2069/21



2069/11-84



Description	Type	Ordering code	L.P. (₹)
Presence Corr. DALI Bluetooth - 30 Metres Master presence detector with mixed light measurement. For regulating and switching of DALI operating devices that depend on brightness and movement. . Detection range (for installation height of 3 m): rectangular Walking persons: crosswise to the detector 30 m x 3 m, frontal 20 m x 3 m.	6819/55-24-500	2CKA006800A2749	28,004
Presence Comp. Slave - 8 Metres Slave presence detector for extension of the detection range of master presence detectors. Detection range (for installation height of 3 m): circular Seated persons: up to Ø 6.5 m, walking persons: up to Ø 8 m. Visible height 23 mm.	6819/68-24-500	2CKA006800A2751	9,641
Presence Uni. Slave - 8 Metres Slave presence detector for extension of the detection range of master presence detectors. Detection range (for installation height of 3 m): circular Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m. Visible height 23 mm.	6819/38-24-500	2CKA006800A2753	11,759
Presence Corr. Slave - 30 Metres Slave presence detector for extension of the detection range of master presence detectors. Detection range (for installation height of 3 m): rectangular Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m.	6819/58-24-500	2CKA006800A2755	15,876
Presence Uni. DALI Slave - 12 Metres DALI slave presence detector for extension of the detection range of DALI master presence detectors. For the supply of operating voltage via the DALI master. Power consumption on the DALI bus: max. 10 mA, corresponds to approx. 5 DALI operating devices. Detection range (for installation height of 3 m): circular Seated persons: up to Ø 10 m, walking persons: up to Ø 12 m. Visible height 23 mm.	6819/39-24-500	2CKA006800A2759	15,288
Presence Corr. DALI Slave - 30 Metres DALI slave presence detector for extension of the detection range of DALI master presence detectors. For the supply of operating voltage via the DALI master. Detection range (for installation height of 3 m): rectangular Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m. Mounting height 27 mm.	6819/59-24-500	2CKA006800A2761	15,876
Presence Corr. Rel - 30 Metres Master presence detector with mixed light measurement. For switching lighting systems that depend on brightness and movement. With power relays for LED operation. Detection range (for installation height of 3 m): rectangular Walking persons: crosswise to the detector 24 m x 3 m, frontal/lengthways to the detector 14 m x 3 m. Switch-off delay: approx. 1 min. - 30 min. or short-time pulse adjustable.	6819/50-24-500	2CKA006800A2797	19,845
IceLight set ceiling module, Busch-iceLight Consisting of LED/FM insert, power module (neutral white) 2067/12 U. Consisting of ceiling module, one light direction 2068/21. For ambient lightning. Light outlet downward. Not dimmable. Light intensity can be switched between 100% and 25% using front service switch. Colour temperature: 4,000 K (neutral white) System power consumption: 5 W Rated voltage: 230 V~, + 10% / - 10% Current consumption of LED: 350 mA (secondary) Secondary: SELV	2069/21	2CKA001510A0018	23,587
IceLight Night light set, studio white, Busch-iceLight Complete set consists flush-mounted LED insert Night light (cold white) 2067/14 U. Wall module with one lighting direction, design future® linear 2068/11-84. Cover frame design future® linear 1721-184K. With one lighting direction. Not dimmable. For low brightness (night light). Colour temperature 6,500 K (cold white) System power consumption: 0.15 W Rated voltage: 230 V~, + 10% / - 10% Current consumption of LED: 40 mA (secondary) Secondary: SELV	2069/11-84	2CKA001510A0015	11,227

Emergency lighting systems

Exit sign, light and battery system

The requirement for emergency lighting originates from the Fire Precautions Act, 1971 and was further enforced by the Fire Precautions (Workplace) Regulations, 1997 (Amended 1999).

The Emergi-Lite concept is clear and simple. Emergi-Lite offers you reliable total solutions for safe evacuation. The way in which we do this is what makes the difference. Emergi-Lite offers advantages to everybody involved in the construction process. That way, you know that Emergi-Lite is always the right choice, for both you and your customers.

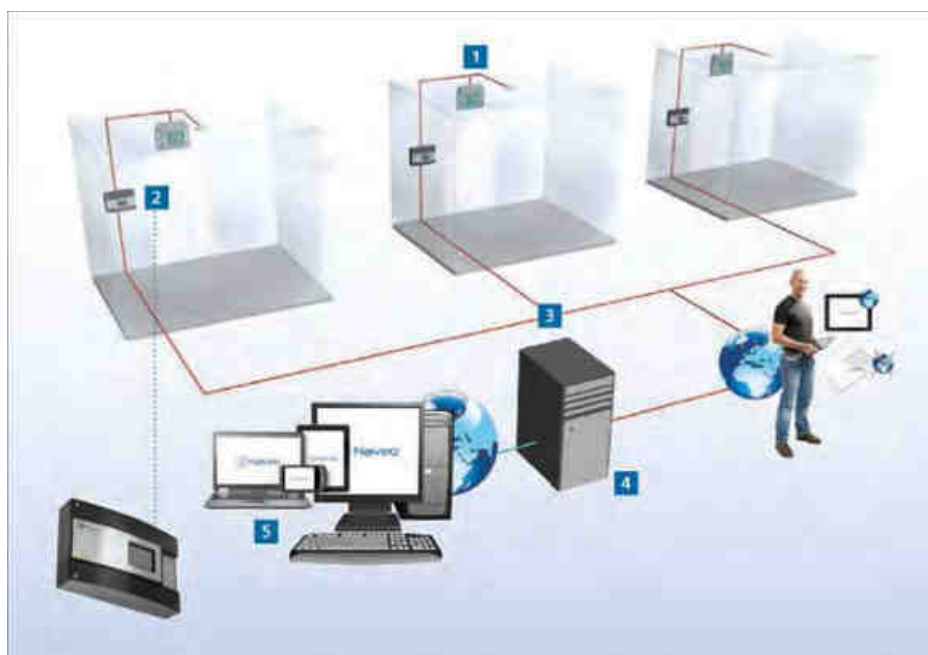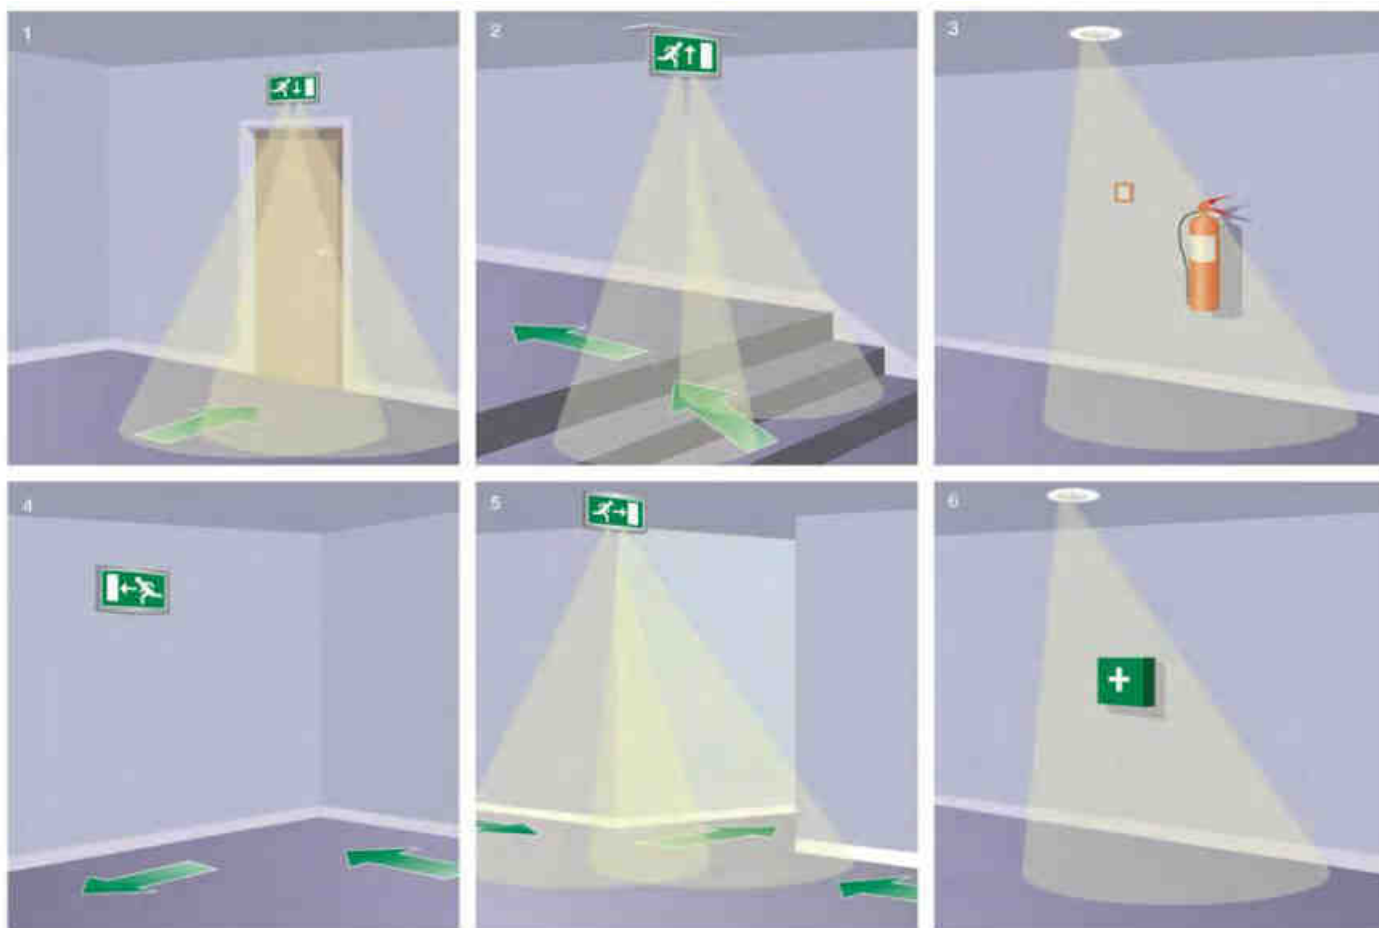

Industrial plugs and sockets

Wiring accessories



Reliable, durable and safe. Perfect for your application

These products are used for connection of equipment in all kind of applications where it needs to be possible to connect and disconnect. ABB industrial plugs and sockets are chosen when safety, reliability and durability are requested.

IEC 60309-2 "clock"

$I_e = 16 \text{ A}, 32 \text{ A}, 63 \text{ A}, 125 \text{ A}$

$U_e = 50 \dots 1000 \text{ V}$

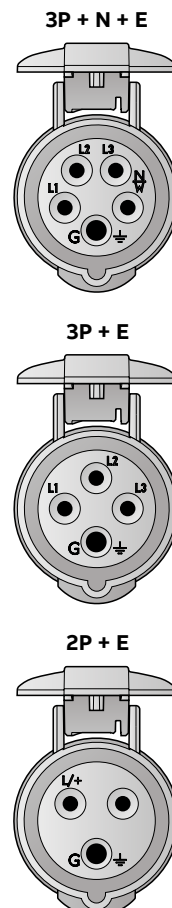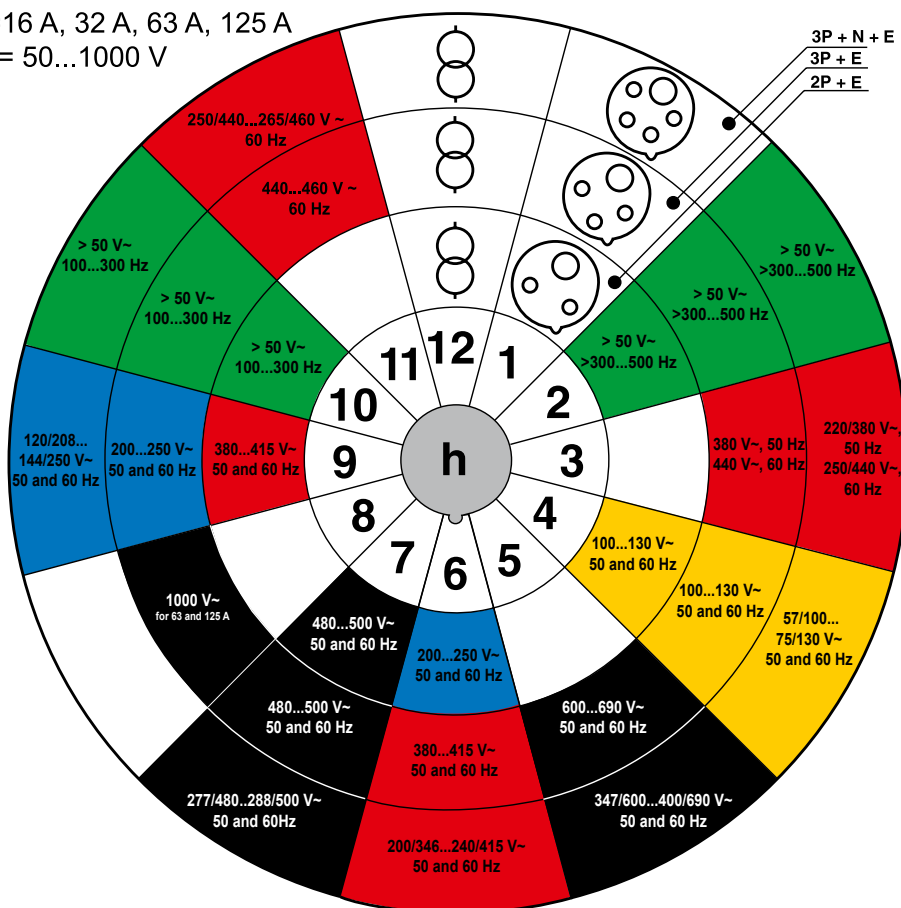

Standard voltages - Color codes according to IEC60309-1, -2

Position of earthing sleeve according to IEC 60309-2 (clock)	2P+E	3P+E	3P+N+E
1	<input type="checkbox"/> Optional voltage (not stated below)	<input type="checkbox"/> Optional voltage (not stated below)	<input type="checkbox"/> Optional voltage (not stated below)
2	■ >300...500 V~ >50 Hz	■ >300...500 V~ >50 Hz	■ >300...500 V~ >50 Hz
3	<input type="checkbox"/> Not used	■ 380 V~ 50 Hz, 440 V 60 Hz	■ 220/380 V~ 50 Hz, 250/440 V 60 Hz
4	■ 100...130 V~ 50 and 60 Hz	■ 100...130 V~ 50 and 60 Hz	■ 57/100...75/130 V~ 50 and 60 Hz
5	<input type="checkbox"/> Not used	■ 600...690 V~ 50 and 60 Hz	■ 347/600...400/690 V~ 50 and 60 Hz
6	■ 200...250 V~ 50 and 60 Hz	■ 380...415 V~ 50 and 60 Hz	■ 200/346...240/415 V~ 50 and 60 Hz
7	■ 480...500 V~ 50 and 60 Hz	■ 480...500 V~ 50 and 60 Hz	■ 277/480...288/500 V~ 50 and 60 Hz
8	<input type="checkbox"/> Not used	■ 1000 V~ (for 63 A and 125 A)	<input type="checkbox"/> Not used
9	■ 380...415 V~ 50 and 60 Hz	■ 200...250 V~ 50 and 60 Hz	■ 120/208...144/250 V~ 50 and 60 Hz
10	■ 100...300 V~ >50 Hz	■ 100...300 V~ >50 Hz	■ 100...300 V~ >50 Hz
11 Mainly for marine installations	<input type="checkbox"/> Not used	■ 440...460 V~ 60 Hz	■ 250/440...265/460 V~ 60 Hz
12 Supply from isolating transformer	<input type="checkbox"/> Supply from isolating transformer	<input type="checkbox"/> Supply from isolating transformer	<input type="checkbox"/> Supply from isolating transformer

Industrial plugs and sockets

Wiring accessories

Plugs



IP44 (2P+E)



IP44 (3P+E)



IP67 (3P+N+E)

Terminals / Pole	IP Protection	Color code	Voltage	Current rating (A)	Type	Ordering code	L.P. (₹)
3 (2P+E)	IP44	Blue	200...250	16	216-P6-I	2CMA100202R1000	490
		Blue	200...250	32	232-P6-I	2CMA100204R1000	705
		Blue	200...250	63	263P6	2CMA166742R1000	2,915
	IP67	Blue	200...250	16	216P6W	2CMA166460R1000	1,545
		Blue	200...250	32	232P6W	2CMA166722R1000	1,910
		Blue	200...250	63	263P6W	2CMA166776R1000	4,415
		Blue	200...250	125	2125P6W	2CMA166810R1000	12,025
		Blue	200...250	125	2125P6W	2CMA166810R1000	12,025
4 (3P+E)	IP44	Red	380...415	16	316-P6	2CMA193506R1000	670
		Red	380...415	32	332-P6	2CMA193515R1000	820
		Red	380...415	63	363P6	2CMA166752R1000	3,260
	IP67	Red	380...415	16	316P6W	2CMA166476R1000	1,670
		Red	380...415	32	332P6W	2CMA166738R1000	2,175
		Red	380...415	63	363P6W	2CMA166786R1000	4,670
		Red	380...415	125	3125P6W	2CMA166816R1000	12,460
		Red	380...415	125	3125P6W	2CMA166816R1000	12,460
5 (3P+N+E)	IP44	Red	346...415	16	416-P6-I	2CMA100203R1000	770
		Red	346...415	32	432-P6-I	2CMA100205R1000	610
		Red	346...415	63	463P6	2CMA166764R1000	3,505
	IP67	Red	346...415	16	416P6W	2CMA166494R1000	1,620
		Red	346...415	32	432P6W	2CMA166524R1000	2,410
		Red	346...415	63	463P6W	2CMA166798R1000	4,730
		Red	346...415	125	4125P6W	2CMA166828R1000	12,515
		Red	346...415	125	4125P6W	2CMA166828R1000	12,515

Connectors



IP44 (2P+E)



IP67 (3P+E)
























IP67 (3P+N+E)

Terminals / Pole	IP Protection	Color code	Voltage	Current rating (A)	Type	Ordering code	L.P. (₹)
3 (2P+E)	IP44	Blue	200...250	16	216-C6-I	2CMA100206R1000	820
		Blue	200...250	32	232-C6-I	2CMA100208R1000	1,000
		Blue	200...250	63	263C6	2CMA166840R1000	3,765
	IP67	Blue	200...250	16	216C6W	2CMA166538R1000	1,815
		Blue	200...250	32	232C6W	2CMA166584R1000	2,310
		Blue	200...250	63	263C6W	2CMA166874R1000	5,065
		Blue	200...250	125	2125C6W	2CMA166918R1000	12,980
		Blue	200...250	125	2125C6W	2CMA166918R1000	12,980
4 (3P+E)	IP44	Red	380...415	16	316-C6	2CMA193523R1000	850
		Red	380...415	32	332-C6	2CMA193529R1000	1,185
		Red	380...415	63	363C6	2CMA166850R1000	3,895
	IP67	Red	380...415	16	316C6W	2CMA166554R1000	2,160
		Red	380...415	32	332C6W	2CMA166604R1000	2,490
		Red	380...415	63	363C6W	2CMA166894R1000	5,785
		Red	380...415	125	3125C6W	2CMA166924R1000	15,015
		Red	380...415	125	3125C6W	2CMA166924R1000	15,015
5 (3P+N+E)	IP44	Red	346...415	16	416-C6-I	2CMA100207R1000	965
		Red	346...415	32	432-C6-I	2CMA100209R1000	1,350
		Red	346...415	63	463C6	2CMA166862R1000	4,095
	IP67	Red	346...415	16	416C6W	2CMA166572R1000	2,225
		Red	346...415	32	432C6W	2CMA166618R1000	2,860
		Red	346...415	63	463C6W	2CMA166906R1000	5,960
		Red	346...415	125	4125C6W	2CMA166936R1000	16,230
		Red	346...415	125	4125C6W	2CMA166936R1000	16,230



















Industrial plugs and sockets

Wiring accessories

Panel mounted socket - Unified angled flange

Terminals / Pole	IP Protection	Color code	Voltage	Current rating (A)	Type	Ordering code	L.P. (₹)
 IP44 (2P+E)	IP44	 Blue	200...250	16	216RAU6-I	2CMA100218R1000	770
		 Blue	200...250	32	232RAU6-I	2CMA100220R1000	870
		 Blue	200...250	63	263RAU6	2CMA167408R1000	3,125
	IP67	 Blue	200...250	16	216RAU6W	2CMA166996R1000	1,470
		 Blue	200...250	32	232RAU6W	2CMA166948R1000	1,785
		 Blue	200...250	63	263RAU6W	2CMA167442R1000	3,285
 IP44 (3P+E)	IP44	 Red	380...415	16	316RAU6	2CMA193226R1000	790
		 Red	380...415	32	332RAU6	2CMA193274R1000	1,035
		 Red	380...415	63	363RAU6	2CMA167418R1000	3,435
	IP67	 Red	380...415	16	316RAU6W	2CMA167012R1000	1,580
		 Red	380...415	32	332RAU6W	2CMA166964R1000	2,055
		 Red	380...415	63	363RAU6W	2CMA167452R1000	3,540
 IP44 (3P+N+E)	IP44	 Red	346...415	16	416RAU6-I	2CMA100219R1000	935
		 Red	346...415	32	432RAU6-I	2CMA100221R1000	1,160
		 Red	346...415	63	463RAU6	2CMA167430R1000	3,480
	IP67	 Red	346...415	16	416RAU6W	2CMA167030R1000	1,840
		 Red	346...415	32	432RAU6W	2CMA166982R1000	2,180
		 Red	346...415	63	463RAU6W	2CMA167464R1000	3,805







Panel mounted sockets - Unified straight flange

Terminals / Pole	IP Protection	Color code	Voltage	Current rating (A)	Type	Ordering code	L.P. (₹)
 IP44 (2P+E)	IP44	 Blue	200...250	16	216RU6-I	2CMA100210R1000	735
		 Blue	200...250	32	232RU6-I	2CMA100212R1000	825
		 Blue	200...250	63	263RU6	2CMA167510R1000	3,125
	IP67	 Blue	200...250	63	263RU6W	2CMA167374R1000	4,100
		 Blue	200...250	125	2125RU6W	2CMA167133R1000	12,625
 IP44 (3P+E)	IP44	 Red	380...415	16	316RU6	2CMA193178R1000	730
		 Red	380...415	32	332RU6	2CMA193250R1000	870
		 Red	380...415	63	363RU6	2CMA167520R1000	3,230
	IP67	 Red	380...415	63	363RU6W	2CMA167384R1000	4,105
		 Red	380...415	125	3125RU6W	2CMA167136R1000	12,770
 IP44 (3P+N+E)	IP44	 Red	346...415	16	416RU6-I	2CMA100211R1000	820
		 Red	346...415	32	432RU6-I	2CMA100213R1000	995
		 Red	346...415	63	463RU6	2CMA167532R1000	3,480
	IP67	 Red	346...415	63	463RU6W	2CMA167396R1000	4,115
		 Red	346...415	125	4125RU6W	2CMA167142R1000	12,815

Industrial plugs and sockets







Wiring accessories

Surface Sockets Outlet

Terminals / Pole	IP Protection	Color code	Voltage	Current rating (A)	Type	Ordering code	L.P. (₹)
 IP44 (2P+E)  IP67 (2P+E)	IP44	Blue	200...250	16	216RS6	2CMA193098R1000	795
		Blue	200...250	32	232RS6	2CMA193122R1000	1,085
		Blue	200...250	63	263RS6	2CMA167476R1000	3,795
	IP67	Blue	200...250	16	216RS6W	2CMA167149R1000	1,745
		Blue	200...250	32	232RS6W	2CMA167172R1000	2,485
		Blue	200...250	63	263RS6W	2CMA167306R1000	5,220
		Blue	200...250	125	2125RS6W	2CMA167246R1000	14,020
 IP44 (3P+E)  IP67 (3P+E)	IP44	Red	380...415	16	316RS6	2CMA193106R1000	855
		Red	380...415	32	332RS6	2CMA193130R1000	1,190
		Red	380...415	63	363RS6	2CMA167498R1000	4,115
	IP67	Red	380...415	16	316RS6W	2CMA167157R1000	2,110
		Red	380...415	32	332RS6W	2CMA167180R1000	2,670
		Red	380...415	63	363RS6W	2CMA167316R1000	5,340
		Red	380...415	125	3125RS6W	2CMA167252R1000	14,795
 IP44 (3P+N+E)  IP67 (3P+N+E) 125	IP44	Red	346...415	16	416RS6	2CMA193115R1000	920
		Red	346...415	32	432RS6	2CMA193139R1000	1,225
		Red	346...415	63	463RS6	2CMA167484R1000	4,315
	IP67	Red	346...415	16	416RS6W	2CMA167166R1000	2,265
		Red	346...415	32	432RS6W	2CMA167189R1000	2,950
		Red	346...415	63	463RS6W	2CMA167328R1000	5,495
		Red	346...415	125	4125RS6W	2CMA167264R1000	15,015

Switched interlocked socket outlet - horizontal thermoplastic

Housing in plastic (PBT). Cable entry with knock-outs Ø 25 mm/M25. Cable area 1.5...4 mm²

Terminals / Pole	IP Protection	Color code	Voltage	Current rating (A)	Type	Ordering code	L.P. (₹)
 IP44 (2P+E)  IP67 (2P+E)	IP44	Blue	200...250	16	216MHS6	2CMA167623R1000	7,185
		Blue	200...250	32	232MHS6	2CMA167669R1000	8,765
		Blue	200...250	63	263MHS6	2CMA167715R1000	15,245
	IP67	Blue	200...250	16	216MHS6W	2CMA167801R1000	7,185
		Blue	200...250	32	232MHS6W	2CMA167848R1000	9,645
		Blue	200...250	63	263MHS6W	2CMA167894R1000	17,535
 IP44 (3P+E)  IP67 (3P+E)	IP44	Red	380...415	16	316MHS6	2CMA167631R1000	8,010
		Red	380...415	32	332MHS6	2CMA167677R1000	9,060
		Red	380...415	63	363MHS6	2CMA167721R1000	19,125
	IP67	Red	380...415	16	316MHS6W	2CMA167809R1000	8,665
		Red	380...415	32	332MHS6W	2CMA167856R1000	10,675
		Red	380...415	63	363MHS6W	2CMA167899R1000	20,705
 IP44 (3P+N+E)  IP67 (3P+N+E)	IP44	Red	346...415	16	416MHS6	2CMA167640R1000	8,475
		Red	346...415	32	432MHS6	2CMA167686R1000	9,740
		Red	346...415	63	463MHS6	2CMA167727R1000	19,360
	IP67	Red	346...415	16	416MHS6W	2CMA167818R1000	9,315
		Red	346...415	32	432MHS6W	2CMA167865R1000	10,720
		Red	346...415	63	463MHS6W	2CMA167905R1000	20,875

Installation products

Product brands overview

The acquisition of Thomas & Betts advances ABB's strategy of expanding its electrification products division into new geographies, sectors and products. The combination of Thomas & Betts' electrical components and ABB's low voltage protection, control and measurement products offer more of the components you need every day than any other single manufacturer in the world.

Our focus is on improving your business performance by providing practical, reliable electrical products and services that solve everyday problems in:

Wire & cable management -

cable ties, wiring ducts, accessories.

Connectivity & grounding -

connectors, terminals, earthing, lightning protection

Cable protection systems -

rigid and flexible conduit & fittings

Lighting & systems -

emergency lighting, lighting & battery systems

Explosion protection -

IECex, UL, CSA lighting, boxes and conduit systems

Cable accessories and apparatus -

MV and HV switches, cable accessories

Markets we protect & connect together.

1 Renewables

Wind, solar, water & bio

2 Utilities

Power generation, transmission & distribution, telecom & datacentre, water & waste

3 Extraction

Oil, gas, mining

4 Transportation & infrastructure

Rail, road, marine, aerospace, rail track, motorways, waterways

5 Commercial & institutional

Office & storage, retail & leisure, healthcare & education, Government

6 Residential

Residential towers & apartment blocks, housing development projects, HMOs & university accommodation

7 Industry processing chemicals, pharma, minerals, metals, materials, food & beverage, agriculture

8 Industry assembling & OEM

OEM equipment & devices, machinery, automation, robotics

Wire & cable management - Energy & data connection	Cable protection systems - Energy & data protection	Connectivity & grounding - Critical process protection	Lighting - Safety & explosion proof
 Ty-Rap® Premium cable ties	 Adaptaflex Flexible conduit systems for critical power & data protection	 furse Earthing & lightning protection	 EMERGI-LITE Emergency lighting systems
 Ty-Met™ Stainless steel cable ties	 KOPEX Flexible conduit systems for hazardous areas	 elastimold Underground cable protection accessories	 EMERGI-LITE Emergency safety systems
 T&B CableTray Cable tray, ladder, support systems & wire duct	 PMA Cable protection systems	 JOSLYN Overhead products for electrical power systems	 DTS Explosion-proof lighting & emergency lighting
 E-Klips® Electrical & mechanical steel spring fasteners	 Harnessflex Automotive wiring harness protection	 Spec-Kon® Solderless crimp connectors	 DTS Custom built control panels for hazardous areas

Flexible conduit system

Adaptaflex flexible conduit system

Adaptaflex is one of the market leading flexible conduit system brands that can be found all over the world. Combining innovative design with dedicated manufacture, it offers customers one of the world's broadest ranges of cable protection products and solutions. With a choice of over 6000 products, the range covers metallic and non-metallic flexible conduit systems for the protection of critical power and data cables.

The system solutions from Adaptaflex need to perform in a wide variety of environments from high temperature to freezing subzero conditions. The products are designed and tested to withstand constant vibrations, water ingress, offer corrosion resistance and are available in halogen free, low smoke and low toxicity materials. An extensive range of engineered solutions are designed to withstand the rigours of some of the most technically demanding markets. So whatever your project involves, our experience will provide the answer, helping you to specify the correct flexible conduit system.

Markets and industries

Adaptaflex flexible conduit systems used to protect critical power and data cabling are available throughout a wide range of markets including:

- Commercial contracting
- Machinery
- Rail / Infrastructure
- Marine
- Mechanical
- Security / CCTV
- Data cabling
- Critical power

Many components are designed specifically for a market solution. These products uniquely meet an industry's needs - solving a specific application requirement, providing product innovation, saving installation and component costs, improving the quality and the integrity of the end product. Wherever you need mechanical and electrical protection for your cables you can be confident in specifying Adaptaflex products.

Type PA - Polyamide (Nylon) 6 conduit

Type Code	Description	UOM	MOQ	SPQ	M.R.P.*
PAFL13/BL	13mm nominal dia Nylon conduit, black	mtr	50	50	Upon request
PAFL16/BL	16mm nominal dia Nylon conduit, black	mtr	50	50	
PAFL21/BL	21mm nominal dia Nylon conduit, black	mtr	50	50	
PACL28/BL	28mm nominal dia Nylon conduit, black	mtr	50	50	
PACL34/BL	34mm nominal dia Nylon conduit, black	mtr	50	50	
PACL42/BL	42mm nominal dia Nylon conduit, black	mtr	25	25	
PACL54/BL	54mm nominal dia Nylon conduit, black	mtr	25	25	
PACS80/BL	80mm nominal dia Nylon conduit, black	mtr	10	10	
PACS106/BL	106mm nominal dia Nylon conduit, black	mtr	10	10	

* Price per meter



Approvals



Temperature Range

Static applications: -40°C to +120°C

Moving applications: -5°C to +120°C

Flexibility & fatigue life

High flexibility - high fatigue life

Fire performance & EMI screen

Self extinguishing Halogen-free

UV resistance

Very high

Type S - Galvanised steel general purpose conduit

Type Code	Description	UOM	MOQ	SPQ	M.R.P.*
S16	16mm nominal dia steel conduit	mtr	10	10	Upon request
S20	20mm nominal dia steel conduit	mtr	10	10	
S25	25mm nominal dia steel conduit	mtr	10	10	
S32	32mm nominal dia steel conduit	mtr	10	10	
S40	40mm nominal dia steel conduit	mtr	10	10	
S50	50mm nominal dia steel conduit	mtr	10	10	
S63	63mm nominal dia steel conduit	mtr	10	10	
S75	75mm nominal dia steel conduit	mtr	10	10	

* Price per meter



Approvals



Temperature range

Static applications: -50°C to +300°C

Moving applications: -45°C to +250°C

Flexibility & fatigue life

High flexibility - High fatigue life

Fire performance & EMI screen

Self extinguishing Halogen-free

UV resistance

Very high



Type SP - Covered steel general purpose conduit

Type Code	Description	UOM	MOQ	SPQ	M.R.P.*
SP16/BL	BL 16mm nom. dia covered steel conduit, black	mtr	10	10	Upon request
SP20/BL	20mm nom. dia covered steel conduit, black	mtr	10	10	
SP25/BL	25mm nom. dia covered steel conduit, black	mtr	10	10	
SP32/BL	32mm nom. dia covered steel conduit, black	mtr	10	10	
SP40/BL	40mm nom. dia covered steel conduit, black	mtr	10	10	
SP50/BL	50mm nom. dia covered steel conduit, black	mtr	10	10	
SP63/BL	63mm nom. dia covered steel conduit, black	mtr	10	10	
SP75/BL	75mm nom. dia covered steel conduit, black	mtr	10	10	

* Price per meter



Approvals



Temperature range

Static applications: -25°C to +70°C

Moving applications: -5°C to +90°C

Flexibility & fatigue life

High flexibility - Medium fatigue life

Fire performance & EMI screen

Self extinguishing

UV resistance

Very high


For any other specification/requirement of conduits and accessories kindly contact local ABB sales office

External lightning protection

OPR - Optimized Pulse Rod


The OPR efficiency (ΔT)

Lightning is one of the most spectacular meteorological phenomena. Generated by the interaction of clouds elements (water and ice), it can kill, injure and damage. The unique efficiency of the OPR Early streamer emission is based on the difference (ΔT), measured in a laboratory, in between the emission time of the OPR and the one from a simple rod. The OPR ESE air terminal is composed of a striking point connected to a down conductor to conduct the lightning to the ground.

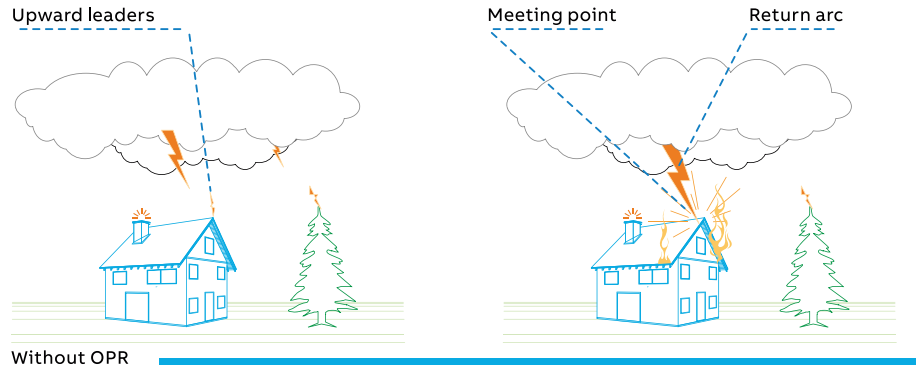

Complete autonomy

During a storm the ambient electric field may rise from 600 V to 10-20 kV/m. When the electric field reach this level representing a minimum risk for a lightning, the OPR begins to get activated and generates high voltage pulses, helping to create and propagating an upward leader. After a strike on the OPR, the lightning current is driven to ground by the down conductor to the earth termination system.

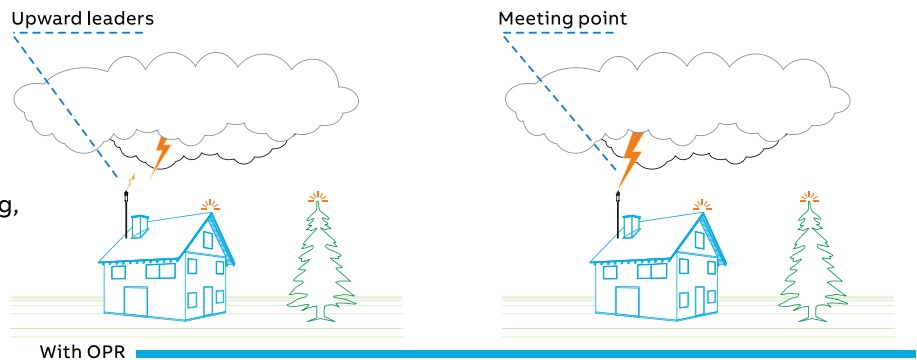

Radius of protection

The radius of protection (R_p) of the OPR is calculated according to the NF C 17-102 (edition 2011). It depends on the OPR efficiency (ΔT) expressed in micro-seconds. The maximum value for ΔT is 60 μs .


The risk assessment shall be calculated according to the NF C 17-102 Annex A / IEC 62305-2 and will define the protection level (LPL I, II, III or IV) which will be used in the determination of the OPR radius of protection.

Installing/testing

The installation and verification of lightning protection systems using one or more OPR units must be performed in accordance with the manufacturer's recommendations and to the NF C 17-102 standard.

OPR radius of protection

Protection level	I (r = 20 m)			II (r = 30 m)			III (r = 45 m)			IV (r = 60 m)		
OPR	OPR 30	OPR 45	OPR 60	OPR 30	OPR 45	OPR 60	OPR 30	OPR 45	OPR 60	OPR 30	OPR 45	OPR 60
h (m)	Radius of protection R_p (m)											
2	19	25	31	22	28	35	25	32	39	28	36	43
3	29	38	47	33	42	52	38	48	58	43	57	64
4	38	51	63	44	57	69	51	65	78	57	72	85
5	48	63	79	55	71	86	63	81	97	71	89	107
6	48	63	79	55	71	87	64	81	97	72	90	107
8	49	64	79	56	72	87	65	82	98	73	91	108
10	49	64	79	57	72	88	66	83	99	75	92	109
15	50	65	80	58	73	89	69	85	101	78	95	111
20	50	65	80	59	74	89	71	86	102	81	97	113
45	43	65	76	58	75	89	75	90	105	89	104	119
50	40	65	74	57	75	88	75	90	105	89	104	120
55	36	65	72	55	75	86	74	90	105	90	105	120
60	30	65	69	52	75	85	73	90	104	90	105	120

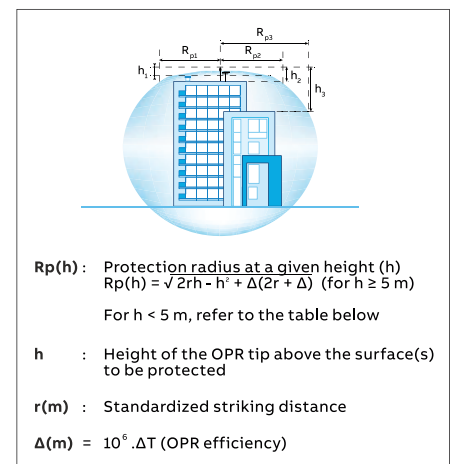

External lightning protection

OPR - Optimized Pulse Rod


OPR Range

Type Code	Description	Length (m)	Weight (kg)	Time gain (μs)	Ordering code	M.R.P. (₹)
OPR 30	ESE Air terminal without mast	0.215	2.4	30	2CTB899800R7000	1,33,450
OPR 45	ESE Air terminal without mast	0.215	2.4	45	2CTB899800R7500	1,59,575
OPR 60	ESE Air terminal without mast	0.215	2.4	60	2CTB899800R7100	1,75,720

Accessories

Type Code	Description	Length (m)	Weight (kg)	Ordering code	M.R.P. (₹)
LS COUNTER	Lightning stroke counter	-	0.56	2CTH0CCF2004	46,850
MAST 2M30	Mounting Mast, 2m, 30mm dia	2	4.4	H00003002L	8,650
MAST 3M	Mounting Mast, 3m with guywire and base plate	3	6.5	H00003003LGB	17,125
CM015	25kg sack of bentonite moisture	-	25	7TCA083870R0030	
CM035	25kg sack of furse conductive	-	25	7TCA083870R1818	
RB335	3/4 (NOM)x3000mm extensible cu-bond	3	-	7TCA083120R0069	
CR315	1in (25mm) type e connector	-	-	7TCA083210R0014	
PT205	Lockable high performance poly	-	-	7TCA083320R0011	
TC030/50-IN	25x3mm cu-tape 50m furse coils	50	-	7TCA083010R0629	

Upon request

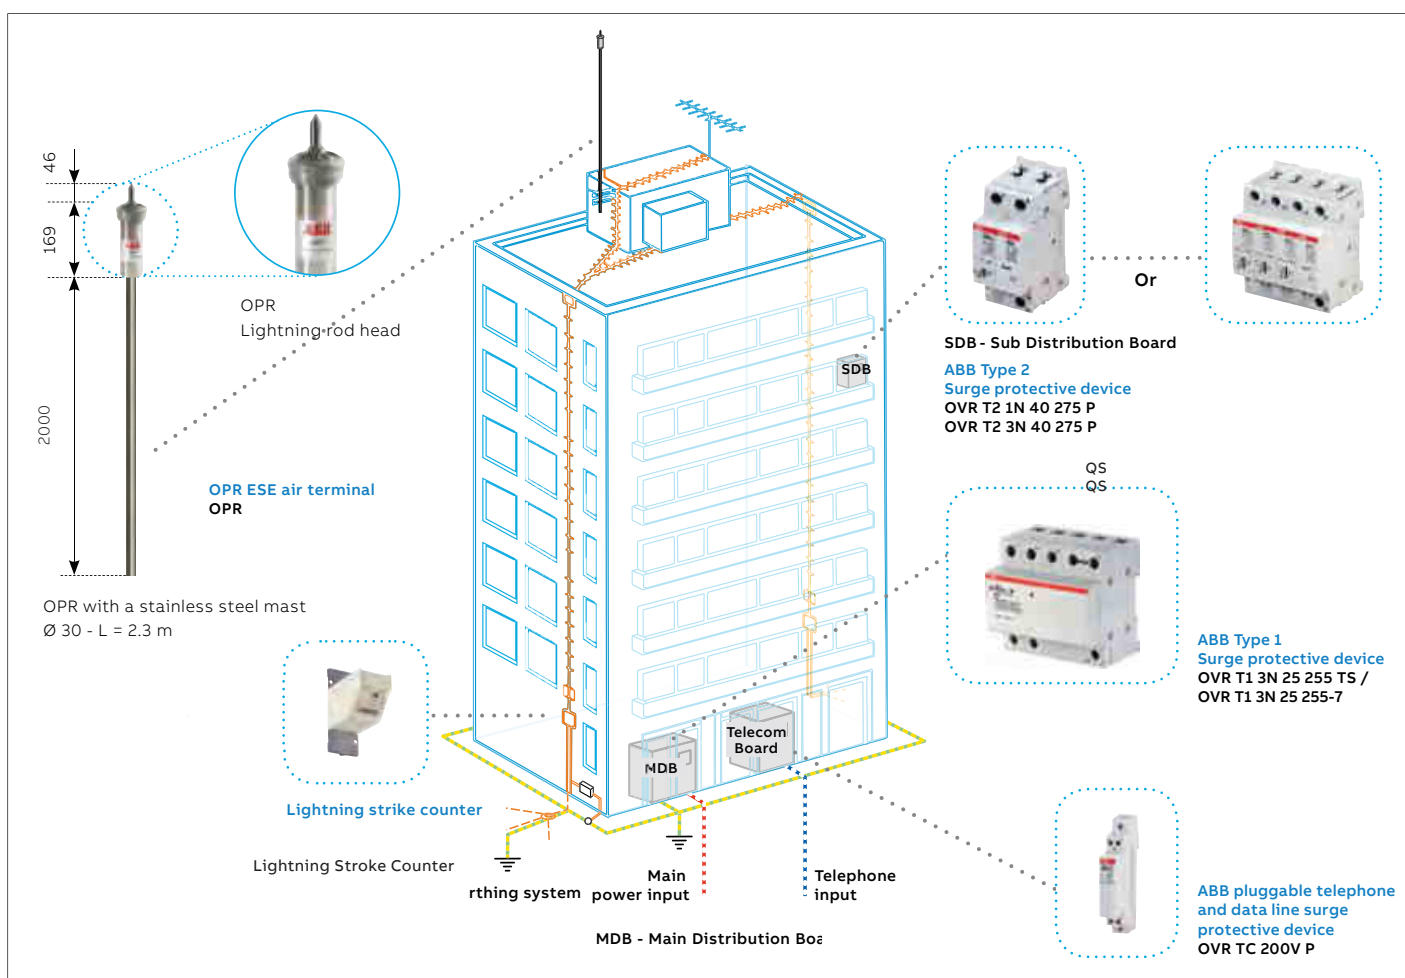

External lightning protection

Furse - Earthing and lightning protection

Furse provides world leading earthing, lightning and electronic systems protection from our own designed and manufactured products through to risk assessment and systems design advice.

Our renowned Furse range of earthing & lightning protection design services provide a unique total solution.

Expertise

Specialist advice from our fully qualified technical engineers - focusing on your earthing & lightning protection issues and concerns.

Experience

Experience to provide the optimum design - one that doesn't use more material than is necessary, saving you money.

Knowledge

Our knowledge of the latest products ensures a tailored design that can be installed using the most appropriate and up-to-date products.



Structural lightning protection

From Furse air termination systems including air rods and strike plates to capture lightning strikes, through to our comprehensive range of down conductors and lightning protection components which channel lightning energy safely to a Furse earth termination network.

- Air termination systems
- Lightning protection conductors
- Conductor clips, clamps and holdfasts
- Bimetallic connection components



Electronic systems protection

Our exhaustive range of equipotential bonding and transient overvoltage SPDs providing fully co-ordinated protection against transient overvoltages on all incoming and outgoing metallic service lines including power, data, signal & telecoms.

- Lightning equipotential bonding SPDs
- Mains power transient overvoltage SPDs
- Data, signal & telecommunication lines SPDs
- DC power & photovoltaic SPDs

Compliance, now & in the future

Furse designs comply with all recognised standards - national and international. Our engineers actively contribute to national and harmonised European / international standards, ensuring we remain at the forefront of new developments.

- BS EN/IEC 62305 protection against lightning
- NFPA 780 Standard for the installation of lightning protection systems
- IEEE Std 80:2000 IEEE guide for safety in AC substation grounding
- ENA TS 41-24 guidelines for the design, installation, testing & maintenance of main earthing systems in substations
- BS EN 50522:2010 - earthing of power installations exceeding 1.k Vac
- IS/IEC 62305 - protection against lightning



Earthing

A combination of Furse earth electrodes, soil conditioning, conductors and equipotential bonding bars provide an effective, low resistance dissipation from the lightning protection system to earth.

- Earth rods and conductor systems
- Mechanical earth clamps and bonds
- Soil conditioning agents
- Earth bars and equipotential bonding



FurseWELD - Exothermic welding

FurseWELD exothermic welding is a cost-efficient, self-contained system that uses the high temperature reaction of powdered copper oxide and aluminium, within a mould, to form permanent electrical connections.

- Moulds
- Powder
- Handle clamps
- Accessories

Section I: Auxiliary relays, tripping relays and timers

Type	Technical description	Auxiliary voltage	Type of mounting	Contact configurations	Typical applications	L.P. (₹)
Auxiliary relays						
CV2DJ	Single element auxiliary relay, self reset contacts with operation indicator	24/30/48/110/220/250 V DC	Flush mounting	2NO+0NC/ 1NO+1NC	Contact multiplication, signalling	2,040
CV2AJ	Single element auxiliary relay, self reset contacts with operation indicator	110/240 V AC	Flush mounting	2NO+0NC/ 1NO+1NC	Contact multiplication, signalling	2,490
CV2D2J	Two element auxiliary relay, self reset contacts with operation indicator	24/30/48/110/220/250 V DC	Flush mounting	4NO+0NC/ 2NO+2NC/ 3NO+1NC	Contact multiplication, signalling	2,825
CV2A2J	Two element auxiliary relay, self reset contacts with operation indicator	110/240 V AC	Flush mounting	4NO+0NC/ 2NO+2NC/ 3NO+1NC	Contact multiplication, signalling	3,280
P8nCH2J	Single element auxiliary relay, self reset contacts with operation indicator	24/30/48/110/125//220/250 V DC	Flush mounting	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	Contact multiplication, signalling and tripping	3,920
P8nCH2J	Single element auxiliary relay, self reset contacts without operation indicator	110/240 V AC	Flush mounting	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	Contact multiplication, signalling and tripping	4,380
P8nAHX	Single element auxiliary relay, self reset contacts without operation indicator	24/30/48/110/125//220/250 V DC	Plug-in base mounting	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	Contact multiplication, signalling and tripping	4,330
RXP8n	Single element auxiliary relay, self reset contacts without operation indicator	24/30/48/110/220/250 V DC	Combiflex mounting*	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	Contact multiplication, signalling and tripping	3,545
Supervision relays						
PN8nCH2J	No volt relay with reverse flag, self reset contacts	24/30/48/110/220 V DC	Flush mounting	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	DC supply supervision	3,900
PN8nCH2J	No volt relay with reverse flag, self reset contacts	110/240 V AC	Flush mounting	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	AC supply supervision	4,240
TCS	Trip circuit supervision relay	24/30/48 V DC 110-125/220-250 V DC/AC	Flush mounting	1NO+1NC+2C/O	Trip circuit supervision	4,485
RXTCS	Trip circuit supervision relay	24/30/48 V DC 110-125/220-250 V DC/AC	Combiflex mounting*	1NO+1NC+2C/O	Trip circuit supervision	4,565
UVT92M	Fuse failure relay	110V AC, 50 Hz, 30/110/220 V DC	Flush mounting		Fuse failure supervision	9,250

*Combiflex accessories need to be ordered separately. Check with your local ABB office.

Section II: Electro-mechanical high speed tripping relays, Bi-stable relays and static relays

Type	Technical description	Auxiliary voltage	Type of mounting	Contact configurations	Typical applications	L.P. (₹)
High speed tripping relays						
PQ5nCH2J	High speed tripping relay, hand reset contacts with operation indicator	24/30/48/110/125//220/250 V DC	Flush mounting	4NO+0NC/ 3NO+1NC	Low burden tripping	3,760
PQ5nCH2J	High speed tripping relay, hand reset contacts with operation indicator	110/240 V AC	Flush mounting	4NO+0NC/ 3NO+1NC	Low burden tripping	4,250
PQ8nCH2J	High speed tripping relay, hand reset contacts with operation indicator	24/30/48/110/125//220/250 V DC	Flush mounting	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	Low burden tripping	4,300
PQ8nCH2J	High speed tripping relay, hand reset contacts with operation indicator	110/240 V AC	Flush mounting	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	Low burden tripping	4,650
PQ8nC2JW	High speed high burden tripping relay, hand reset contacts with operation indicator	24-30/48/110-125//220-250 V DC	Flush mounting	6NO+0NC/ 5NO+1NC/ 4NO+2NC	High burden tripping	4,300
RXPQ8n	High speed tripping relay, hand reset contacts with operation indicator	24/30/48/110/220/250 V DC	Combiflex mounting*	7NO+0NC/ 6NO+1NC/ 5NO+2NC/ 4NO+3NC	Low burden tripping	3,640
PSU14n-2X	High speed tripping relay, electrically reset contacts, with operation indicator	110/220 V DC	Plug-in base mounting	14NO+0NC/ 13NO+1NC/ 12NO+2NC/ 11NO+3NC/ 10NO+4NC/ 9NO+5NC/ 8NO+6NC/ 7NO+7NC	High burden tripping	12,940
RXPSU14n	High speed tripping relay, electrically reset contacts with operation indicator	110/220 V DC	Combiflex mounting*	14NO+0NC/ 13NO+1NC/ 12NO+2NC/ 11NO+3NC/ 10NO+4NC/ 9NO+5NC/ 8NO+6NC/ 7NO+7NC	High burden tripping	12,940
PSU6n-X	High speed trip relay without operation indicator	110/220 V DC	Plug-in base mounting	6NO+0NC 5NO+1NC 4NO+2NC 3NO+3NC	High burden tripping	7,840
RXPSU6n	High speed trip relay without operation indicator	110/220 V DC	Combiflex mounting*	6NO+0NC 5NO+1NC 4NO+2NC 3NO+3NC	High burden tripping	7,840
PSU14nCJW	High speed high burden tripping relay, hand/ electrical reset contacts with operation indicator	110/220 V DC	Flush Mounting	14NO+0NC 13NO+1NC/ 12NO+2NC/ 11NO+3NC/ 10NO+4NC/ 9NO+5NC/ 8NO+6NC/ 7NO+7NC	High burden tripping	13,950
PSU6nCJW	High speed high burden tripping relay, hand/ electrical reset contacts with operation indicator	110/220 V DC	Flush Mounting	6NO+0NC 5NO+1NC/ 4NO+2NC/ 3NO+3NC	High burden tripping	8,460

Section II: Electro-mechanical high speed tripping relays, Bi-stable relays and static relays

Type	Technical description	Auxiliary voltage	Type of mounting	Contact configurations	Typical applications	L.P. (₹)
Bi-stable relays						
PSU6n-X	Bi-stable relay, electrically reset contacts without operation indicator	24/30/48/110/125//220/250 V DC	Plug-in base mounting	6NO+0NC/ 5NO+1NC/ 4NO+2NC/ 3NO+3NC	CB/ Isolation/ Earth switch/ Contact multiplication/ Voltage selection/ CT switching	7,125
PSU14n-2X	Bi-stable relay, electrically reset contacts with operation indicator	24/30/48/110/125//220/250 V DC	Plug-in base mounting	14NO+0NC/ 13NO+1NC/ 12NO+2NC/ 11NO+3NC/ 10NO+4NC/ 9NO+5NC/ 8NO+6NC/ 7NO+7NC	CB/ Isolation/ Earth switch/ Contact multiplication/ Voltage selection/ CT switching	11,750
RXPSU6n	Bi-stable relay, electrically reset contacts without operation indicator	24/30/48/110/125//220/250 V DC	Combiflex mounting*	6NO+0NC/ 5NO+1NC/ 4NO+2NC/ 3NO+3NC	CB/ Isolation/ Earth switch/ Contact multiplication/ Voltage selection/ CT switching	7,125
RXPSU14n	Bi-stable relay, electrically reset contacts, with operation Indicator	24/30/48/110/125//220/250 V DC	Combiflex mounting*	14NO+0NC/ 13NO+1NC/ 12NO+2NC/ 11NO+3NC/ 10NO+4NC/ 9NO+5NC/ 8NO+6NC/ 7NO+7NC	CB/ Isolation/ Earth switch/ Contact multiplication/ Voltage selection/ CT switching	11,750
Static protection relay						
IRXm	Circulating current relay	24/30/48 V DC 110-125/220-250 V DC	Flush mounting	2NO+1NC	Restricted earth fault protection for generators and transformers, high impedance differential protection for motors, generators	7,740
VHXM22A	Under relay without time delay	63.5/110/240 V AC, 40-80%, 24/30/48/110/220 V DC	Flush mounting	6NO+0NC/ 3NO+3NC/	Under voltage protection/ Residual (dead bus) monitoring	8,560
VHXM22B	Under voltage relay with variable time delay	63.5/110/240 V AC, 40-80%, 0.1-1.0 sec/0.5-5.0 sec/1-10 sec, 24/30/48/110/220 V DC	Flush mounting	6NO+0NC/ 3NO+3NC/	Under voltage protection	12,560
VHXM23A	Over voltage relay without time delay	63.5/110/240 V AC, 80-140%, 24/30/48/110/220 V DC	Flush mounting	6NO+0NC/ 3NO+3NC/	Over voltage relay	8,560
VHXM23B	Over voltage relay with variable time delay	63.5/110/240 V AC, 80-140%, 0.1-1.0 sec/0.5-5.0 sec/1-10 sec, 24/30/48/110/220 V DC	Flush mounting	6NO+0NC/ 3NO+3NC/	Over voltage relay	12,560

*Combiflex accessories need to be ordered separately. Check with your local ABB office.

Section III: Numerical protection and control relays

Type	Product description	L.P. (₹)
Relion® 605 series		
REF601	Numerical feeder protection and control relay	Upon request
REJ601	Numerical feeder protection relay	
REM601	Numerical motor protection and control / Motor protection relay	
REJ603	Numerical self-powered feeder protection relay	
Relion® 611 series		
REF611	Numerical feeder protection and control relay	Upon request
REM611	Numerical motor protection and control relay	
REB611	Numerical busbar and multipurpose differential protection and control relay	
REU611	Numerical voltage protection and control relay	
Relion® 615 series		
REF615	Numerical feeder protection and control relay	Upon request
REM615	Numerical motor protection and control relay	
RED615	Numerical line differential protection and control relay	
RET615	Numerical transformer protection and control relay	
REV615	Numerical capacitor bank protection and control relay	
REU615	Numerical voltage protection and control relay	
REC615	Grid automation, numerical remote monitoring and control relay	
RER615	Grid automation, numerical recloser protection and control relay	
REG615	Numerical generator protection and control relay	
Relion® 620 series		
REF620	Numerical feeder protection and control relay	Upon request
RET620	Numerical transformer protection and control relay	
REM620	Numerical motor protection and control relay	
Relion® 630 series		
REF630	Numerical feeder protection and control relay	Upon request
RET630	Numerical transformer protection and control relay	
REG630	Numerical generator protection and control	
REM630	Numerical motor protection and control	
Relion® 640 series		
REX640	All-in-one protection for advanced power generation and distribution applications	Upon request

Visit "<http://new.abb.com/medium-voltage/distribution-automation>" for catalogues.

Prices "Upon request" for Numerical relays shall be provided as per the configuration requirement.

Section IV: Grid automation, FBT, arc protection, load shedding, engineering tools and miscellaneous items

Type	Product description	L.P. (₹)
RIO600	Remote I/O unit	Upon request
	Power supply module	
	Communication module	
	Digital input module with 8 inputs	
	Digital output module with 4 outputs	
	RTD/mA input module with 4 inputs	
	Analog output module with 4 outputs	
COM600	Grid automation controller	
PML630	Power management/Compact load-shedding solution	
REK510	Current injection device for rotor earth fault protection	
PCM600	Protection and control IED manager	
REA10	Arc fault protection system	
SUE3000	High speed transfer device (Fast bus transfer)	
RTU	RTU560/RTU511	
ARC600	Wireless controller for RMU/Feeder automation	
ARG600	Wireless gateway for connection over cellular network	
ARR600	Wireless I/O gateway for connection over cellular network	
ARM600 (M2M)	Communication server manages all arctic product family	

Visit "<http://new.abb.com/medium-voltage/distribution-automation>" for catalogues.

Prices "Upon request" for numerical relays shall be provided as per the configuration requirement.

Type 2 co-ordination

MS132/MS165 DOL-NS-IE1/IE2/IE3

SCPD type : MMS

Rated voltage : 400/415 V.

Short circuit current: 50 kA

Starting type : DOL-NS

Co-ordination type: IEC Type 2

Overload relay: embedded

Frequency: 50-60 Hz

Motor			Manual motor starter		Contactor
Rated power	Rated current		Instantaneous tripping current	Current setting range	
[kW]	[A]	Type	[A]	[A]	Type
0.06	0.2	MS132-0,25	2.44	0.16 - 0.25	A9
0.09	0.3	MS132-0,40	3.9	0.25 - 0.40	A9
0.12	0.44	MS132-0,63	6.14	0.40 - 0.63	A9
0.18	0.6	MS132-0,63	6.14	0.40 - 0.63	A9
0.25	0.85	MS132-1,0	11.5	0.63 - 1.00	A9
0.37	1.1	MS132-1,6	18.4	1.00 - 1.60	A9
0.55	1.5	MS132-1,6	18.4	1.00 - 1.60	A9
0.75	1.9	MS132-2,5	28.75	1.60 - 2.50	A9
1.1	2.7	MS132-4,0	50	2.50 - 4.00	A16
1.5	3.6	MS132-4,0	50	2.50 - 4.00	A16
2.2	4.9	MS132-6,3	78.75	4.00 - 6.30	A26
3	6.5	MS132-10	150	6.30 - 10.00	A26
4	8.5	MS132-10	150	6.30 - 10.00	A26
5.5	11.5	MS132-12	180	8.00 - 12.00	A26
7.5	15.5	MS132-16	240	10.00 - 16.00	A30
11	22	MS132-25	375	20.00 - 25.00	A30
15	29	MS132-32	480	25.00 - 32.00	A30
18.5	35	MS165-42	630	30.00 - 42.00	A63
22	41	MS165-54	810	40.00 - 54.00	A63
25	46.6	MS165-54	810	40.00-54.00	A75
30	45.5	MS165-65	975	52.00-65.00	A75

Type 2 co-ordination

MS132/MS165 SD-NS-IE1/IE2/IE3

Co-ordination type: IEC Type 2

SCPD type: MMS

Rated voltage : 400/415 V

Short circuit current: 50 kA.

Starting type : SD-NS

Overload relay: Embedded

Frequency : 50-60 Hz

Rated power [kW]	Rated current		Instantaneous tripping current [A]	Current setting range			
	[A]	Type		[A]	Line	Delta	Star
0.06	0.20	MS132-0,25	3.13	0.16 - 0.25	A9	A9	A9
0.09	0.30	MS132-0,40	5.0	0.25 - 0.40	A9	A9	A9
0.12	0.44	MS132-0,63	7.88	0.40 - 0.63	A9	A9	A9
0.18	0.60	MS132-0.63	7.88	0.40 - 0.63	A9	A9	A9
0.25	0.85	MS132-1,00	12.5	0.63 - 1.00	A9	A9	A9
0.37	1.10	MS132-1,60	20.0	1.00 - 1.60	A9	A9	A9
0.55	1.50	MS132-1,60	20.0	1.00 - 1.60	A9	A9	A9
0.75	1.90	MS132-2,50	31.25	1.60 - 2.50	A9	A9	A9
1.1	2.70	MS132-4,00	50	2.50 - 4.00	A26	A26	A26
1.5	3.60	MS132-4,00	50	2.50 - 4.00	A26	A26	A26
2.2	4.90	MS132-6,30	78.75	4.00 - 6.30	A26	A26	A26
3.0	6.5	MS132-10.00	150	6.30-10.00	A26	A26	A26
4.0	8.5	MS132-10.00	150	6.30-10.00	A26	A26	A26
5.5	11.5	MS132-16.00	240	10.00-16.00	A26	A26	A26
7.5	18.5	MS132-20.00	300	16.00-20.00	A30	A26	A26
11.0	22.0	MS132- 25.00	375	20.00-25.00	A30	A26	A26
15.0	29.0	MS132- 32.00	480	25.00-32.00	A30	A26	A26
15.0	29.0	MS165 -32.00	480	23.00-32.00	A40	A40	A40
18.5	35.0	MS165 -42.00	630	30.00-42.00	A40	A40	A40
22.0	41.0	MS165 -54.00	810	40.00-54.00	A50	A40	A40
25.0	46.6	MS165 -54.00	810	40.00-54.00	A63	A40	A40
30.0	55.0	MS165 -65.00	975	52.00-65.00	A63	A40	A40

Type 2 co-ordination

MCCB DOL-NS

SCPD type: MCCB
 Rated voltage: 400/415 V
 Short circuit current: 50 kA
 Starting type: DOL-NS
 Coordination type: IEC Type 2 / IE1 / IE2
 Overload relay: TOL
 Frequency: 50-60 Hz

Motor		Moulded case circuit breakers		Contactor		Overload relay
Rated power	Rated current	Instantaneous tripping current		Current setting range		
[kW]	[A]	Type	[A]	Type	Type	[A]
0.37	1.1	XT2S160 MF 2	28	A9	TA25DU1.4	1 - 1.4
0.55	1.5	XT2S160 MF 2	28	A9	TA25DU1.8	1.3 - 1.8
0.75	1.9	XT2S160 MF 2	28	A9	TA25DU2.4	1.7 - 2.4
1.1	2.7	XT2S160 MF 4	56	A9	TA25DU4	2.8 - 4
1.5	3.6	XT2S160 MF 4	56	A16	TA25DU5	3.5 - 5
2.2	4.9	XT2S160 MF 8.5	120	A26	TA25DU6.5	4.5 - 6.5
3	6.5	XT2S160 MF 8.5	120	A26	TA25DU8.5	6 - 8.5
4	8.5	XT2S160 MF 12.5	175	A30	TA25DU11	7.5 - 11
5.5	11.5	XT2S160 MF 12.5	175	A30	TA25DU14	10 - 14
7.5	15.5	XT2S160 MA 20	210	A30	TA25DU19	13 - 19
11	22	XT2S160 MA 32	288	A30	TA42DU25	18 - 25
15	29	XT2S160 MA 52	392	A50	TA75DU42	29 - 42
18.5	35	XT2S160 MA 52	469	A50	TA75DU42	29 - 42
22	41	XT2S160 MA 52	547	A50	TA75DU52	36 - 52
30	55	XT2S160 MA 80	840	A63	TA75DU63	45 - 63
37	66	XT2S160 MA 80	960	A75	TA75DU80	60 - 80
45	80	XT2S160 MA 100	1200	A95	TA110DU110	80 - 110
55	97	XT3S250 MA 160	1440	A110	TA110DU110	80 - 110
75	132	XT3S250 MA 200	1800	A145	TA200DU175	130 - 175
90	160	XT3S250 MA 200	2400	A185	TA200DU200	150 - 200
110	193	T5S400 PR221-I In320	2720	AF205	EF205-210	63 - 210
132	230	T5S400 PR221-I In400	3200	AF265	EF370-380	115 - 380
160	280	T5S400 PR221-I In400	4000	AF305	EF370-380	115 - 380
200	350	T5S630 PR221-I In630	5040	AF370	EF370-380	115 - 380
250	430	T6S630 PR221-I In630	6300	AF460	EF460-500	150 - 500
290	520	T6S800 PR221-I In800	8000	AF580	EF750-800	250 - 800
315	540	T6S800 PR221-I In800	8000	AF580	EF750-800	250 - 800
355	610	T6S800 PR221-I In800	8000	AF750	EF750-800	250 - 800

Type 2 co-ordination

MCCB SD-NS

SCPD type: MCCB
 Rated voltage: 400/415 V
 Short circuit current: 50 kA
 Starting type: SD-NS
 Coordination type: IEC Type 2 / IE1 / IE2
 Overload relay: TOL
 Frequency: 50-60 Hz

Motor		MCCB		Contactor			Thermal release	
Pe [kW]	Ie [A]	Type	Im [A]	Line type	Delta type	Star type	Type	[A]
18.5	35	XT2S160 MA52	469	A50	A50	A26	TA75DU25	18-25
22	41	XT2S160 MA52	547	A50	A50	A26	TA75DU32	22-32
30	55	XT2S160 MA80	720	A63	A63	A30	TA75DU42	29-42
37	66	XT2S160 MA80	840	A75	A75	A30	TA75DU52	36-52
45	80	XT2S160 MA100	1050	A75	A75	A30	TA75DU63	45-63
55	97	XT2S160 MA100	1200	A75	A75	A40	TA75DU63	45-63
75	132	XT3S250 MA160	1700	A95	A95	A75	TA110DU90	66-90
90	160	XT3S250 MA200	2000	A110	A110	A95	TA110DU110	80-110
110	195	XT3S250 MA200	2400	A145	A145	A95	TA200DU135	100-135
132	232	T5S400 PR221-I In320	2880	A145	A145	A110	EF205-210	60-200
160	282	T5S400 PR221-I In400	3600	A185	A185	A145	EF205-210	60-200
200	350	T5S630 PR221-I In630	5040	AF265	AF265	AF190	EF370-380	115-380
250	430	T6S630 PR221-I In630	6300	AF265	AF265	AF190	EF370-380	115-380
290	520	T6S630 PR221-I In630	8000	AF580	AF580	AF400	EF750-800	250-800
315	540	T6S800 PR221-I In800	8000	AF580	AF580	AF400	EF750-800	250-800
355	610	T6S800 PR221-I In800	8000	AF580	AF580	AF400	EF750-800	250-800



ABB low voltage air circuit breakers

Service and retrofit solutions



ABB's circuit breaker retrofit solution is a cost-effective alternative to the complete replacement of existing low voltage switchgear. ABB Service experts conduct audits on existing installations to recommend the ideal solution and ensure the optimum return on investment. Retrofitting encompasses the replacement of phased-out devices with current technology air circuit breakers by adapting them both mechanically and electrically to suit the existing switchgear. The result is a major improvement in reliability, safety, and performance. ABB Service is a full system provider for retrofit solutions, from the initial recommendation and design, through manufacturing and testing, up to installation and commissioning.

www.abb.com/lowvoltage



Introduction

ABB Service

ABB Service is more than a simple Service!

ABB is a pioneering technology leader for utilities, industries, transportations and infrastructures.

The company was found in 1988 by the merger between ASEA and Brown Bover & Cie (BBC), two of the most important electrical companies of the last century.

ABB has extensively invested in Service developing advanced solutions aim to guarantee the continuous revamping of products and systems according to the technology progress.

Spare Parts

Spare Parts availability is the key of a successful Service!

A spare part is a replaceable product's component fundamental to ensure the functioning of the system to which it belongs.


Having original spare parts always at your disposal means guarantee of the highest level of performance to your plant, reducing significantly the risk of failure as well as the down-time due to the maintenance.

ABB guarantees 100 % of compatibility of all Spare Parts that are going to replace the defective components of your equipment.

All Spare Parts are equipped with instruction sheets to enable a correct and safety assembly and are delivered in short times in order to fulfill customer's needs.

Service portfolio

Life Cycle Management

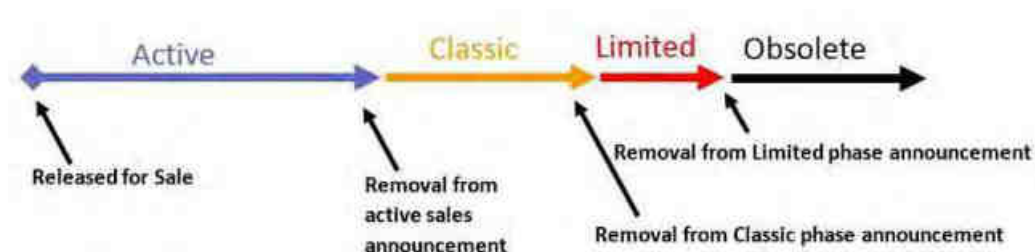

Active standard development, production and sale.


Classic maintenance phase of the product: spare parts availability is guaranteed for replacing in existing plants.

Limited spare parts are available. The production of the CB's whole range is not guaranteed, and the technical support is limited.

Obsolete technical support is no more guaranteed. The production of the CB's whole range has ended but spare parts might be available. Retrofit solutions are available.

Service portfolio

Low voltage products division delivers a vast range of services to cover the whole product lifecycle. The services offered by ABB's low voltage products and systems span the entire value chain, from the moment a customer makes the first enquiry to disposal and recycling of the product. Throughout the value chain, ABB provides training, technical support and customized contracts. All of this is supported by one of the most extensive country sales and service network.

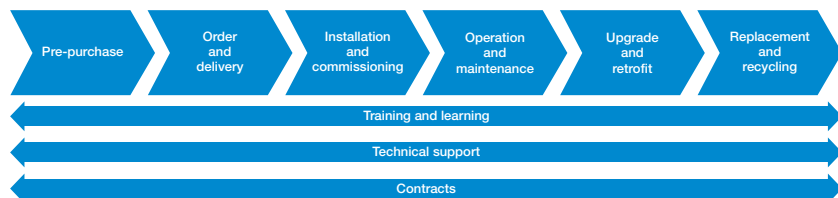

Installation and commissioning

ABB provides comprehensive installation and commissioning services to achieve a problem-free start up, by following installation and commissioning procedures. The use of service personnel from ABB LP service ensures that the switchgear is installed in a safe and correct way.

Operation and maintenance

ABB can guide the customer through a fast and efficient fault finding procedure as well as analyze the operation of the product and the customer's process. From site surveys to preventive, predictive maintenance and reconditioning, ABB has all the options covered to keep its customers' processes operational.

Upgrade and retrofits

An existing ABB product can often be upgraded to the latest software or hardware to improve the performance of the application. Existing processes can be economically modernized by upgrading with the latest technology.

Retrofits

Replacing old LV Switchgear of any make with ABB's latest versions can be done using the ABB special conversion kits which enable quick installation without structural modifications to the original compartment. In addition complete "turnkey" solutions are available. Specific conversion kits have been developed in order to replace old components with new ones that can be found in the latest switchgears.

Replacement and Recycling

ABB can advise on the best replacement products while ensuring that the existing products are disposed of in a way that meets all local regulations.

Entire value chain services

The main services available throughout the entire value chain include:

Training and learning – Hands on

ABB LP service carries out training programs. Those trainings can be either general or bespoke and have the aim of providing the personnel in charge of management/maintenance with the necessary know-how to achieve an excellent level of operating ability in certain situations. The manager of an electrical site can find it convenient to have certain maintenance capabilities available within his own team.

The courses mainly cover:

- Operating equipment
- Maintenance principles
- Repairs for small faults

Technical support

At each stage of the value chain, an ABB expert is available to offer advice to keep the customer's process or plant operational.


Spare parts

Availability of original spare parts is essential for fast and efficient maintenance activities. This becomes even more critical when the product was produced some years ago and has components in it which are no longer in production. ABB LP service is the only one able to supply original and guaranteed spare parts. These can be easily selected and ordered through the authorized channel.

Maintenance contracts

In addition to the corrective maintenance of a faulty unit, which includes any type of emergency intervention, there is a complete preventive maintenance service package, ensuring those who manage the plant gain considerable advantages in terms of reliability, safety and reduction of costs. Also customized contracts can be devised between the customer and ABB. Depending on the severity of the intervention needed, it can often be done on-site by our skilled and experienced engineers and is a faster way of resolution. ABB LP service has an effective service network across the country and dedicated service workshops. For all your service requirements, contact our nearest Sales office.

Benefits of maintenance contracts

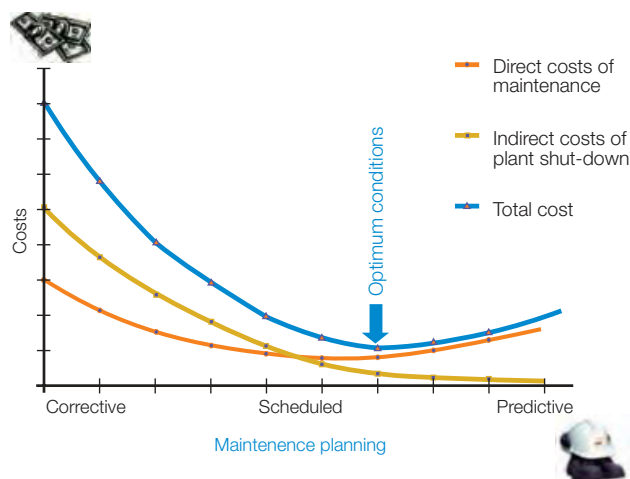

Materials

Technical material - SOC

Selected optimized coordination (SOC) tables

ABB provides coordination tables for the selection of low voltage equipment, specifically tested for starting and protecting IE3 motors in the SOC tool.

Essential, enhanced and advanced solutions as introduced in this brochure can be selected there. Product selection for different types of starting methods are available as well, including direct-on-line, star-delta and softstarters. Usage of coordination tables helps reduce the time for selection and design of solutions as well as the risk of unwanted downtime, e.g. caused by nuisance tripping. This provides protection and safety, further driving down the total cost of ownership

more than **1800**
tested and validated
coordination tables
available

You can find SOC tables [here](#)

SOC - SELECTED OPTIMIZED COORDINATION

Coordination tables for Motor protection

→ 1 Info on IE3 Motors

→ 1 L1 Motor Coordination: BETA

Clear selection

Standard: ☒ IEC ☐ UL

Motor efficiency class:

☒ ANY ☐ IE1/IE2/IE3 N/H ☐ IE3/NE/HE

Motor Rated Power [kW]	Rated voltage	Short-Circuit Current [kA]	Starter Type	Coordination type	Protection device	Overload relay
0.06	230Vac	3	DOL-NE	IEC Type 1	ACB	Embedded
0.09	230Vac	5	DOL-HD	IEC Type 2	Fuses	TOL
0.12	240Vac	12	SD-NE		MCBE	EDL
0.18	400Vac	16	SD-HD		MHS	UMC
0.25	415Vac	20	SS-NS-IL			
0.37	440Vac	22	SS-NS-ID			
0.55	460Vac	25				
0.75	480Vac	27				
1.1	500Vac	30				
1.5	525Vac	35				

Search

Export PDF

Results: 1368 internal low-voltage records.

20 Number of Records to show

ACB, 415 Vac, 42 kA, DOL-NE, Coordination type: IEC Type 2, Overload relay: Embedded, Motor efficiency class: IE1/IE2/IE3 N/H

Motor		SACE Emax Circuit Breaker		Inst. Trip Current		Max. allowed load current	Status
Motor Rated Power [kW]	Rated Current (FLA) [A]	Type		[A]		[A]	Table

IE3/IE4 Motor

NEW

SOC - Selected Optimized Coordination

Motor protection | Selectivity | Back-up | Other Devices protection

Standard: ☒ IEC ☐ UL

Starting type: ☒ Normal start ☐ Heavy duty

Motor Efficiency Class - Design: ☐ Any ☐ IE1/IE2/IE3/IE4 - N/H ☒ IE3/IE4 - NE/HE

Table status: ☒ Any ☐ Active ☐ Legacy

Starter Type	Rated voltage	Motor Rated Power	Short-Circuit Current	Coordination type	Protection device	Overload protection
Direct-on-line starter	230 V AC	0.06 kW	25 kA	IEC Type 1	Switch fuse	Embedded
Star-Delta starter	400 V AC	0.09 kW	35 kA	IEC Type 2	Molded case circuit-breaker	Thermal overload relay
	415 V AC	0.12 kW	36 kA		Manual motor starter	Electronic overload relay
	440 V AC	0.18 kW	42 kA			Universal motor control
	500 V AC	0.25 kW	50 kA			
	525 V AC	0.37 kW	65 kA			
	690 V AC	0.44 kW	70 kA			

131 Coordination tables found

Export PDF | PDF tools | Reset filters


Materials

Technical material - e-Configure

e-Configure is a product and application configuration tool for low voltage products and solutions that provides customers a quick and easy configuration process.

- Browse for products by categories, product code or description
- Retrieve product related information (specs, prices, availability)
- Select and configure products and accessories
- Create, modify and order the bill of material
- Re-order custom configured units

You can find e-Configure [here](#)

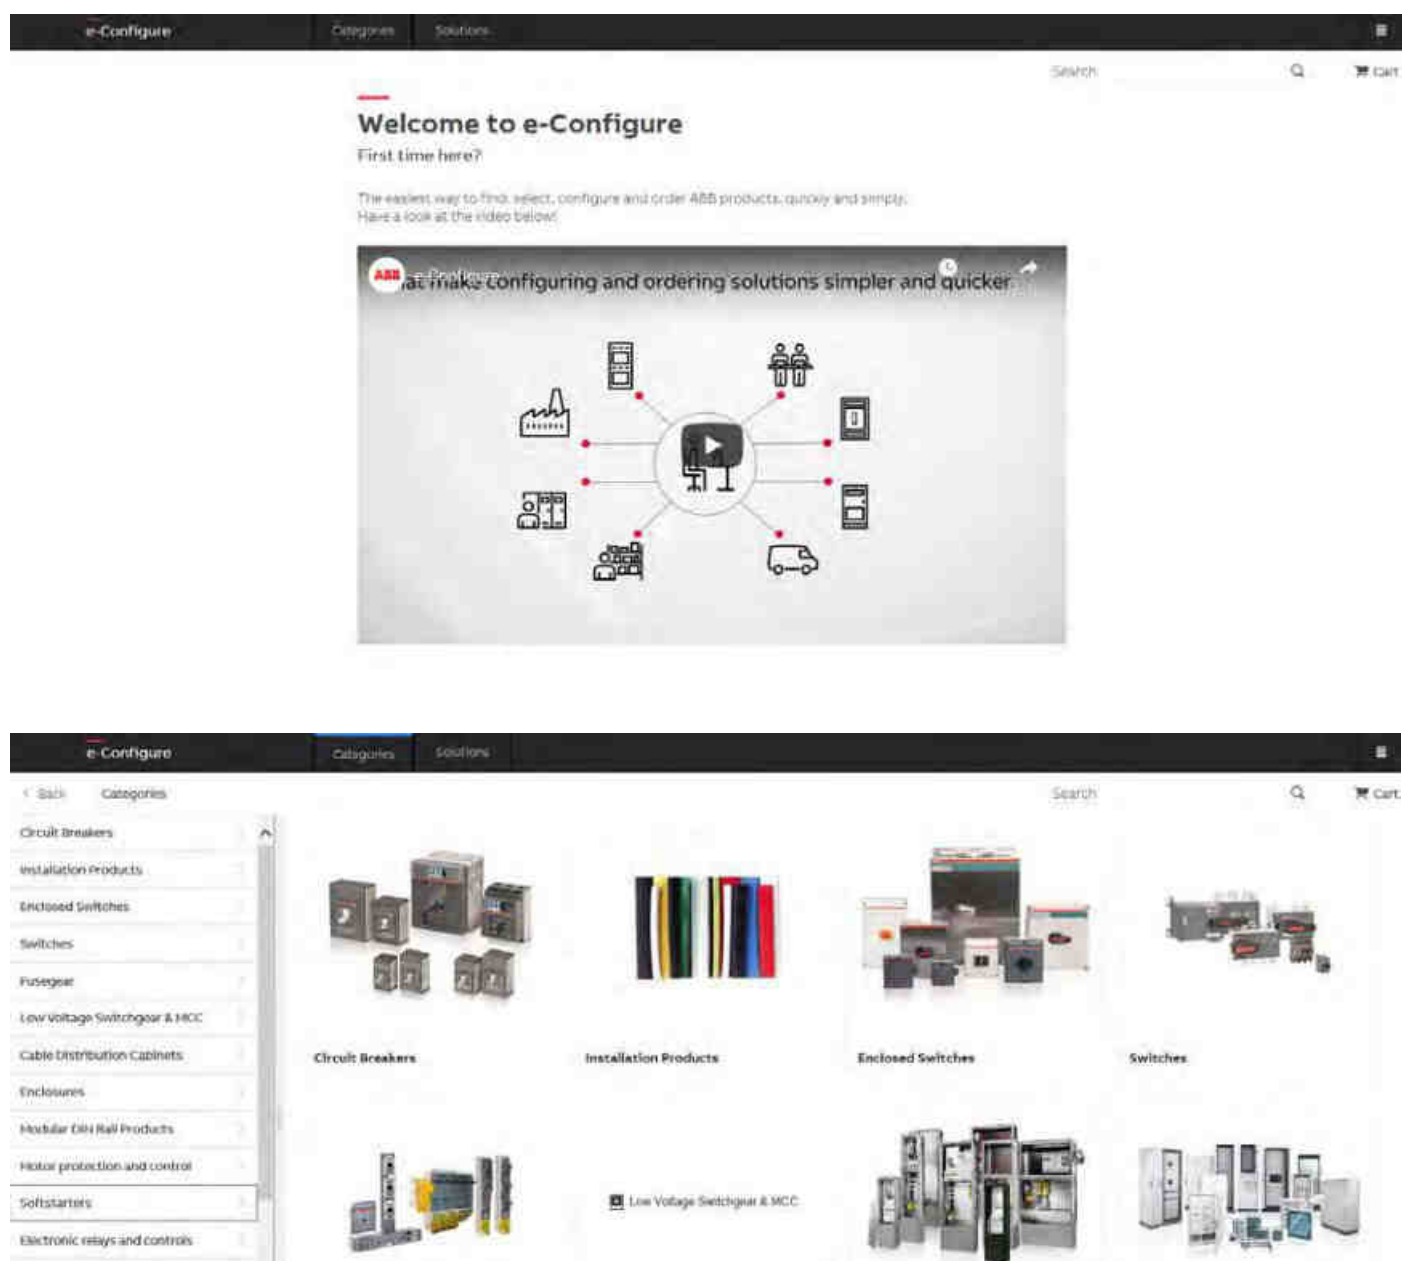

Materials

Technical material - 3D Portal

Cadenas provides 3D and 2D data for ABB Motor Starting & Safety products.

- Download CAD models in different file formats
- Generate Pdf data sheets


You can find 3D Portal [here](#)



Electrification India has launched eMart, a B2B & B2C online marketplace in August 2020 for bringing ABB products and solutions closer and nearer to our customers than ever.

Customers will have easy access to more than 6,000 ABB home and industrial products and solutions in one of the fastest growing e-commerce markets in the world.

This unique B2B & B2C platform is the first of its kind in the industry, owing to its dynamic, price transparent model. It aims to provide an equally fair and favorable experience to both ABB distributors and customers. ABB eMart also provides a dynamic model to empower our partners to set their own competitive pricing for the products they sell on the platform, while simultaneously providing customers with a choice of the best deals to suit their specific needs.

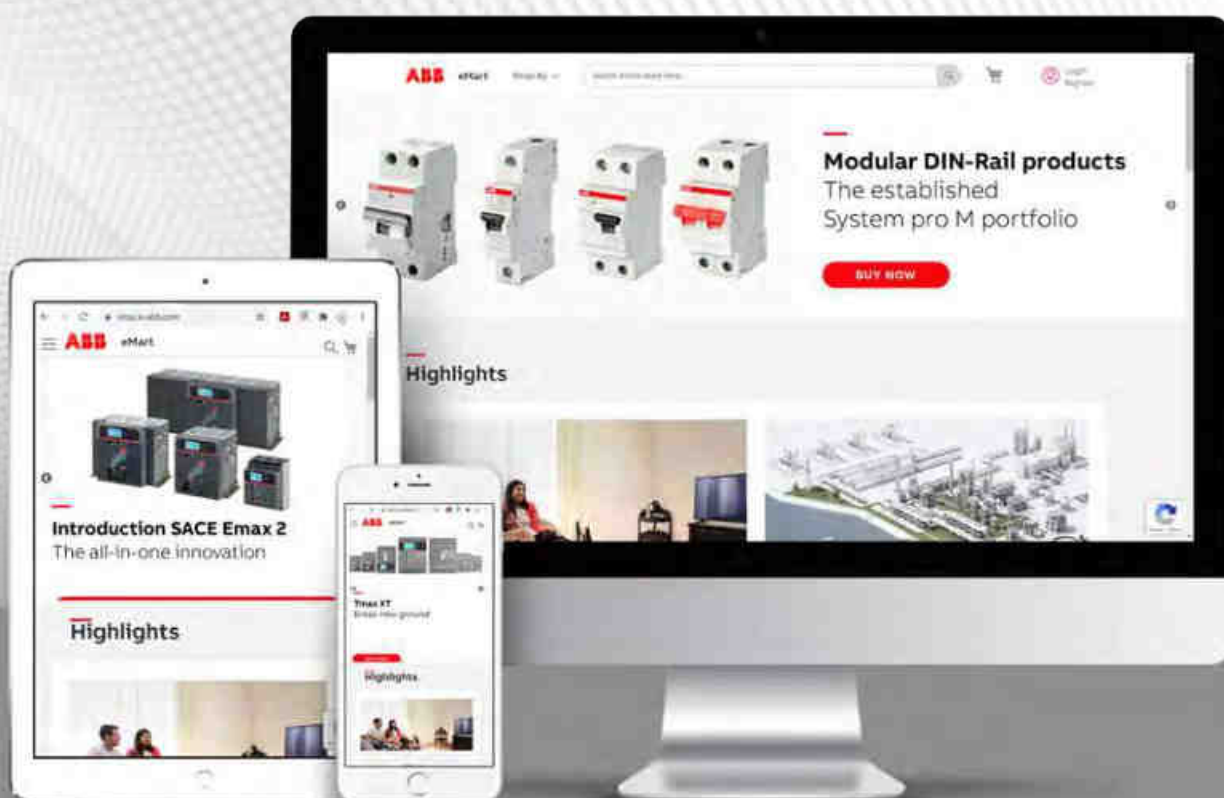

Click below to find offerings from eMart.



MCCB



Isolator



MCB



Meter



RCD



Switches, Sockets & Accessories



Fusegear



Transfer Switch



Switch Disconnecter



Industrial Plug & Socket



Contactor



Interface Products



Manual Motor Starters



Measuring and Monitoring Relays



Pilot Device



Power Supply



Safety Products



Time Relays



Universal Motor Controller



Overload Relays

General conditions of sale

General terms and conditions of sale:

- All prices mentioned in this price list are in Indian Rupees (INR) and this supersedes all previous price lists
- Prices are based on Ex-work basis
- Maximum retail prices (MRPs) mentioned in the publication are maximum recommended selling prices
- List prices (LPs) mentioned are exclusive of all taxes
- Prices are subject to revision without prior notice

Terms of delivery: Ex- work, Nelamangala or any other ABB warehouse in India

Standard delivery terms

Ex-stock or 30 working days

Address of Nelamangala warehouse

ABB INDIA LIMITED

#126, Hanchipura Village, Kasaba Hobli
Nelamangala Taluk, Bangalore-562 123

Tel: +91 80 2770 0081

Tel: +91 80 2770 0082

Tel: +91 80 2770 0083

Address of Works

Nelamangala

Survey No: 88/3, 88/4, Basavanhalli, Kasaba Hobli,
Nelamangala Taluk, Bangalore - 562 123

Karnataka, India

Tel: +91 80 2294 6618

Tel: +91 80 2294 6619

Fax: +91 80 2294 9999

Peenya

Plot No. 5 & 6, II Phase,
Peenya Industrial Area, Bangalore - 560 058

Karnataka, India

Tel: +91 80 22949354/9585

Fax: +91 80 22949389

Vadodara

Maneja Works, Maneja,
Vadodara - 390 013

Gujarat, India

E-mail: in-da.sales@abb.com

Tollfree No: 1800-4200-707

Warranty policy

ABB guarantees the supply according to the law. Upon expiration, the warranty expires even if the devices have not been operated for any reason. In the case of faults, as long as this does not depend on assembly errors by the customer or third parties, on incorrect use of the materials, lack of or incorrect maintenance, normal wear and tear, faults caused by inexperience or negligence by the purchaser or by transport, by the improper storage of the materials, or failure by the customer to adopt measures to reduce eventual dysfunction, overload with respect to the contractual limits, by unauthorized intervention, by tampering or action effected by the customer, to force majeure, ABB will, throughout the warranty period, repair or replace any defective part of supply free of charge, in the shortest possible time, at its premises. Where the repair cannot be executed at ABB premises, except as otherwise agreed, all the supplementary or relevant expenses shall be borne by the customer.

Repair or replacement will be executed only if the customer has performed all the obligations to that date. The customer may not suspend performance of the obligations in any case in which this warranty is invoked. The term for the repair or replacement of the faulty supply will be agreed by ABB and the customer. The shipment of any supply claimed to be faulty by the customer to ABB and subsequently by ABB to the customer, shall be at the risk and under the responsibility of the customer, who shall arrange adequate insurance coverage. The supply repaired or replaced is shipped at the expense and risk of the customer. Any dispute about a shipment has no effect on the remainder of the supply. The products replaced by ABB become the property of ABB.

General conditions of sale

Any claim regarding the supply, machinery, plant or components not compliant with the specifications or the contractual documentation must be raised in writing, within a maximum term of 8 days from delivery, when the time limit for action expires. In the case of systems, this term is 60 days from execution of the disputed service when the time limit for action expires.

In the case of latent defects, the terms indicated above run from the date of discovery. Once the warranty period has expired, claims are not accepted, even for latent defect. Where the claim is timely and justified, ABB's obligation is limited to replacement of the goods found not in compliance or repetition of execution of the non-compliant service, excluding all rights to the Customer to seek termination of the contract and/or compensation of damages.

With reference to the provision of spare parts, ABB reserves the right to provide materials either from the original supplier or from equivalent supplier.

Warranty period:

1. **Breakers & switches:** The warranty period is 12 months from the date of commissioning or 18 months from the date of ABB's invoice, whichever is earlier.
2. **Control products:** The warranty period is 12 months from the date of commissioning or 18 months from the date of ABB's invoice, whichever is earlier.
3. **Enclosures & Din Rail components:**
 - Components of SB200M and SDB200 will have 5 Years warranty from the date of ABB's invoice, if mounted inside the ABB Distribution boards. If non- ABB enclosure is used, Warranty period is 12 months from the date of commissioning or 18 months from the date of ABB's invoice, whichever is earlier.
 - All other range of products : 12 months from the date of commissioning or 18 months from the date of ABB's invoice, whichever is earlier.

- If products are altered, dismantled, rectified or tampered. Warranty states is not company's entire liability. This does not extend to cover consequential losses or damage or installation cost arising from defective products. Since product improvement is a continuous process, the data furnished in this brochure may undergo revision. For the latest information, you may contact our nearest sales office.

4a. Wiring accessories:

- Standard Switches & Sockets (without LED Lamp) : 10 years from the date of ABB's invoice.
- Electronic Products (with LED Lamp) : 12 months from the date of commissioning or 24 months from the date of ABB's invoice, whichever earlier.
- ABB mounting boxes are not covered under warranty.
- Warranty for all the products will not be valid, If products are not used with original ABB mounting boxes.
- If products are altered, dismantled, rectified or tampered. Warranty states is not company's entire liability. This does not extend to cover consequential losses or damage or installation cost arising from defective products. Since product improvement is a continuous process, the data furnished in this brochure may undergo revision. For the latest information, you may contact our nearest sales office.

- 4b. Plug & sockets:** The warranty period is 12 months from the date of commissioning or 18 months from the date of ABB's invoice, whichever is earlier.

Liability clause:

The manufacturer shall not be liable for any consequential loss, injury or damages attributable to defect or failure of its products.





ABB India Helpline.

Technical telephone support for customers
and channel partners.

Toll free: (BSNL) +91 1800 420 07 07

website: new.abb.com/low-voltage